SHARP SERVICE MANUAL

SENP76EF20H/2

DA-100W - CHASSIS

PAL SYSTEM COLOUR TELEVISION

DOLBY SURROUND

PRO • LOGIC
(ONLY FOR MODEL 76EF-20H)

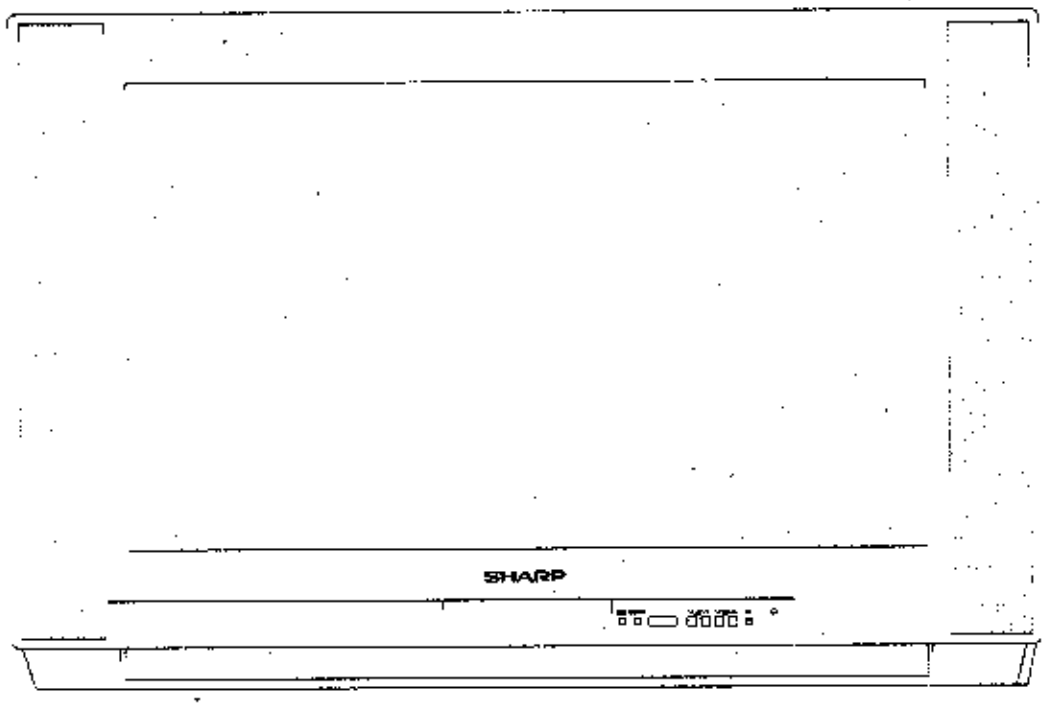

MODELS 76EF-19H 76EF-20H

In the interests of user safety (required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

CONTENTS

ELECTRICAL SPECIFICATION 2
IMPORTANT SERVICE NOTES 3
SERVICE ADJUSTMENTS 4
PRINTED WIRING BOARDS 19
SCHEMATIC DIAGRAM 23
CONNECTION DIAGRAM 32
BLOCK DIAGRAM 33
PARTS LIST 34

SHARP CORPORATION

ELECTRICAL SPECIFICATIONS

- Power Input ....220-240 VAC 50Hz

- Power Consumption
  Normal Operating 200W (76EF-19H)
  235W (76EF-20H)
  Stand-by Operating ....3W max.

- Audio Power

Output Rating
Center ....15W (MPO)
Front L..15W (MPO)
Front R ....15W (MPO)
Rear ....7,5+7,5W (MPO)
Subwoofer ....30W (MPO)

Speakers
Center (in TV set).............................15W 8 Ω
Front L (in TV set) ....15 W 8 Ω
Front R (in TV set)............................15W 8 Ω
Rear.............................7,5 W (External) 16 Ω
Rear.............................7,5 W (External) 16 Ω
Subwoofer......................30W (External) 4 Ω

- Convergence ....Self Converging System

- Focus................................Bi-Potencial Electrostatic

- Sweep ....Magnetic

- Intermediate Frequencies

Picture IF Frequency ....38.9 MHz
Sound Carrier Trap ....33.4 MHz
Adjacent Sound Carrier Trap.........................40.4 MHz
Adjacent Picture Carrier Trap ....31.9 MHz

- Aerial Input Impedance ....75 Unbalanced

- Tuning Ranges ....48.25 MHz to 855.25 MHz
  CATV Special Channels

- Convergence

Set brigthness control to get total picture tube cathode current of 600 microampere under no signal condition. Maximun necessary correction of each picture tube cathode current to get 8550 degrees K+1MPCD screen temperature should not exceded 15% of its original value.
X=0.290 Y=0.284

Specifications are subject to change without prior notice.

WARNING

The chassis in this receiver is partially hot. Use an isolation transformer between the line cord plug and power receptacle, when servicing this chassis.
To prevent electric shock, do not remove cover. No user-serviceable parts inside. Refer servicing to qualified service personnel.

Special note

76EF-20H contains a DOLBY PRO LOGIC SURROUND DECODER.
Manufactured under license from Dolby Laboratories Licensing Corporation.
DOLBY, the double-D symbol DD and "PRO LOGIC" are trademarks of Dolby Laboratories Licensing Corporation.

DD DOLBY SURROUND
PRO • LOGIC

SCHEMATIC DIAGRAM AUDIO UNIT 76EF-20H

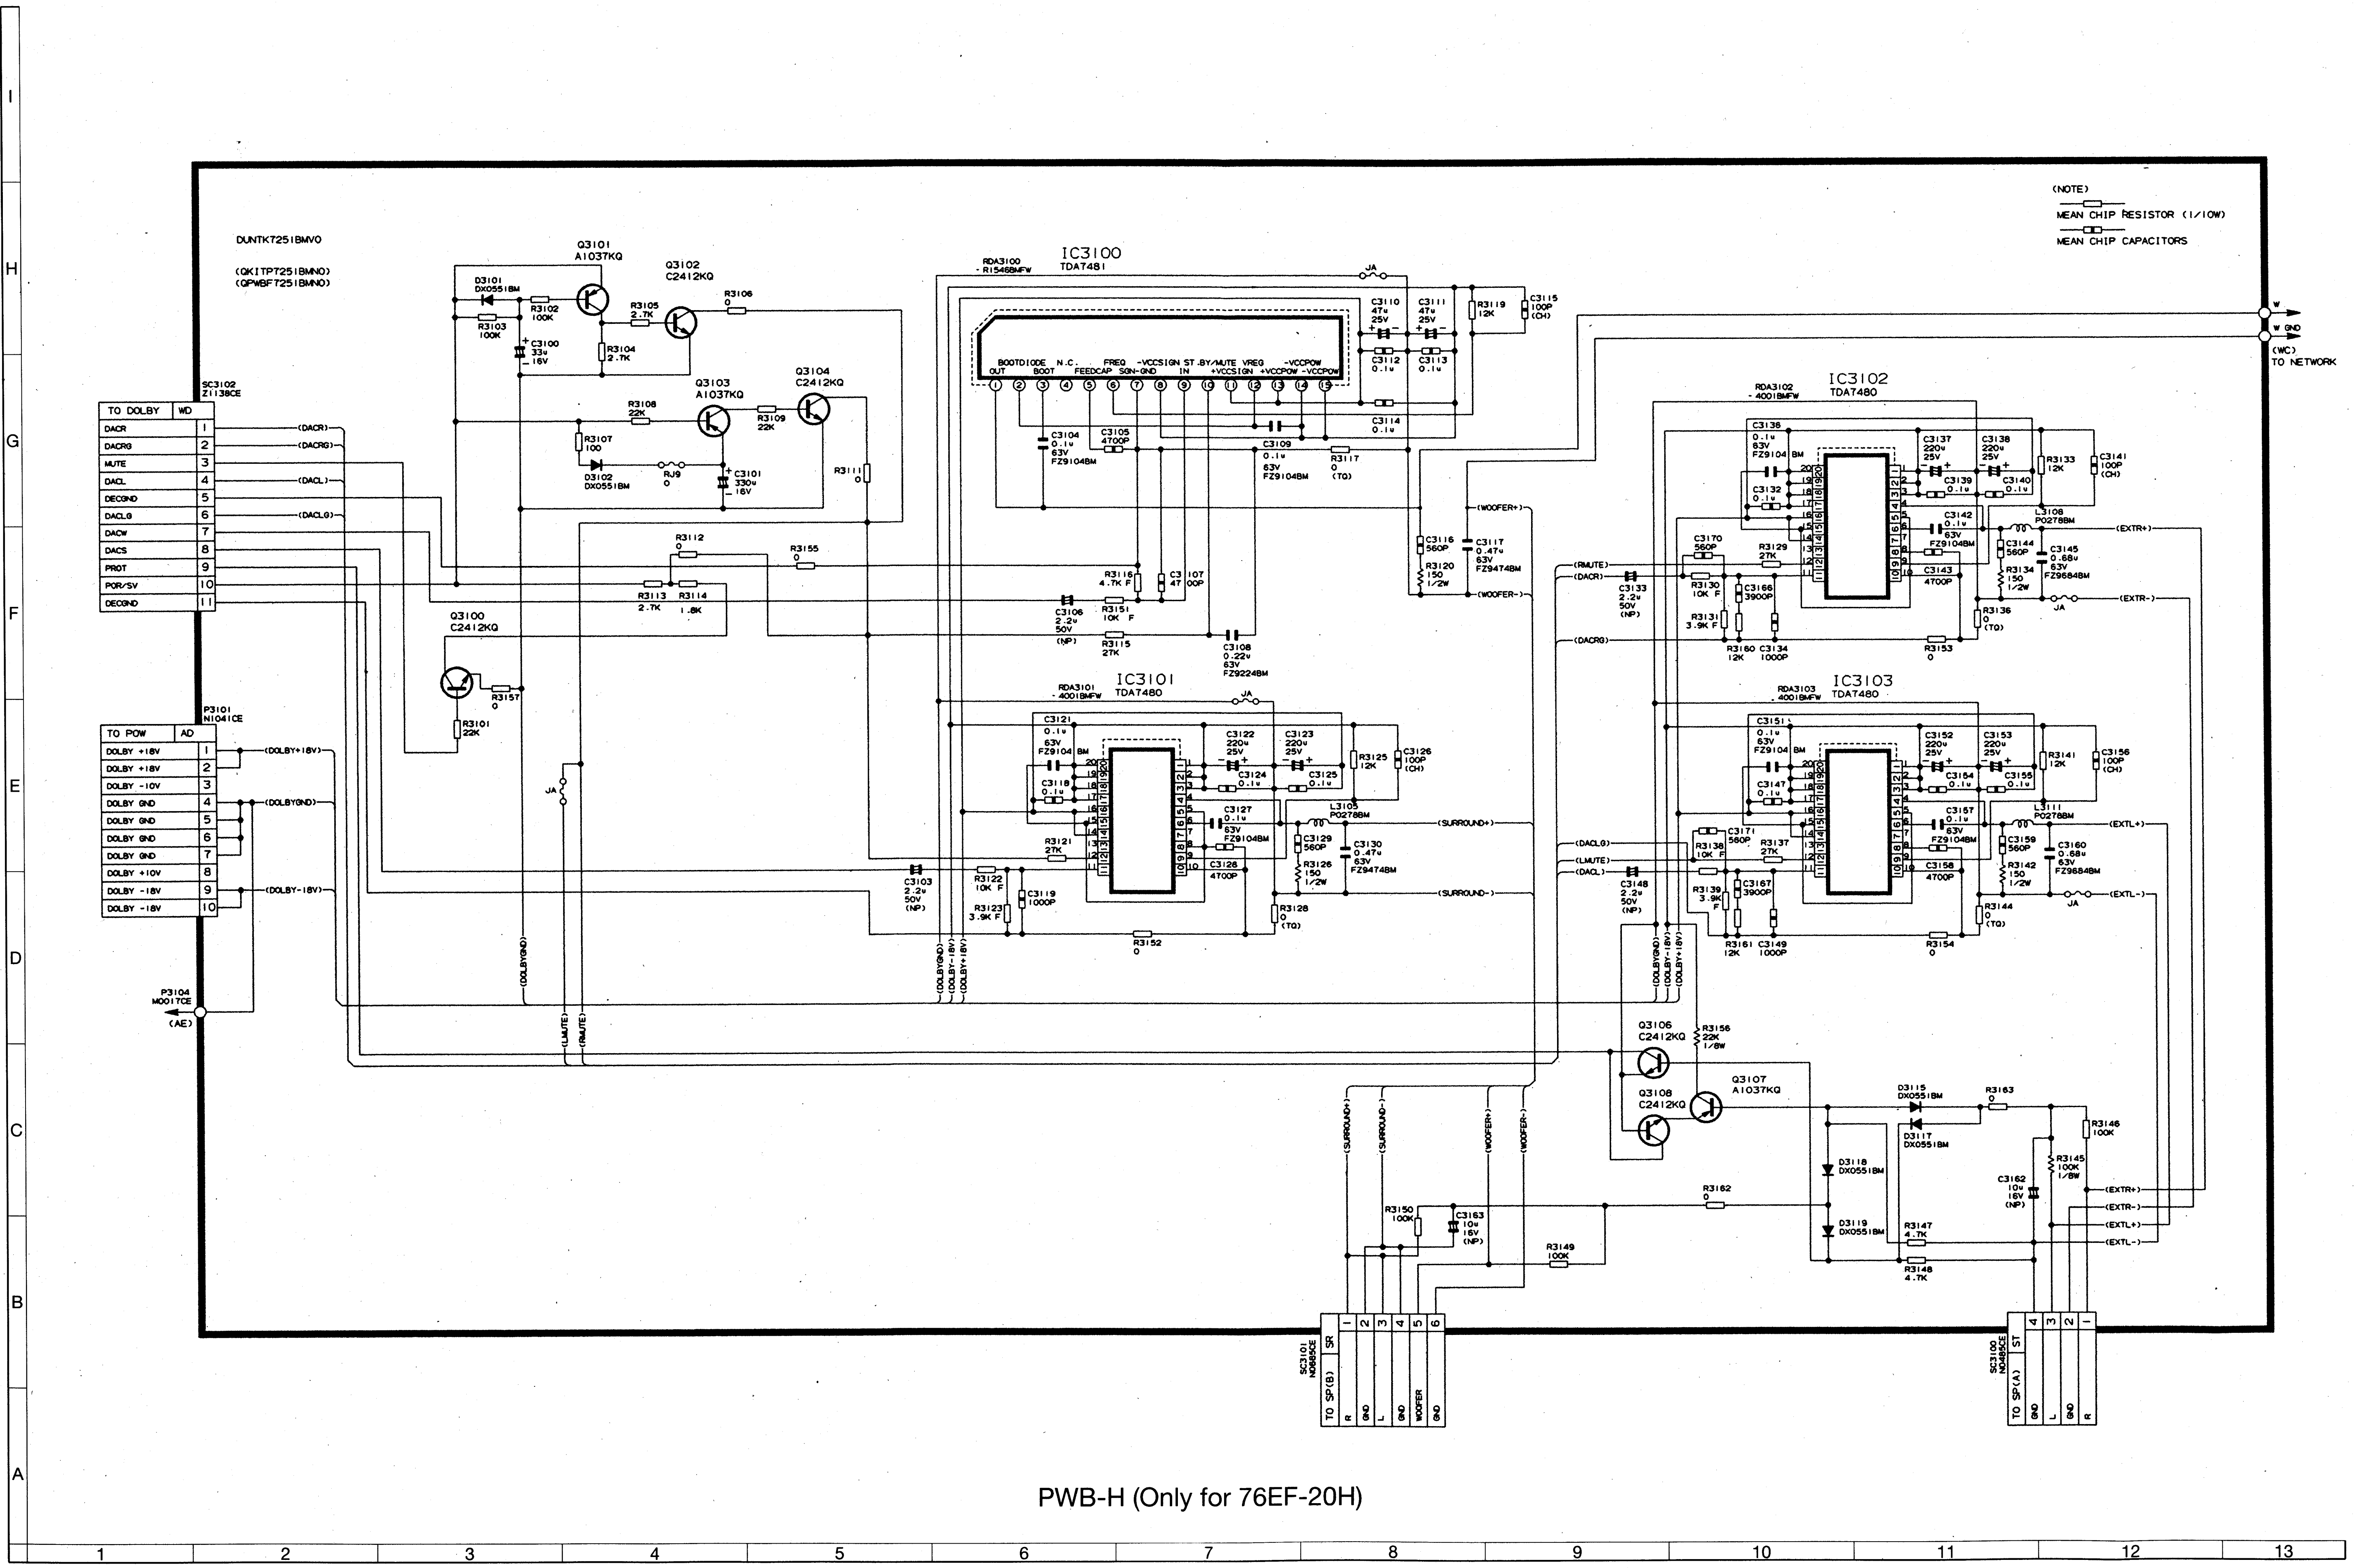
DUNTKT251BMV0
(QKITPT251BMN0)
(QPWBFT251BMN0)
SC3102 Z1138CE
TO DOLBY
DACR
DACRG
MUTE
DACL
DECGND
DACLG
DACW
DACS
PROT
POR/SV
DECGND
P3101 N1041CE
TO POW
DOLBY +18V
DOLBY +18V
DOLBY -10V
DOLBY GND
DOLBY GND
DOLBY GND
DOLBY GND
DOLBY +10V
DOLBY -18V
DOLBY -18V
P3104 M001TCE
(AE)
Q3101 A1037KQ
Q3102 C2412KQ
Q3103 A1037KQ
Q3104 C2412KQ
Q3100 C2412KQ
D3101 DX0551BM
D3102 DX0551BM
RDA3100 - R1546BMFW
IC3100 TDA7481
BOOTDIODE OUT
BOOT
N.C.
FEEDCAP
FREQ
-VCCSIGN SGN-GND
ST.BY/MUTE IN
VREG +VCCSIGN
-VCCPOW +VCCPOW -VCCPOW
RDA3101 - 4001BMFW
IC3101 TDA7480
RDA3102 - 4001BMFW
IC3102 TDA7480
RDA3103 - 4001BMFW
IC3103 TDA7480
(NOTE)
MEAN CHIP RESISTOR (1/10W)
MEAN CHIP CAPACITORS
W
W GND
(WC)
TO NETWORK
(WOOFER+)
(WOOFER-)
(SURROUND+)
(SURROUND-)
(EXTR+)
(EXTR-)
(EXTL+)
(EXTL-)
(RMUTE)
(LMUTE)
(DACR)
(DACRG)
(DACL)
(DACLG)
(DOLBY+18V)
(DOLBYGND)
(DOLBY-18V)
L3105 P0278BM
L3108 P0278BM
L3111 P0278BM
Q3106 C2412KQ
Q3107 A1037KQ
Q3108 C2412KQ
D3115 DX0551BM
D3117 DX0551BM
D3118 DX0551BM
D3119 DX0551BM
SC3101 N0685CE
TO SP(B)
SR
R
GND
L
GND
WOOFER
GND
SC3100 N0485CE
TO SP(A)
ST
GND
L
GND
R
A B C D E F G H I
1 2 3 4 5 6 7 8 9 10 11 12 13

PWB-H (Only for 76EF-20H)

SCHEMATIC DIAGRAM MOTHER UNIT 76EF-20H

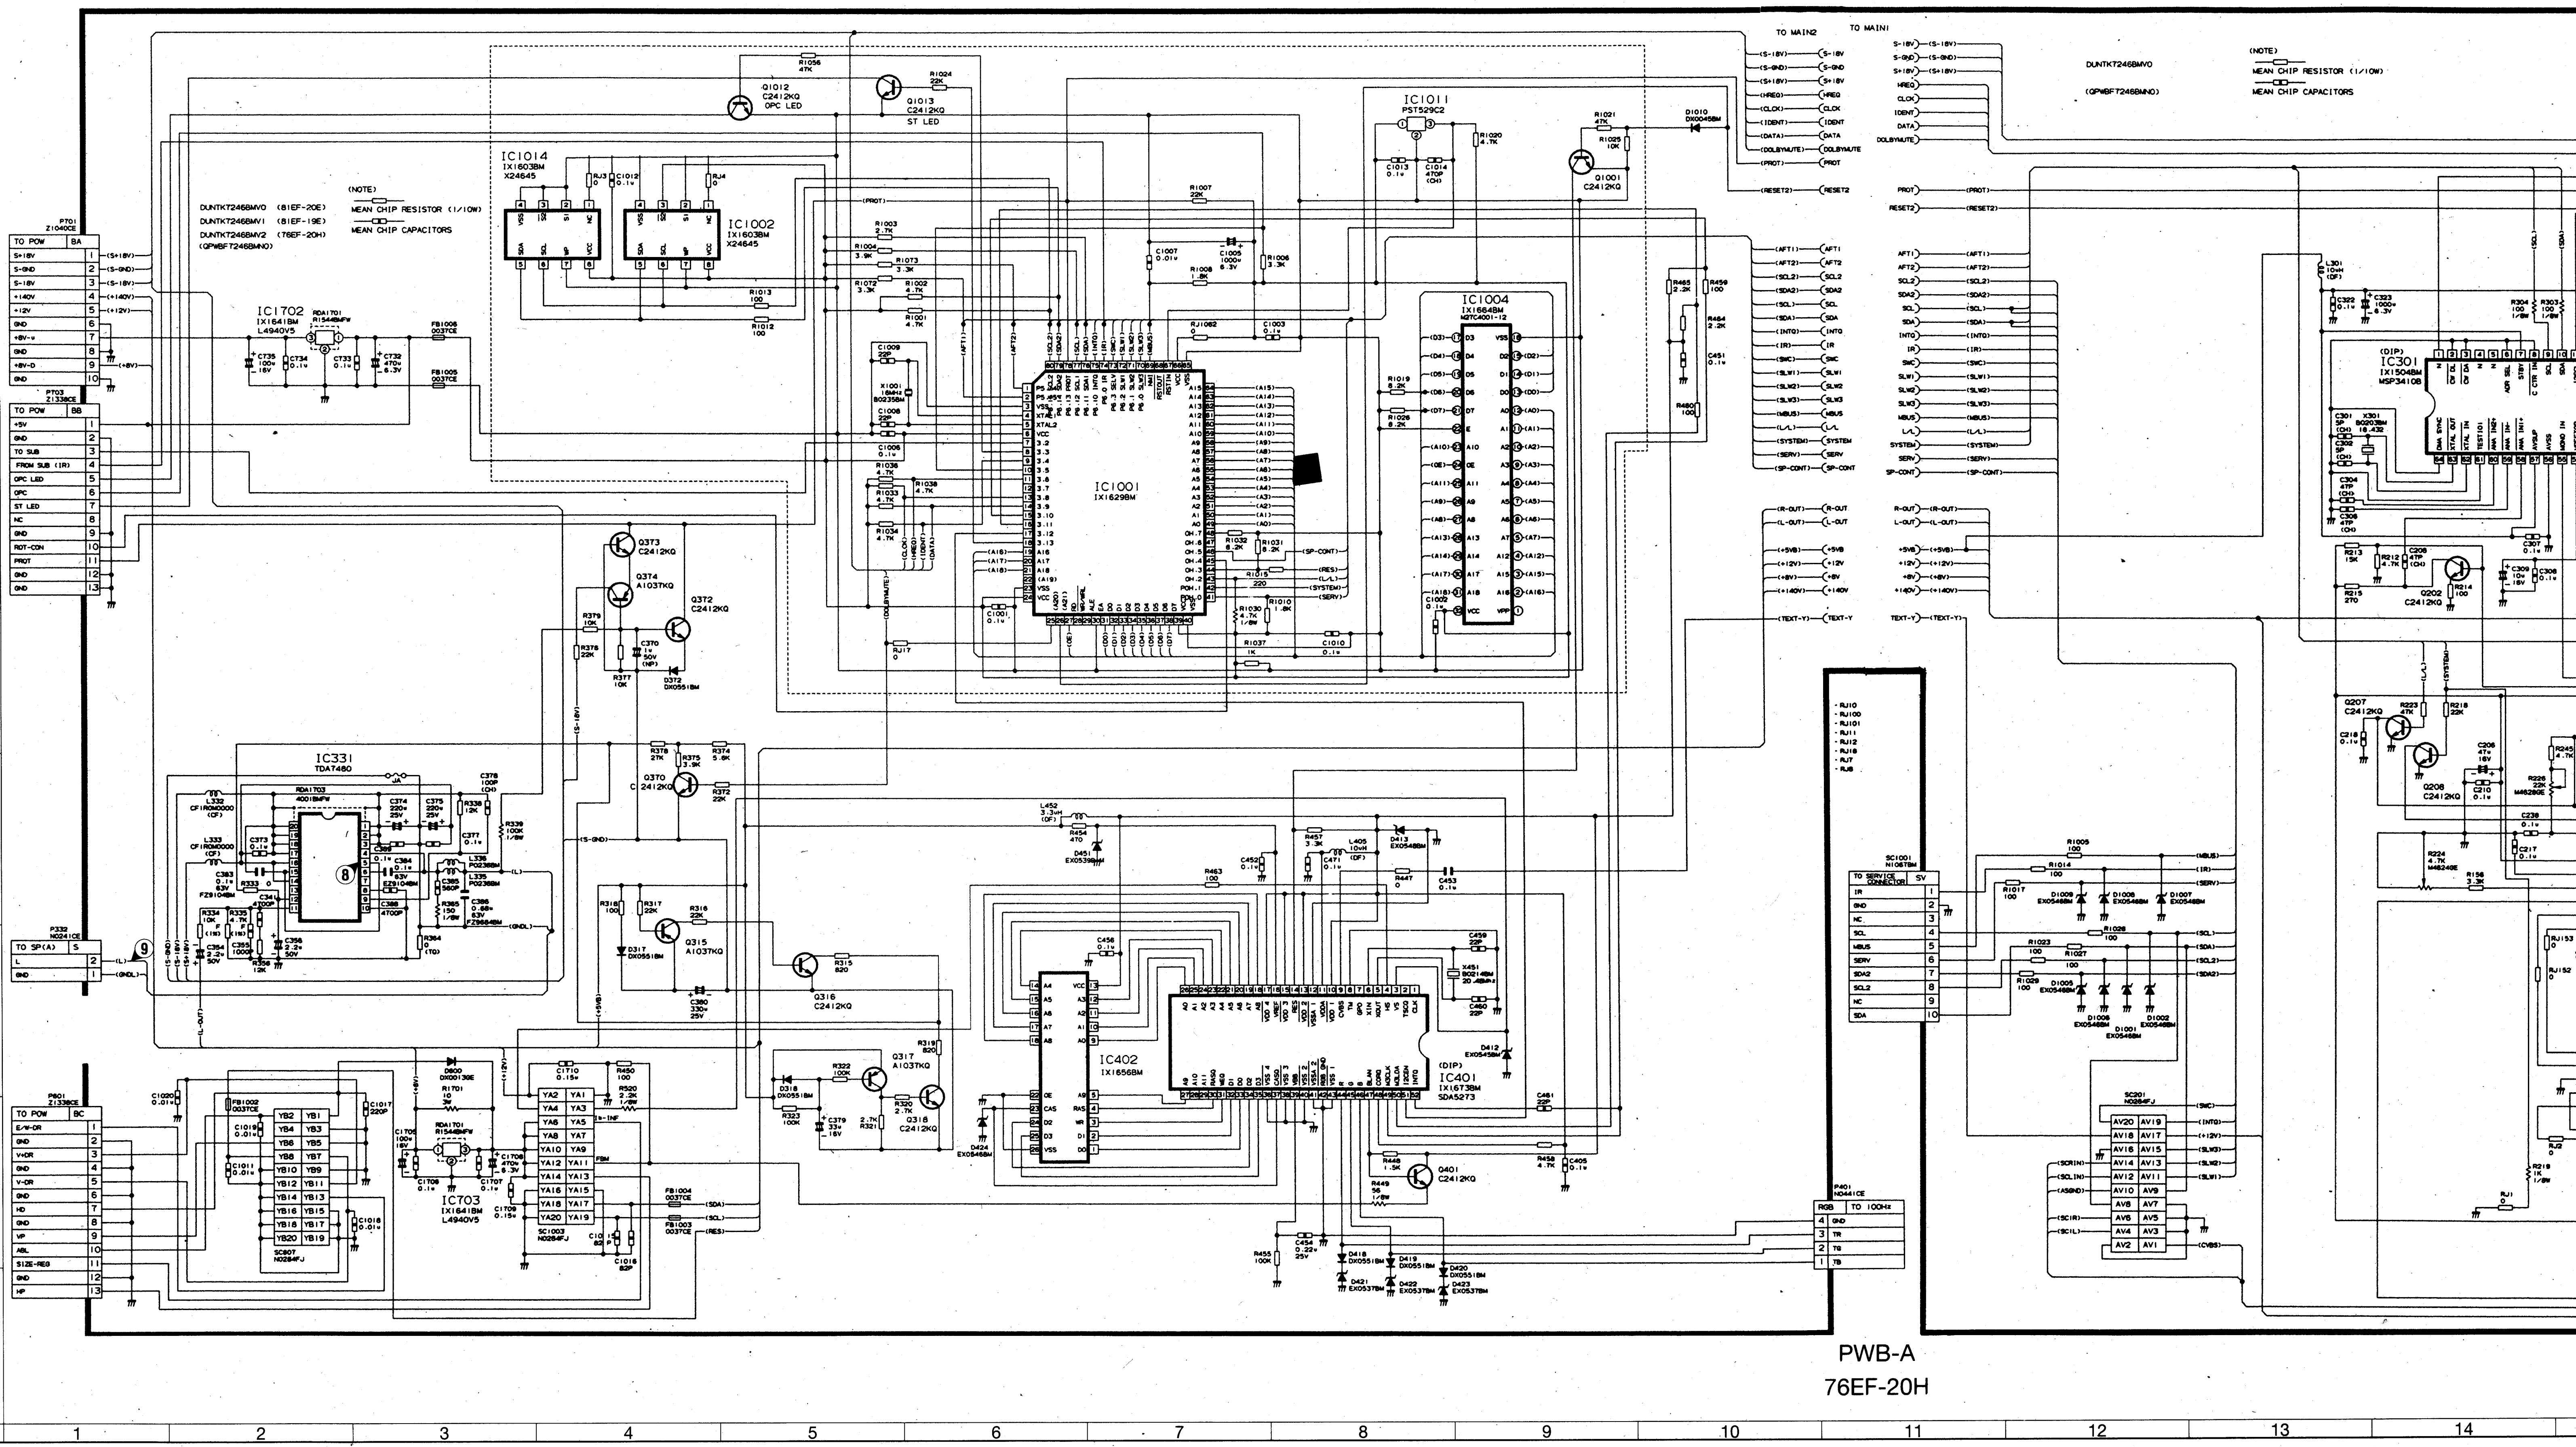
TO MAIN2
TO MAIN1
(NOTE)
MEAN CHIP RESISTOR (1/10W)
MEAN CHIP CAPACITORS
DUNTKT2468MV0 (81EF-20E)
DUNTKT2468MV1 (81EF-19E)
DUNTKT2468MV2 (76EF-20H)
(QPWBF7246BMNO)
DUNTKT2468MV0
(QPWBF7246BMNO)
P701
Z1040CE
TO POW BA
P703
Z1338CE
TO POW BB
P601
Z1338CE
TO POW BC
P332
N0241CE
TO SP(A) S
IC1014
IX1603BM
X24645
IC1002
IX1603BM
X24645
IC1011
PST529C2
IC1001
IX1629BM
IC1004
IX1664BM
M27C4001-12
IC1702
IX1641BM
L4940V5
IC331
TDA7480
IC402
IX1656BM
(DIP)
IC401
IX1673BM
SDA5273
IC703
IX1641BM
L4940V5
(DIP)
IC301
IX1504BM
MSP3410B
Q1012
C2412KQ
OPC LED
Q1013
C2412KQ
ST LED
Q1001
C2412KQ
Q373
C2412KQ
Q374
A1037KQ
Q372
C2412KQ
Q370
C2412KQ
Q315
A1037KQ
Q316
C2412KQ
Q317
A1037KQ
Q318
C2412KQ
Q401
C2412KQ
Q202
C2412KQ
Q207
C2412KQ
Q208
C2412KQ
X1001
16MHz
SC1001
N1067BM
TO SERVICE CONNECTOR SV
P401
N0441CE
RGB TO 100Hz
SC807
N0284FJ
SC1003
N0284FJ
SC201
N0284FJ
PWB-A
76EF-20H
1
2
3
4
5
6
7
8
9
10
11
12
13
14

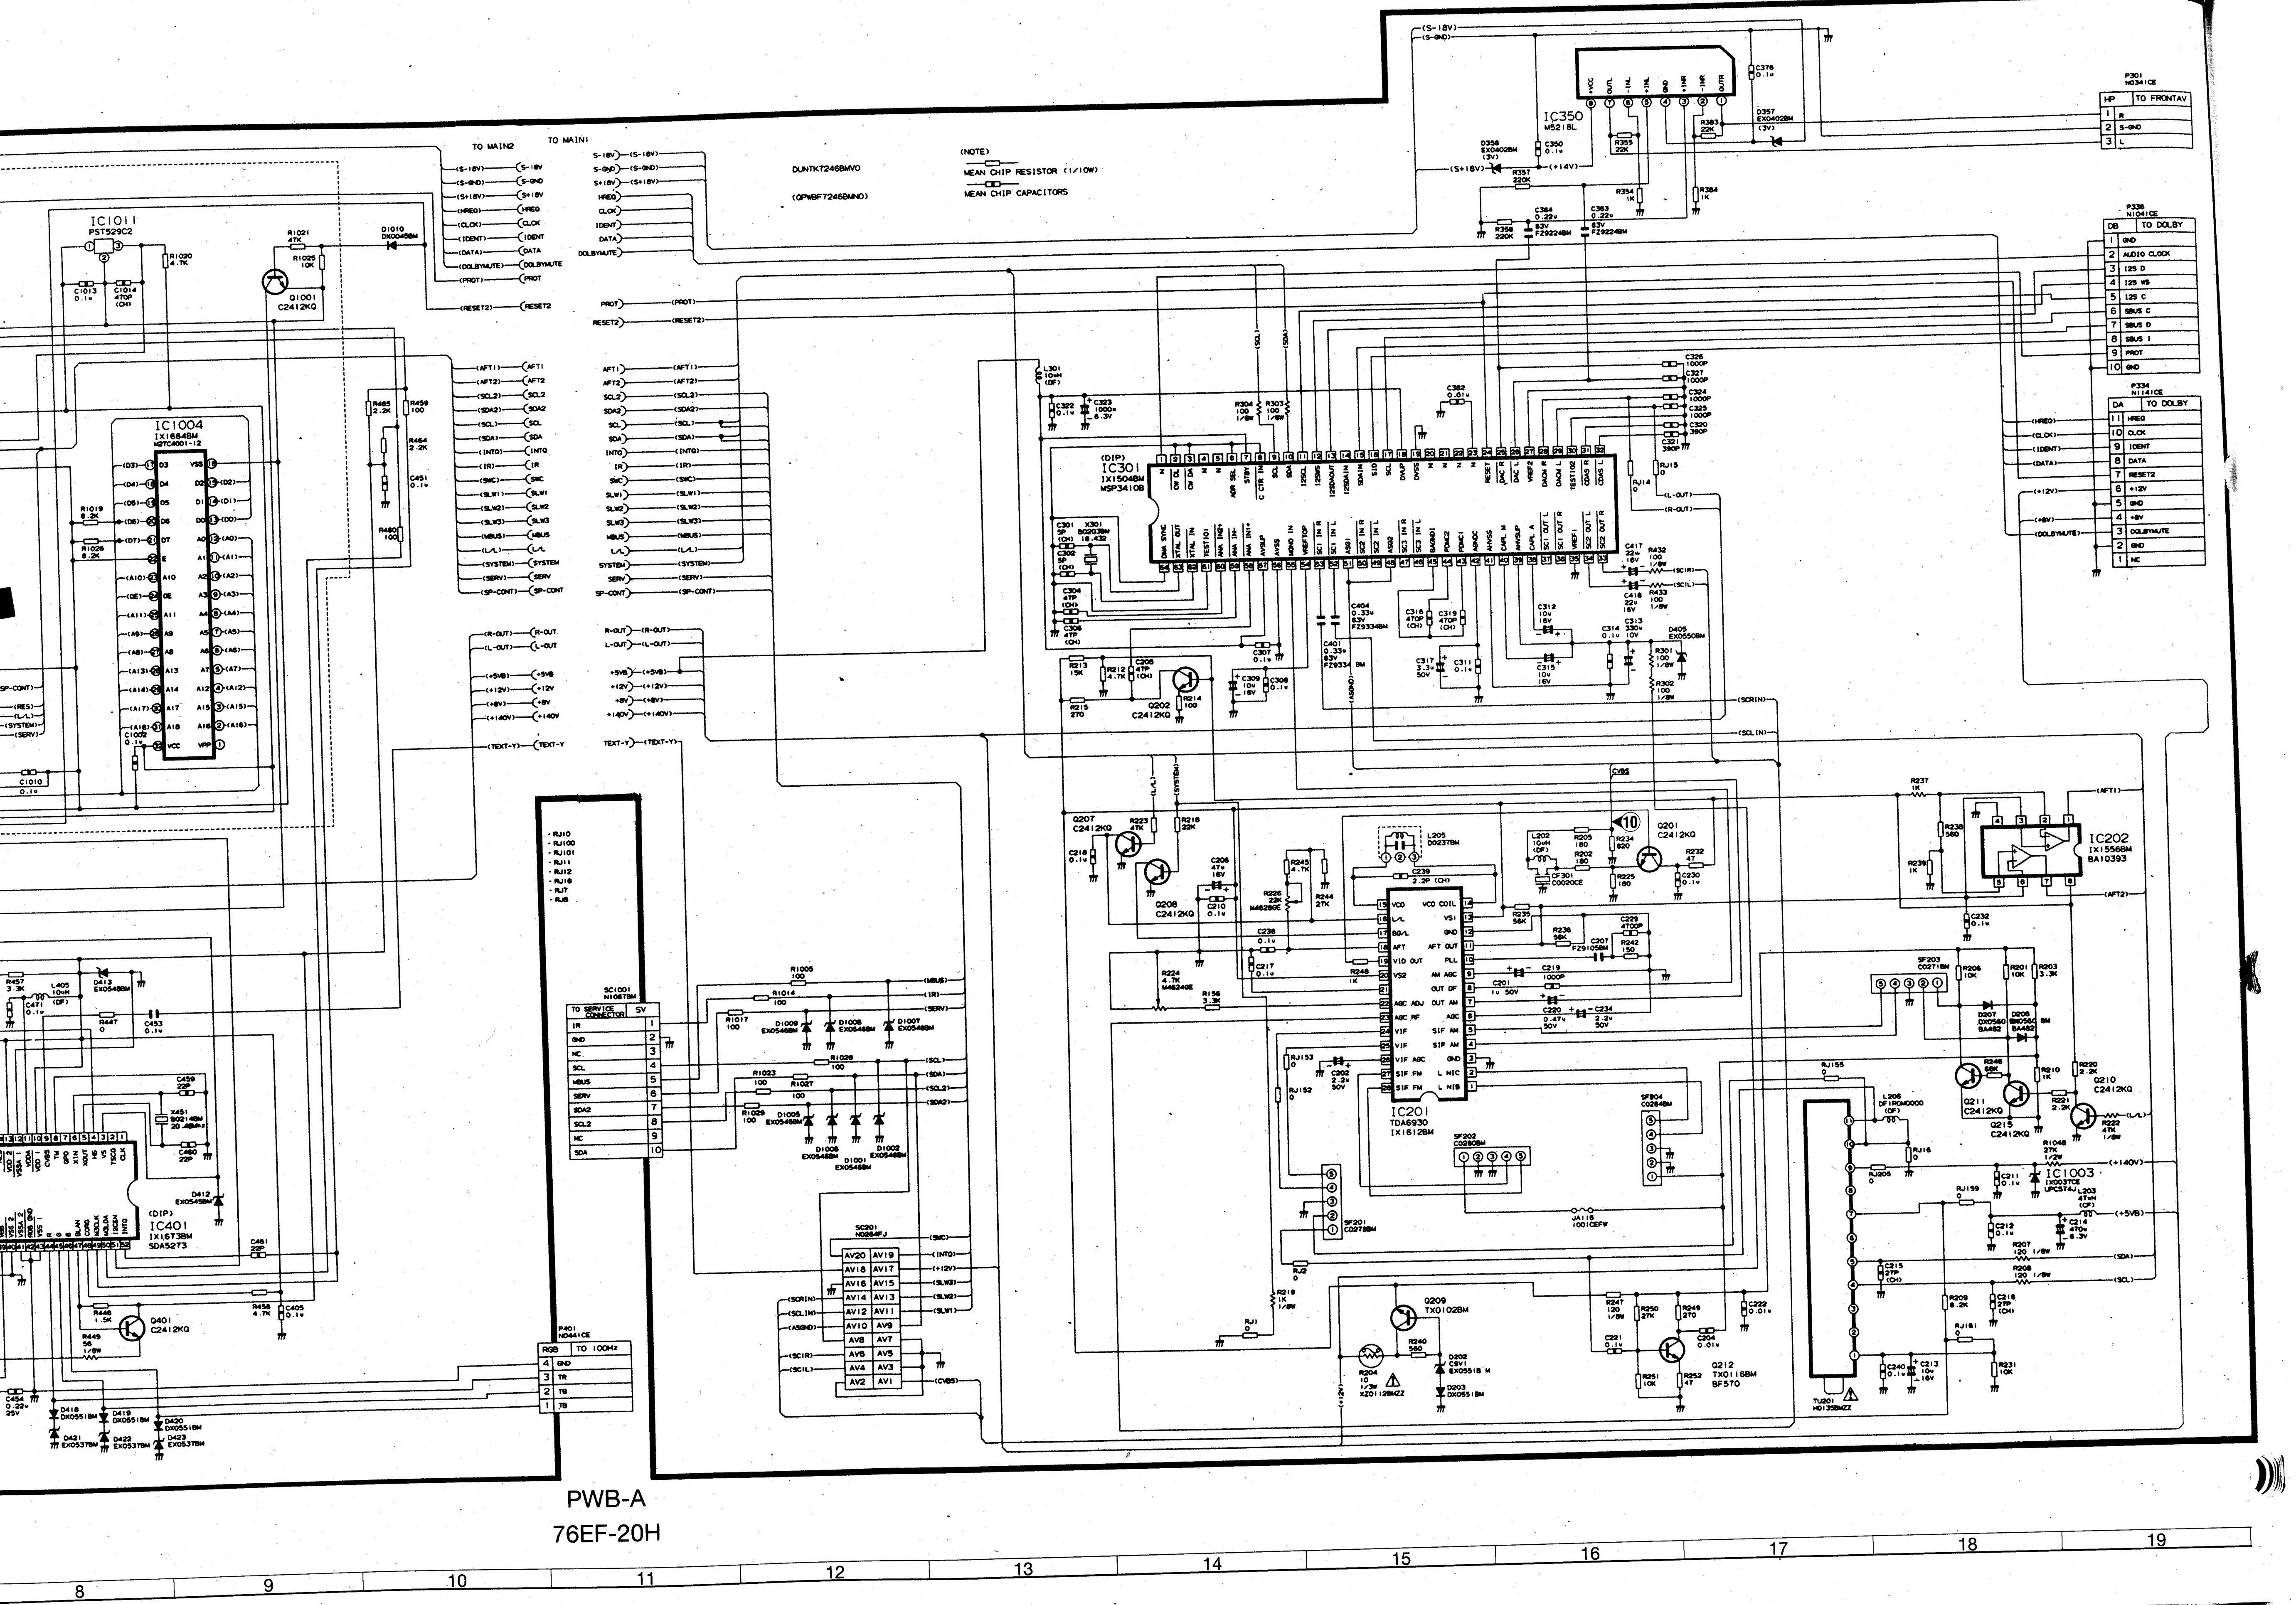

PWB-A

76EF-20H

IC1011
PST529C2
IC1004
IX1664BM
IC301
IX1504BM
MSP3410B
IC350
M5218L
IC201
TDA6930
IX1612BM
IC202
IX1556BM
BA10393
IC401
IX1673BM
SDA5273
IC1003
IX0037CE
UPC574J
TO MAIN2
TO MAIN1
DUNTK7246BMV0
(QPWBF7246BMN0)
(NOTE)
MEAN CHIP RESISTOR (1/10W)
MEAN CHIP CAPACITORS
P301
TO FRONTAV
P336
TO DOLBY
P334
TO DOLBY
SC1001
TO SERVICE CONNECTOR
SC201
P401
TO 100Hz
TU201
Q1001
C2412KQ
Q202
C2412KQ
Q207
C2412KQ
Q208
C2412KQ
Q201
C2412KQ
Q209
TX0102BM
Q212
TX0116BM
BF570
Q210
C2412KQ
Q211
C2412KQ
Q215
C2412KQ
Q401
C2412KQ
X301
X451
SF201
SF202
SF203
SF204
8
9
10
11
12
13
14
15
16
17
18
19

SCHEMATIC DIAGRAM POWER UNIT 76EF-20H

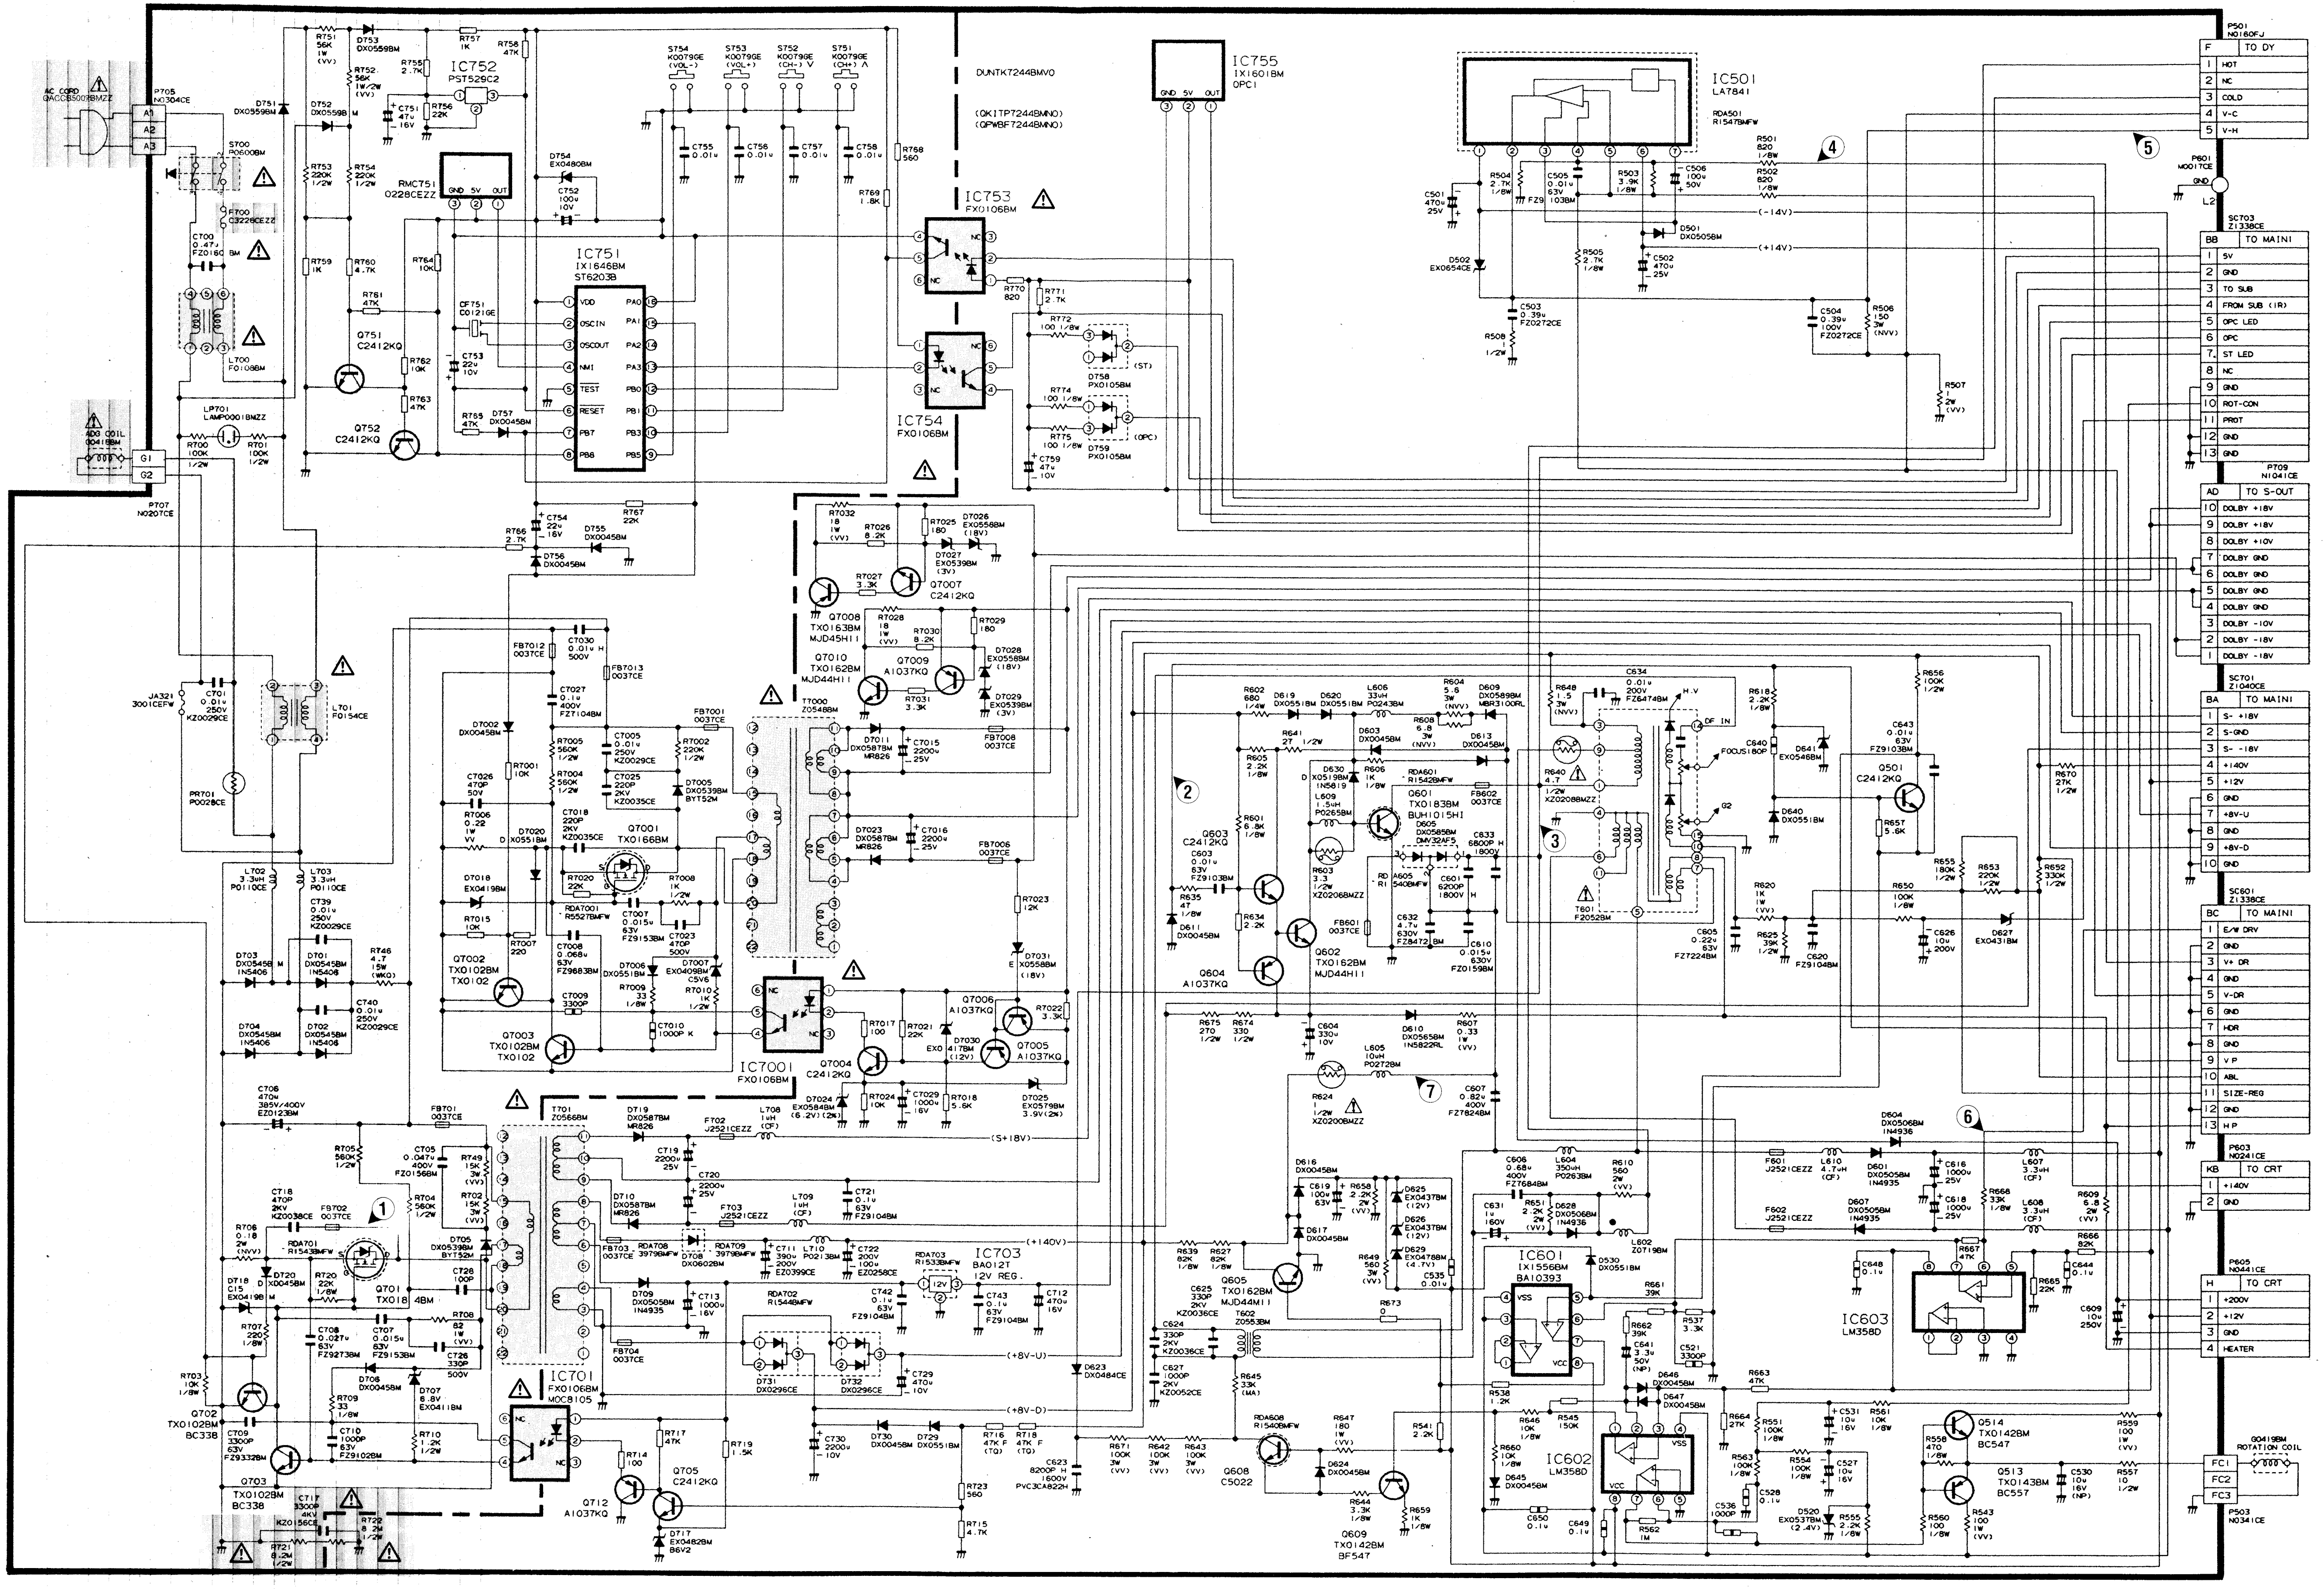
AC CORD QACCB5008MZZ
P705 NO304CE
A1
A2
A3
S700 PO600BM
F700 Q3226CEZZ
C700 0.47μ FZ0160BM
L700 FO108BM
LP701 LAMP0001BMZZ
ADD COIL 0041BBM
R700 100K 1/2W
R701 100K 1/2W
G1
G2
P707 NO207CE
JA321 3001CEFW
C701 0.01μ 250V KZ0029CE
L701 FO154CE
PR701 PO02BCE
L702 3.3μH PO110CE
L703 3.3μH PO110CE
C739 0.01μ 250V KZ0029CE
R746 4.7 15W (WKO)
D703 DX0545BM 1N5406
D701 DX0545BM 1N5406
D704 DX0545BM 1N5406
D702 DX0545BM 1N5406
C740 0.01μ 250V KZ0029CE
C706 470μ 385V/400V EZ0123BM
FB701 0037CE
R751 56K 1W (VV)
D753 DX0559BM
D751 DX0559BM
D752 DX0559BM
R752 56K 1W/2W (VV)
R755 2.7K
R757 1K
R758 47K
IC752 PST529C2
C751 47μ 16V
R756 22K
R753 220K 1/2W
R754 220K 1/2W
RMC751 0228CEZZ
GND 5V OUT
R759 1K
R760 4.7K
R761 47K
R764 10K
Q751 C2412KQ
R762 10K
R763 47K
Q752 C2412KQ
CF751 CO121GE
C753 22μ 10V
R765 47K
D757 DX0045BM
IC751 IX1646BM ST6203B
VDD
OSCIN
OSCOUT
NMI
TEST
RESET
PB7
PB8
PA0
PA1
PA2
PA3
PB0
PB1
PB3
PB5
D754 EX0480BM
C752 100μ 10V
S754 KO079GE (VOL-)
S753 KO079GE (VOL+)
S752 KO079GE (CH-) V
S751 KO079GE (CH+) Λ
C755 0.01μ
C756 0.01μ
C757 0.01μ
C758 0.01μ
R768 560
R769 1.8K
C754 22μ 16V
R766 2.7K
D755 DX0045BM
R767 22K
D756 DX0045BM
DUNTKT244BMV0
(QKITPT244BMNO)
(QPWBF7244BMNO)
IC753 FX0106BM
IC754 FX0106BM
R770 820
R771 2.7K
R772 100 1/8W
R774 100 1/8W
R775 100 1/8W
D758 PX0105BM (ST)
D759 PX0105BM (OPC)
C759 47μ 10V
IC755 IX1601BM OPC1
GND 5V OUT
IC501 LA7841
RD4501 R1547BMFW
R501 820 1/8W
R502 820 1/8W
C501 470μ 25V
R504 2.7K 1/8W
C505 0.01μ 63V FZ9103BM
R503 3.9K 1/8W
C506 100μ 50V
D501 DX0505BM
D502 EX0654CE
R505 2.7K 1/8W
C502 470μ 25V
C503 0.39μ FZ0272CE
R508 1 1/2W
C504 0.39μ 100V FZ0272CE
R506 150 3W (NVV)
R507 2W (VV)
(-14V)
(+14V)
P501 NO160FJ
F TO DY
1 HOT
2 NC
3 COLD
4 V-C
5 V-H
P601 M0017CE
GND
L2
SC703 Z1338CE
BB TO MAIN1
1 5V
2 GND
3 TO SUB
4 FROM SUB (IR)
5 OPC LED
6 OPC
7 ST LED
8 NC
9 GND
10 ROT-CON
11 PROT
12 GND
13 GND
P709 N1041CE
AD TO S-OUT
10 DOLBY +18V
9 DOLBY +18V
8 DOLBY +10V
7 DOLBY GND
6 DOLBY GND
5 DOLBY GND
4 DOLBY GND
3 DOLBY -10V
2 DOLBY -18V
1 DOLBY -18V
SC701 Z1040CE
BA TO MAIN1
1 S- +18V
2 S-GND
3 S- -18V
4 +140V
5 +12V
6 GND
7 +8V-U
8 GND
9 +8V-D
10 GND
SC601 Z1338CE
BC TO MAIN1
1 E/W DRV
2 GND
3 V+ DR
4 GND
5 V-DR
6 GND
7 HDR
8 GND
9 VP
10 ABL
11 SIZE-REG
12 GND
13 HP
P603 NO241CE
KB TO CRT
1 +140V
2 GND
P605 NO441CE
H TO CRT
1 +200V
2 +12V
3 GND
4 HEATER
FC1
FC2
FC3
P503 NO341CE
0041BBM ROTATION COIL
Q7008 TX0163BM MJD45H11
Q7007 C2412KQ
Q7010 TX0162BM MJD44H11
Q7009 A1037KQ
T7000 Z0548BM
Q7001 TX0166BM
Q7002 TX0102BM TX0102
Q7003 TX0102BM TX0102
IC7001 FX0106BM
Q7004 C2412KQ
Q7006 A1037KQ
Q7005 A1037KQ
T701 Z0566BM
IC701 FX0106BM MOC8105
Q701 TX0184BM
Q702 TX0102BM BC338
Q703 TX0102BM BC338
Q705 C2412KQ
Q712 A1037KQ
IC703 BA012T 12V REG.
(S+18V)
(+140V)
(+8V-U)
(+8V-D)
Q601 TX0183BM BUH1015HI
Q603 C2412KQ
Q604 A1037KQ
Q602 TX0162BM MJD44H11
T601 F2052BM
H.V
DF IN
FOCUS180P
G2
Q501 C2412KQ
IC601 IX1556BM BA10393
Q605 TX0162BM MJD44H11
T602 Z0553BM
Q608 C5022
Q609 TX0142BM BF547
IC602 LM358D
IC603 LM358D
Q514 TX0142BM BC547
Q513 TX0143BM BC557
①
②
③
④
⑤
⑥
⑦

PWB-B 76EF-20H

CONNECTION DIAGRAM

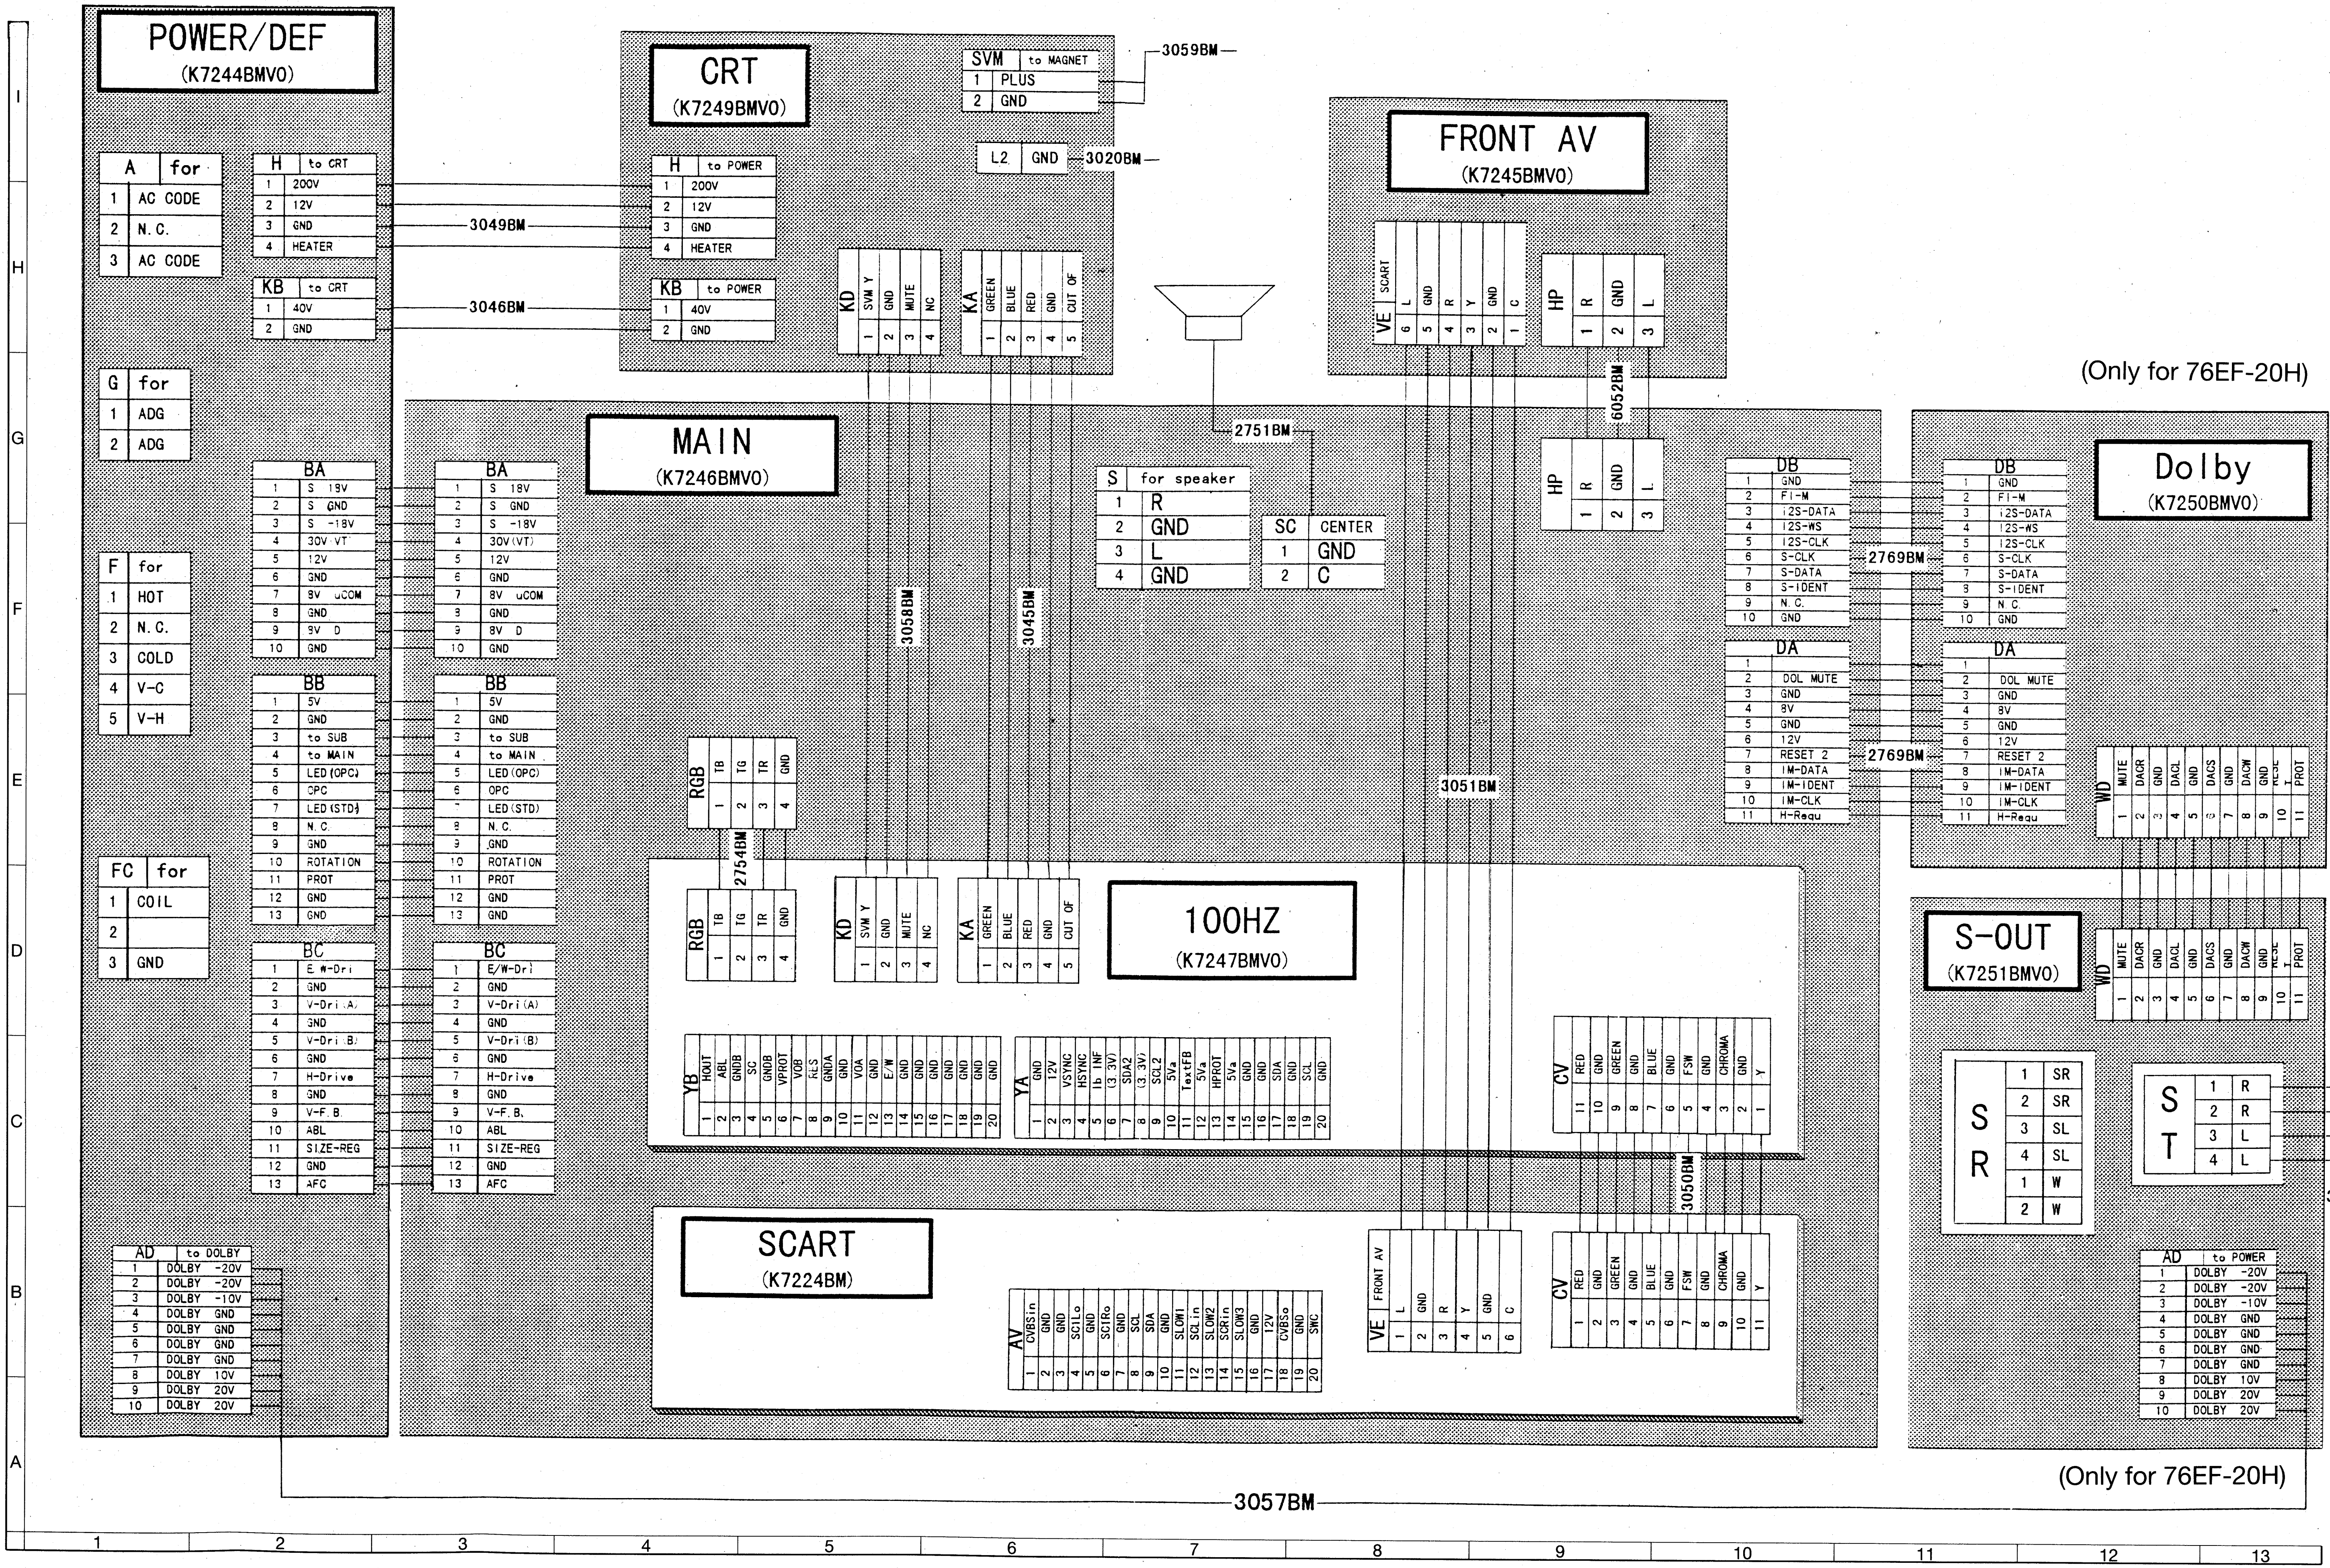
POWER/DEF
(K7244BMV0)
A for
1 AC CODE
2 N.C.
3 AC CODE
H to CRT
1 200V
2 12V
3 GND
4 HEATER
KB to CRT
1 40V
2 GND
G for
1 ADG
2 ADG
F for
1 HOT
2 N.C.
3 COLD
4 V-C
5 V-H
FC for
1 COIL
2
3 GND
BA
1 S 19V
2 S GND
3 S -18V
4 30V VT
5 12V
6 GND
7 8V uCOM
8 GND
9 8V D
10 GND
BB
1 5V
2 GND
3 to SUB
4 to MAIN
5 LED (OPC)
6 OPC
7 LED (STD)
8 N.C.
9 GND
10 ROTATION
11 PROT
12 GND
13 GND
BC
1 E/W-Dri
2 GND
3 V-Dri (A)
4 GND
5 V-Dri (B)
6 GND
7 H-Drive
8 GND
9 V-F.B.
10 ABL
11 SIZE-REG
12 GND
13 AFC
AD to DOLBY
1 DOLBY -20V
2 DOLBY -20V
3 DOLBY -10V
4 DOLBY GND
5 DOLBY GND
6 DOLBY GND
7 DOLBY GND
8 DOLBY 10V
9 DOLBY 20V
10 DOLBY 20V
3049BM
3046BM
CRT
(K7249BMV0)
SVM to MAGNET
1 PLUS
2 GND
3059BM
L2 GND
3020BM
H to POWER
1 200V
2 12V
3 GND
4 HEATER
KB to POWER
1 40V
2 GND
KD SVM Y GND MUTE NC
KA GREEN BLUE RED GND CUT OF
FRONT AV
(K7245BMV0)
VE SCART L GND R Y GND C
HP R GND L
6052BM
2751BM
MAIN
(K7246BMV0)
S for speaker
1 R
2 GND
3 L
4 GND
SC CENTER
1 GND
2 C
3058BM
3045BM
3051BM
RGB TB TG TR GND
2754BM
100HZ
(K7247BMV0)
YB HOUT ABL GNDB SC GNDB VPROT VDB RLS GNDA VDA GND E/W GND GND GND GND GND GND GND
YA GND 12V VSYNC HSYNC Ib INF (3.3V) SDA2 (3.3V) SCL2 5Va TextFB 5Va HPROT 5Va GND SDA GND SCL GND
CV RED GND GREEN GND BLUE GND FSW GND CHROMA GND Y
3050BM
SCART
(K7224BM)
AV CVBSin GND SCILo GND SCIRo GND SCL SDA GND SLOW1 SCLin SLOW2 SCRin SLOW3 GND 12V CVBSo GND SWC
VE FRONT AV L GND R Y GND C
DB
1 GND
2 FI-M
3 I2S-DATA
4 I2S-WS
5 I2S-CLK
6 S-CLK
7 S-DATA
8 S-IDENT
9 N.C.
10 GND
2769BM
DA
1
2 DOL MUTE
3 GND
4 8V
5 GND
6 12V
7 RESET 2
8 IM-DATA
9 IM-IDENT
10 IM-CLK
11 H-Requ
2769BM
Dolby
(K7250BMV0)
WD MUTE DACR GND DACL GND DACS GND DACW GND RESET PROT
S-OUT
(K7251BMV0)
SR
1 SR
2 SR
3 SL
4 SL
1 W
2 W
ST
1 R
2 R
3 L
4 L
3060BM
AD to POWER
1 DOLBY -20V
2 DOLBY -20V
3 DOLBY -10V
4 DOLBY GND
5 DOLBY GND
6 DOLBY GND
7 DOLBY GND
8 DOLBY 10V
9 DOLBY 20V
10 DOLBY 20V
3057BM
I H G F E D C B A
1 2 3 4 5 6 7 8 9 10 11 12 13

(Only for 76EF-20H)

(Only for 76EF-20H)

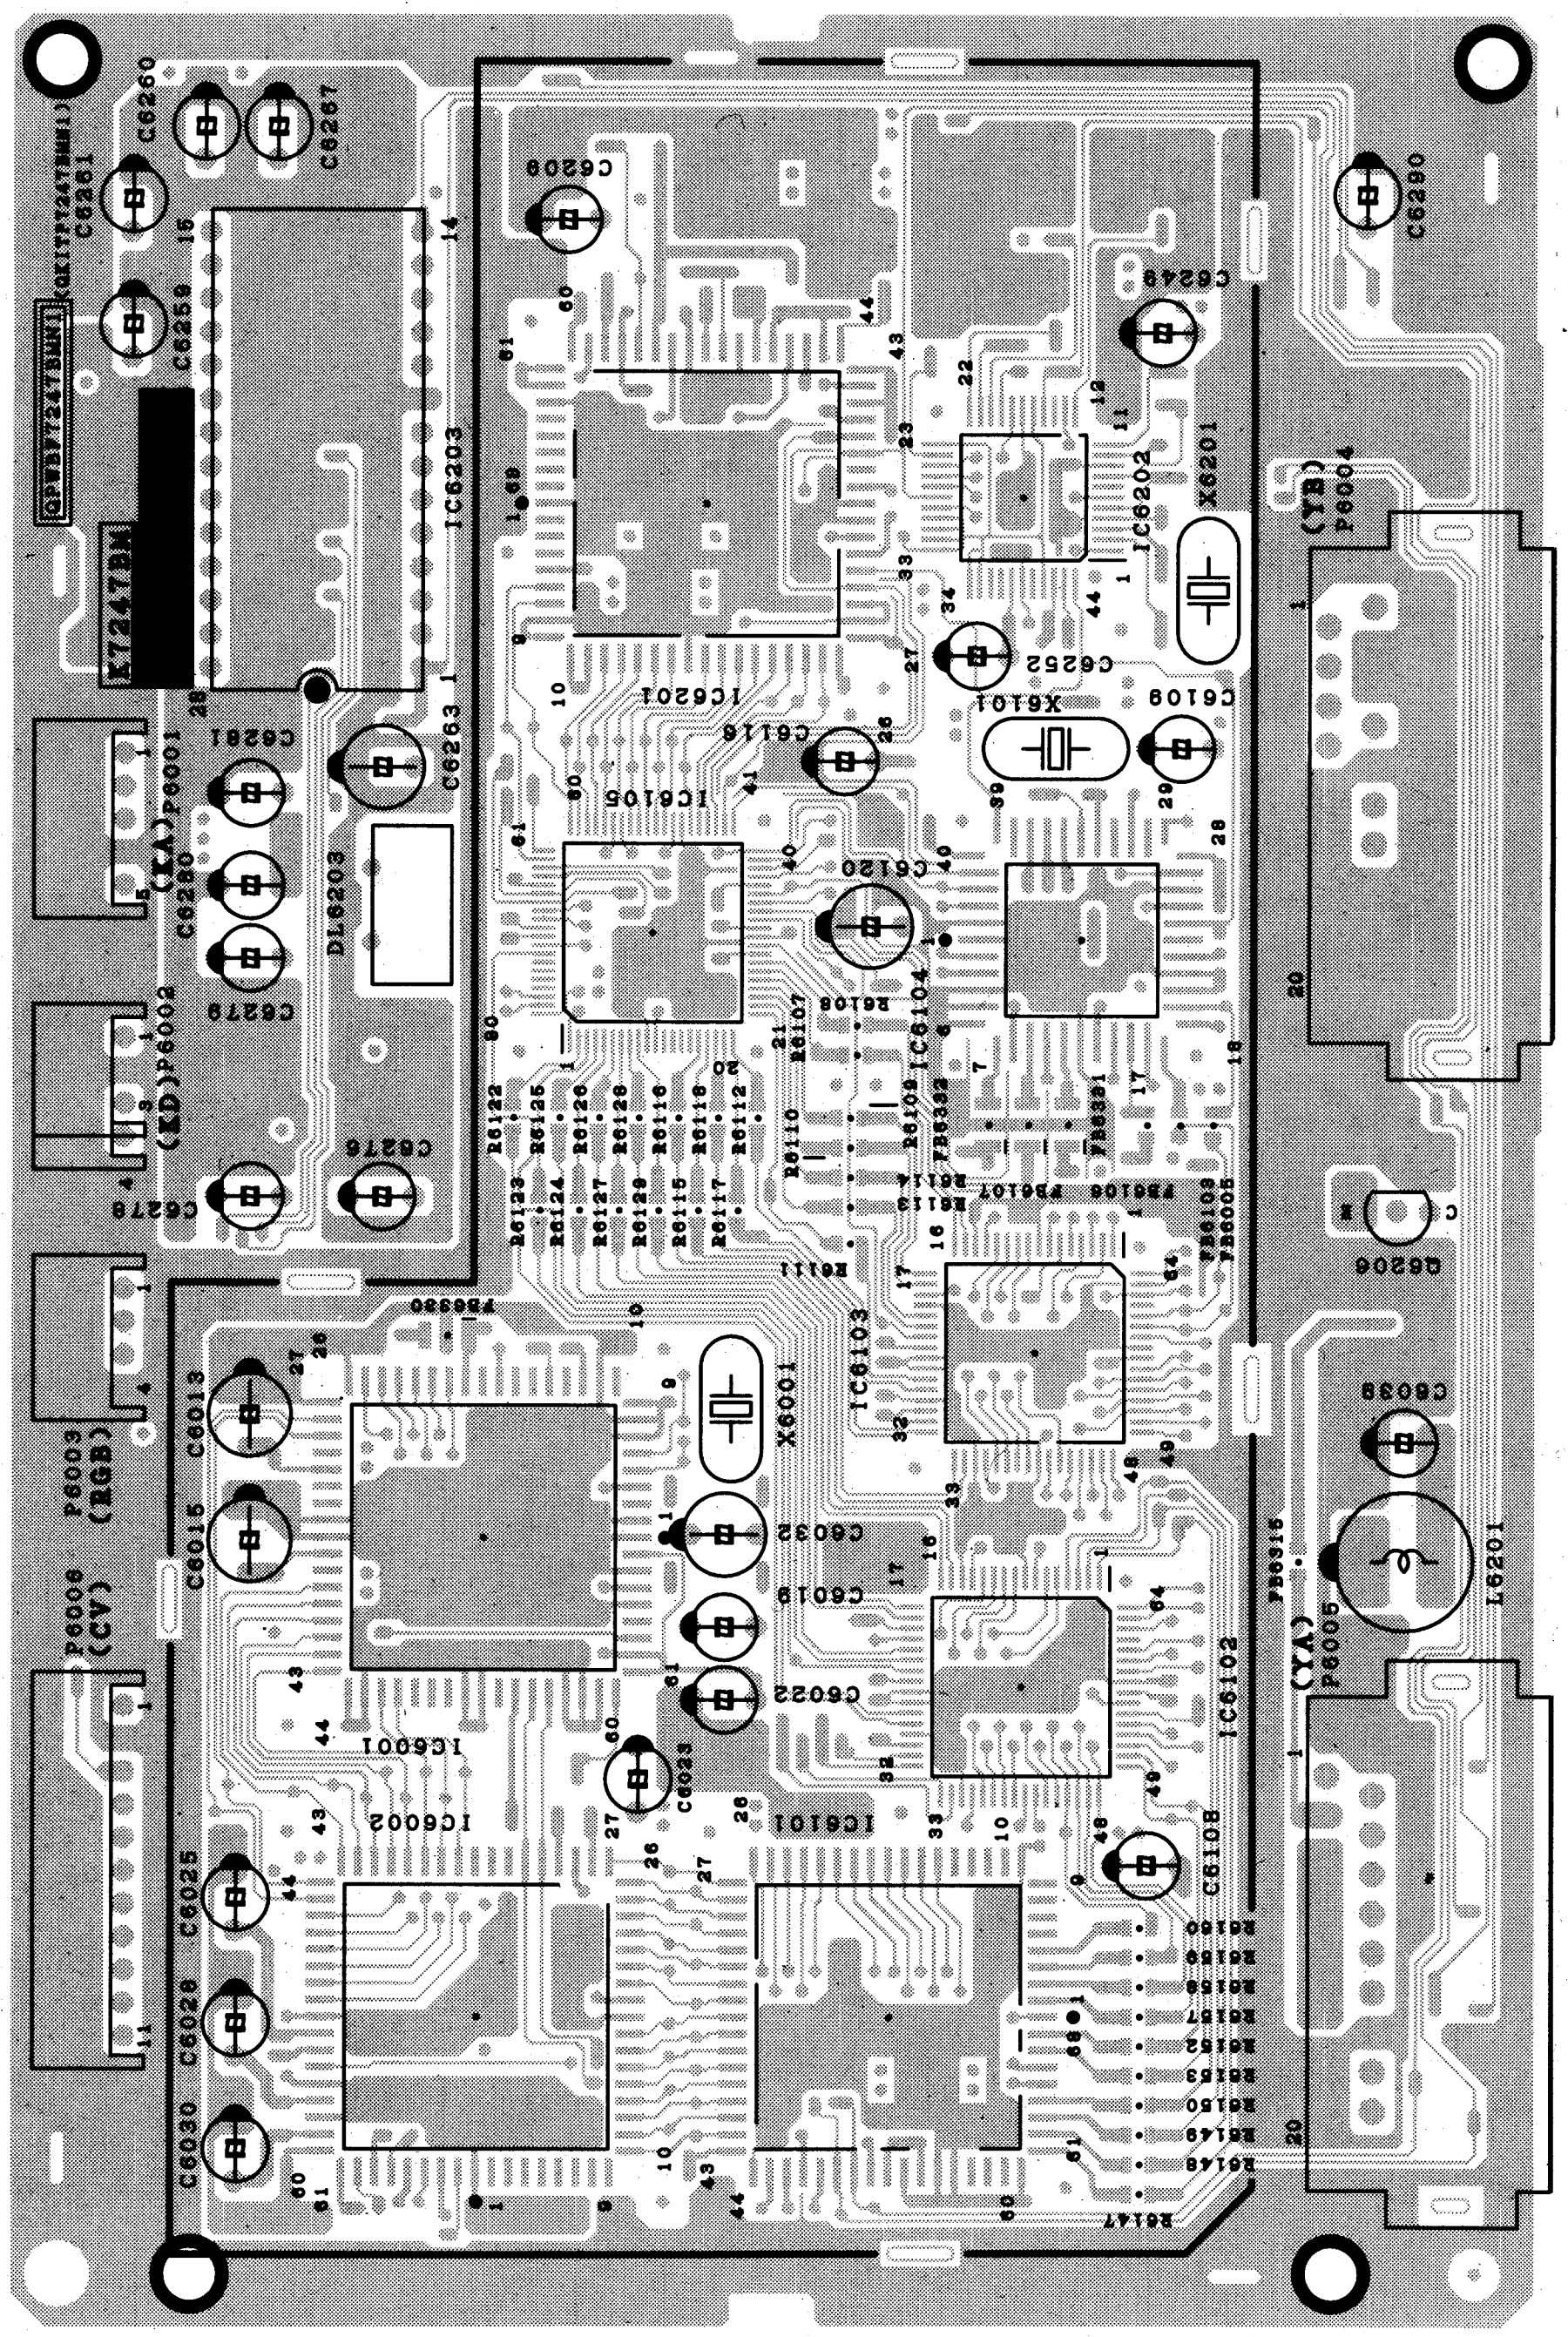
IC6203
IC6201
IC6202
IC6105
IC6103
IC6102
IC6101
IC6001
IC6002
DL6203
X6201
X6101
X6001
P6001 (KA)
P6002 (KD)
P6003 (RGB)
P6006 (CV)
P6004 (YB)
P6005 (YA)
L6201
KT247BM

1/2 PWB-D

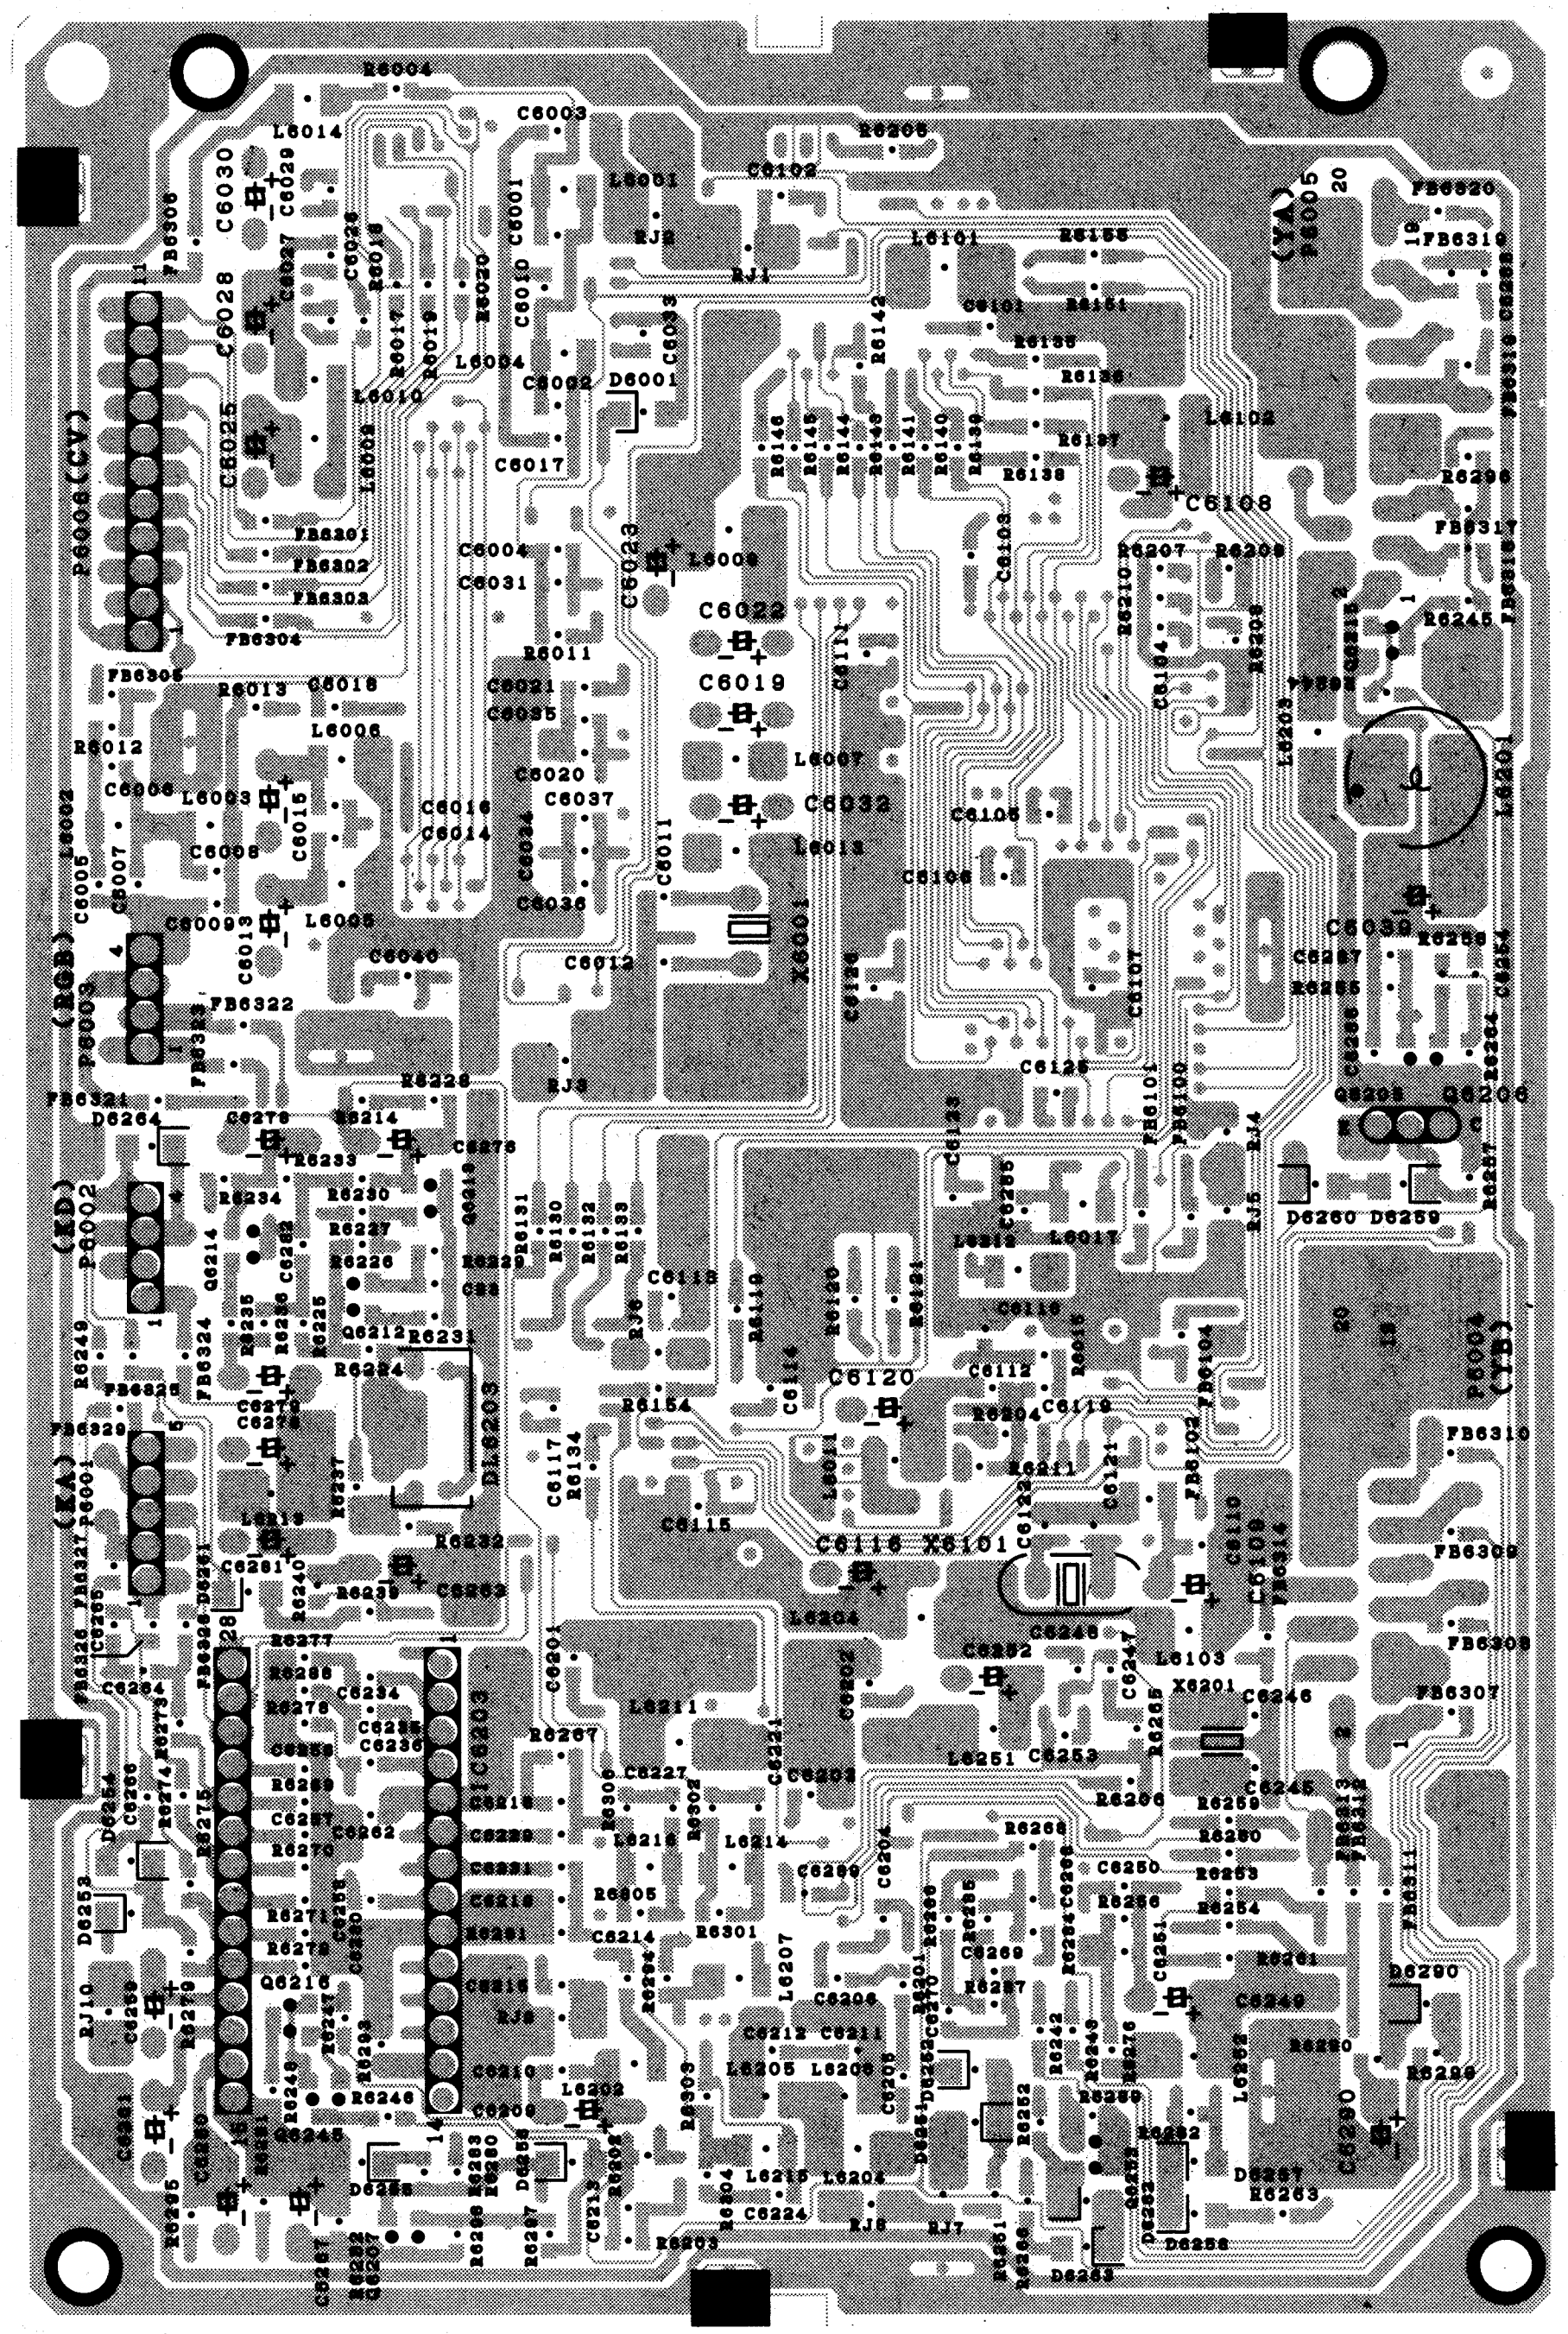
P6006 (CV)
P6003 (RGB)
P6002 (KD)
P6001 (KA)
P6004 (YB)
P6005 (YA)
IC6203
DL6203
X6001
X6101
X6201
L6201

1/2 PWB-D

PRINTED WIRING BOARDS

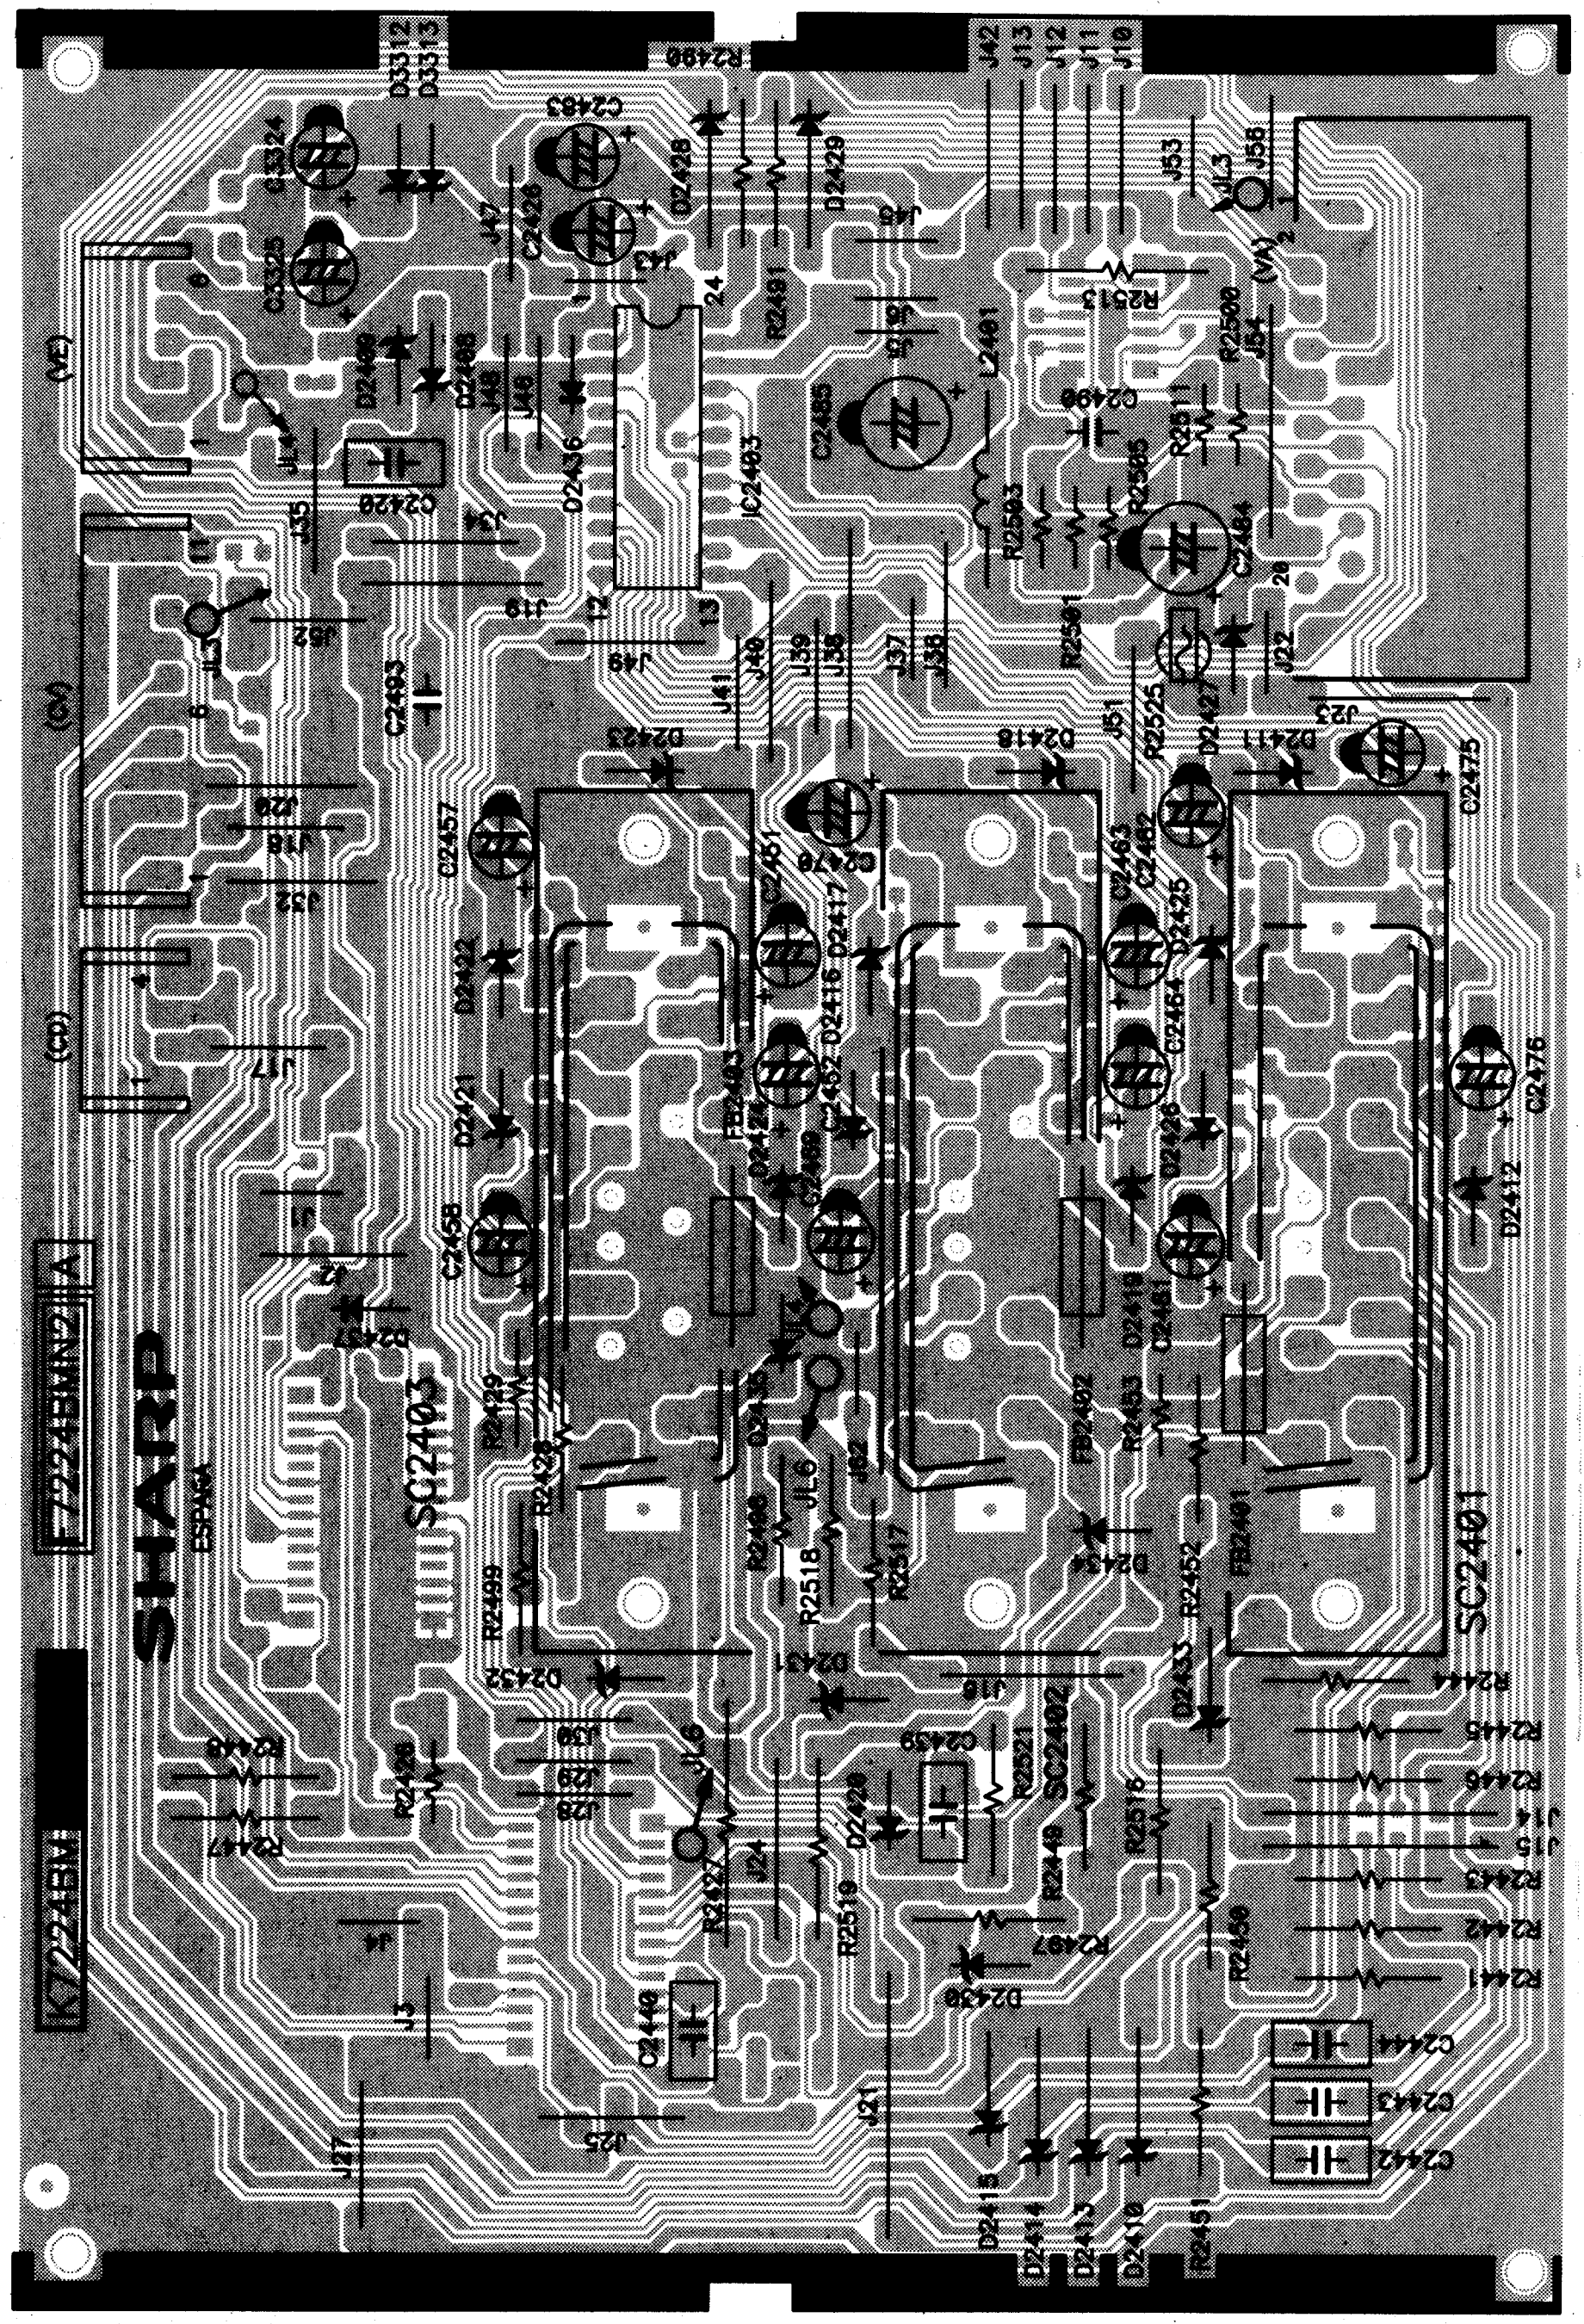
SHARP
ESPAÑA
KZ224BM
F7224BMN2 A
SC2401
SC2402
SC2403
IC2403
(CD)
(CV)
(VE)
(VA)
L2401
FB2401
FB2402
FB2403
C2440
C2442
C2443
C2444
C2457
C2458
C2475
C2476
C2483
C2485
C3324
C3325
D2410
D2412
D2413
D2414
D2415
D2421
D2422
D2423
D2436
D3312
D3313
R2441
R2442
R2443
R2444
R2445
R2446
R2450
R2451
R2452
R2453
R2490
R2491
R2499
R2500
R2501
R2503
R2505
R2511
R2513
R2516
R2517
R2518
R2519
R2521
R2525
J10
J11
J12
J13
J42
J53
J58
1
2
3
4
5
6

1/2 PWB-E

PRINTED WIRING BOARDS

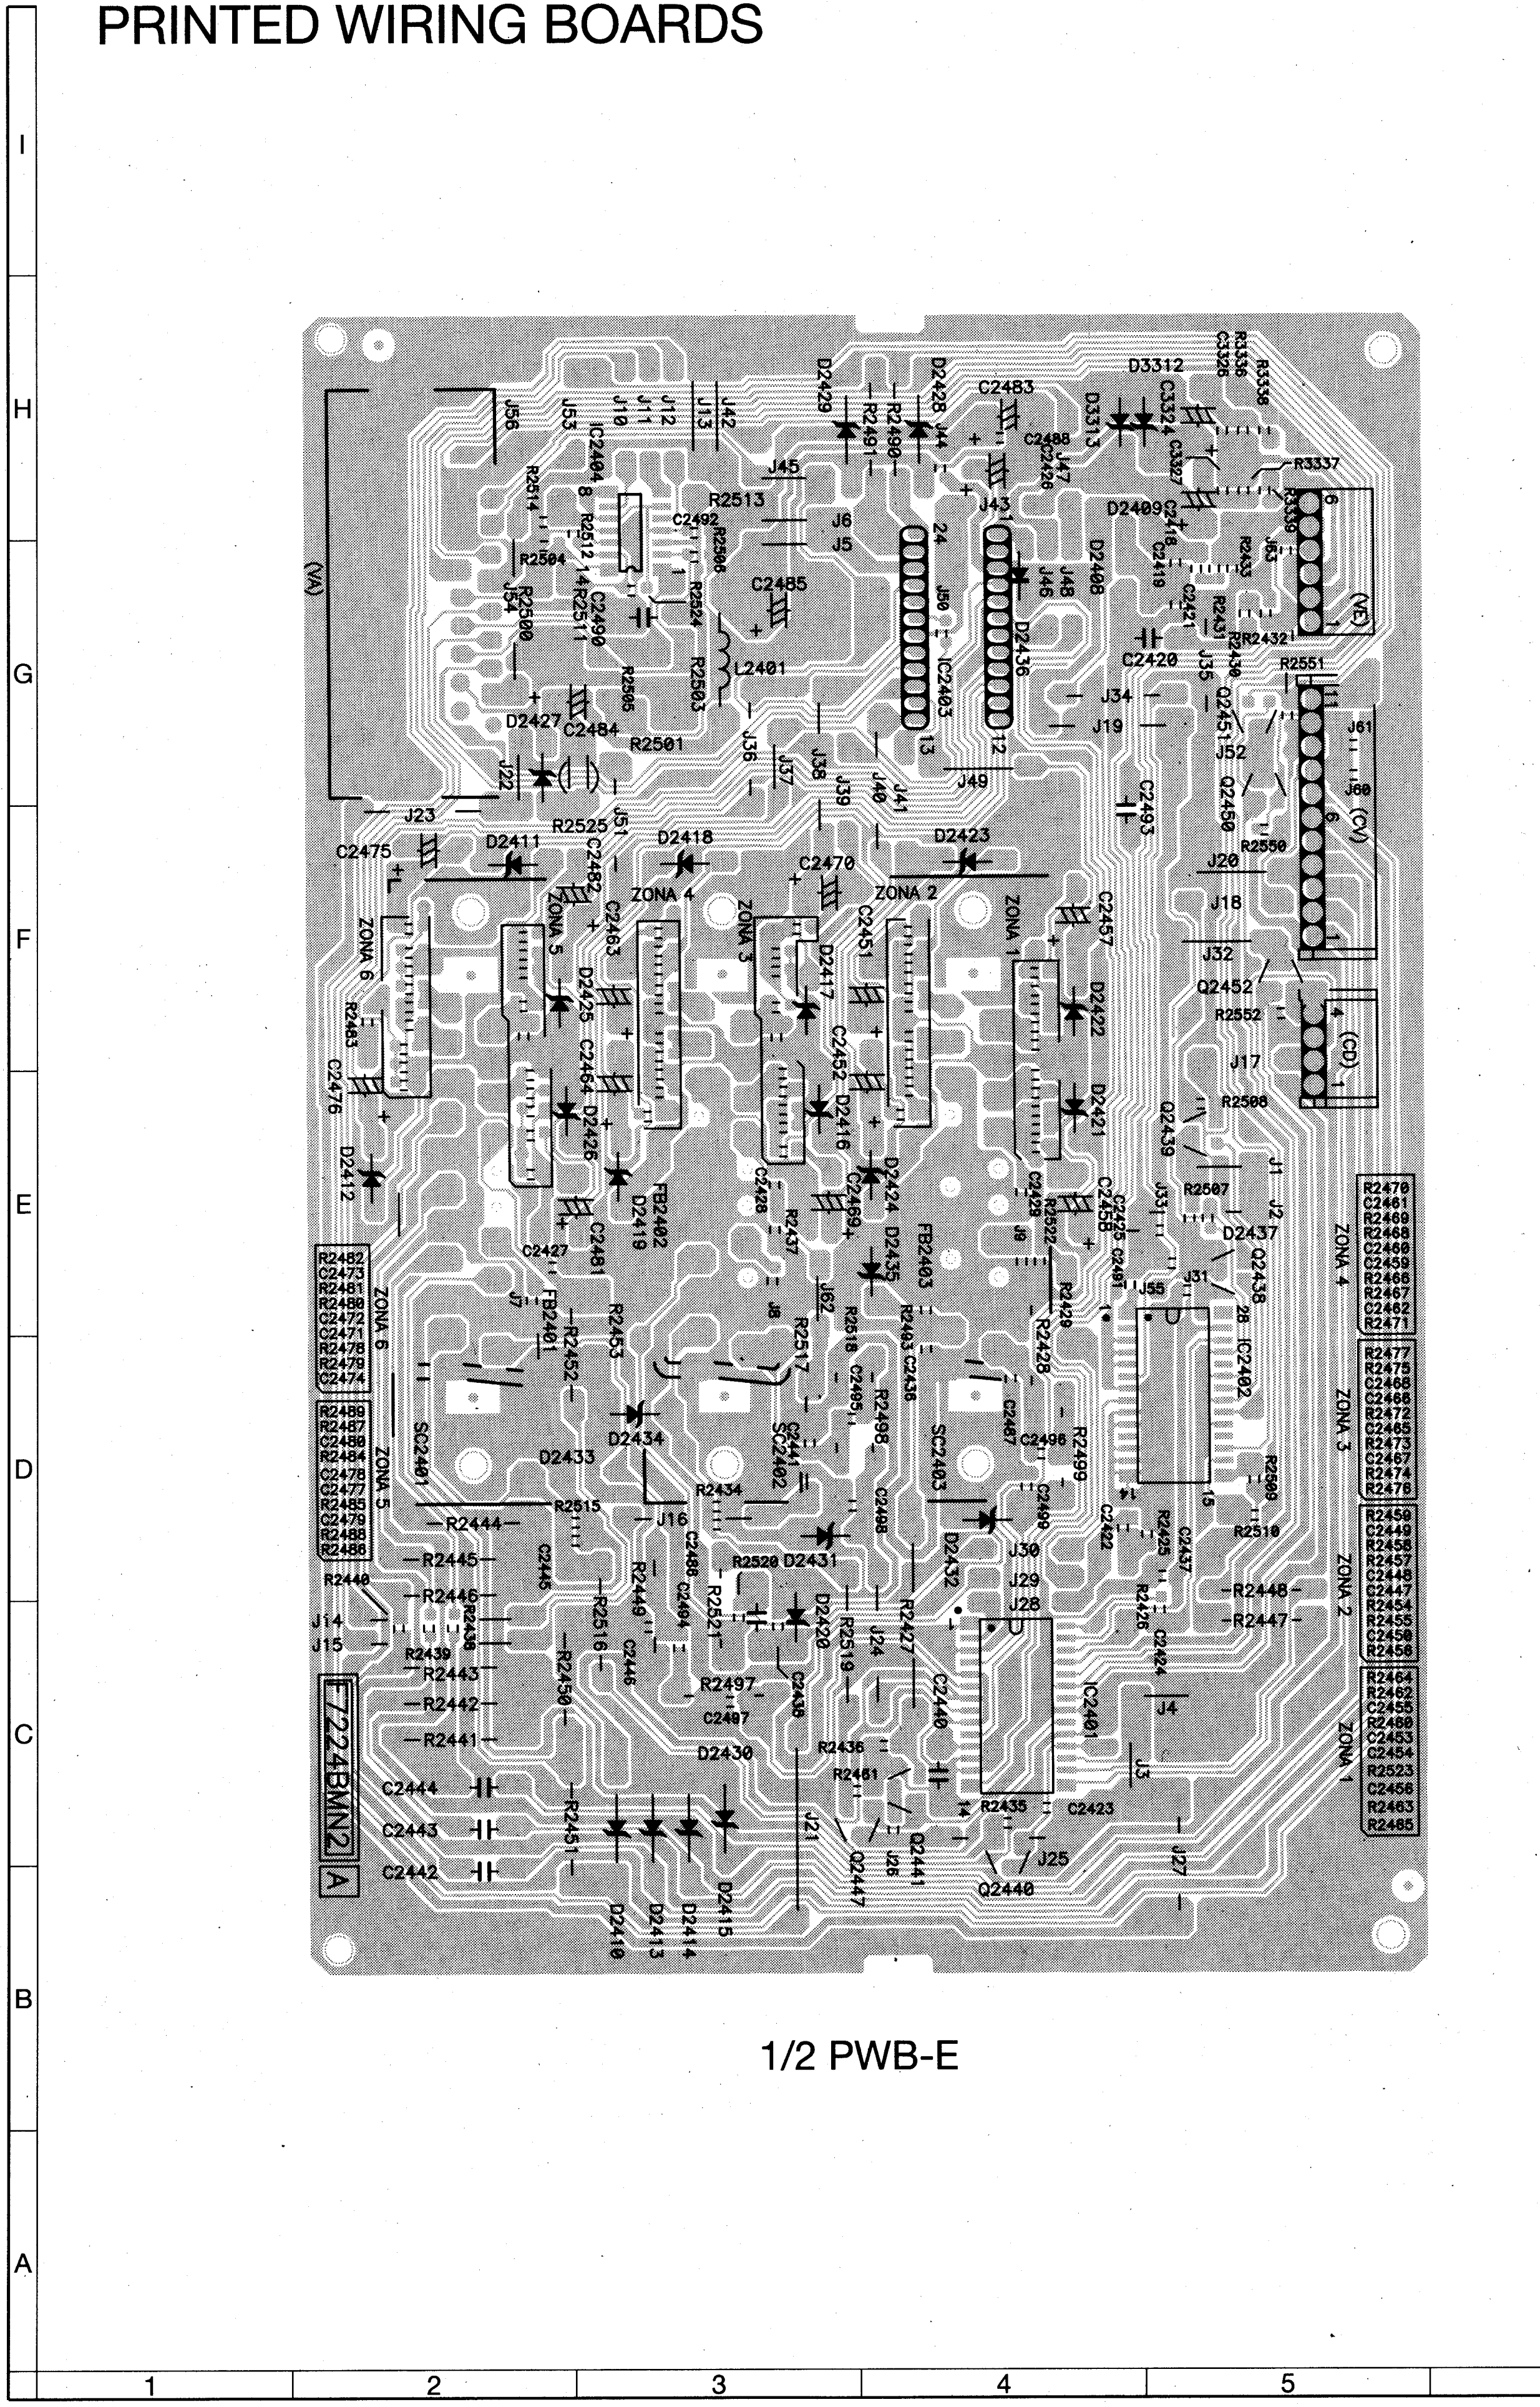
F7224BMN2 A
SC2401
SC2402
SC2403
IC2401
IC2402
IC2403
IC2404
(VA)
(VE)
(CV)
(CD)
ZONA 1
ZONA 2
ZONA 3
ZONA 4
ZONA 5
ZONA 6
L2401
FB2401
FB2402
FB2403
C2442
C2443
C2444
C2457
C2470
C2475
C2476
C2483
C2485
C2493
D2410
D2411
D2412
D2413
D2414
D2415
D2418
D2421
D2422
D2423
D2427
D2429
D2433
D2434
D2436
D3312
D3313
Q2439
Q2440
Q2441
Q2447
Q2450
Q2451
Q2452
R2441
R2442
R2443
R2444
R2445
R2446
R2447
R2448
R2451
R2499
R2501
R2503
R2513
R2525
R2551
R2552
R3336
R3337
J14
J15
J17
J18
J19
J20
J21
J23
J25
J27
J32
J34
J35
J56
J61
A
B
C
D
E
F
G
H
I
1
2
3
4
5

1/2 PWB-E

PRINTED WIRING BOARDS

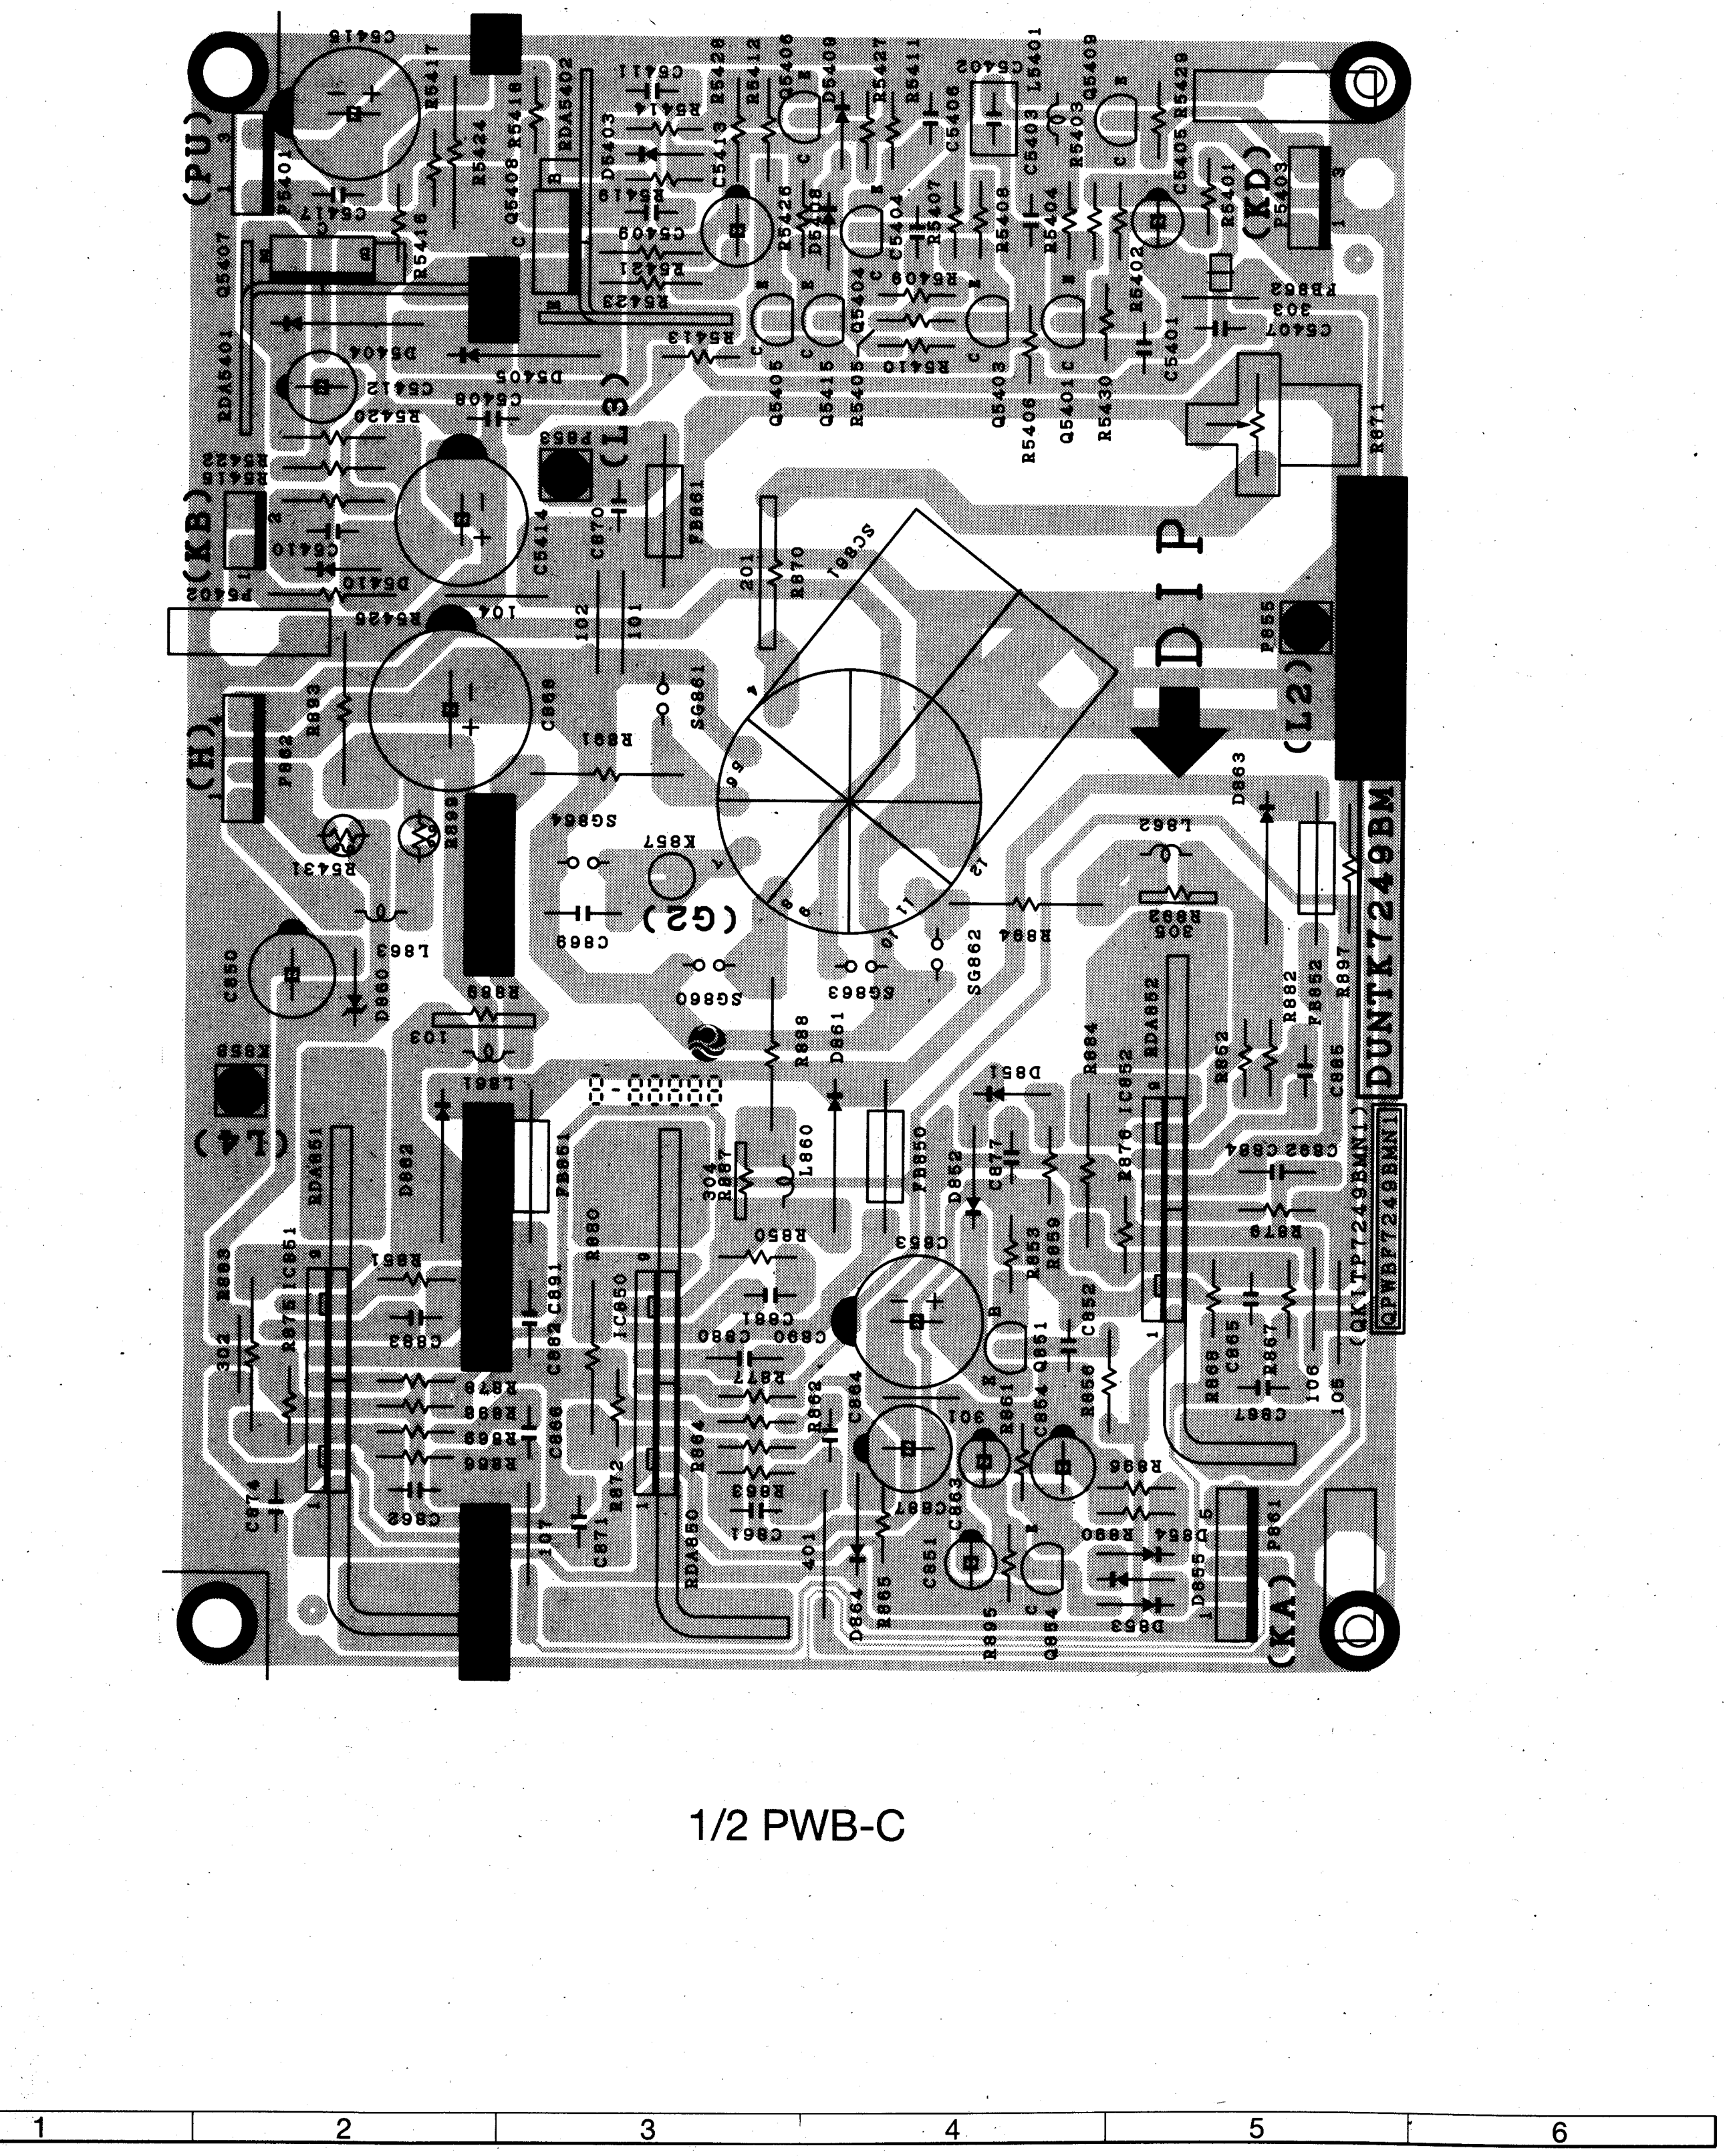
(PU)
(KB)
(H)
(L4)
(L3)
(L2)
(G2)
(KD)
(KA)
DIP
DUNTK7249BM
QPWBF7249BMN1
QK1TP7249BMN1
RDA5401
RDA5402
RDA851
RDA850
RDA852
IC851
IC850
IC852
SG861
SG862
SG863
SG864
SG860
FB861
FB851
FB850
FB852
P5401
P5402
P5403
P861
P862
P853
P855
K857
K858
1
2
3
4
5
6

1/2 PWB-C

PRINTED WIRING BOARDS

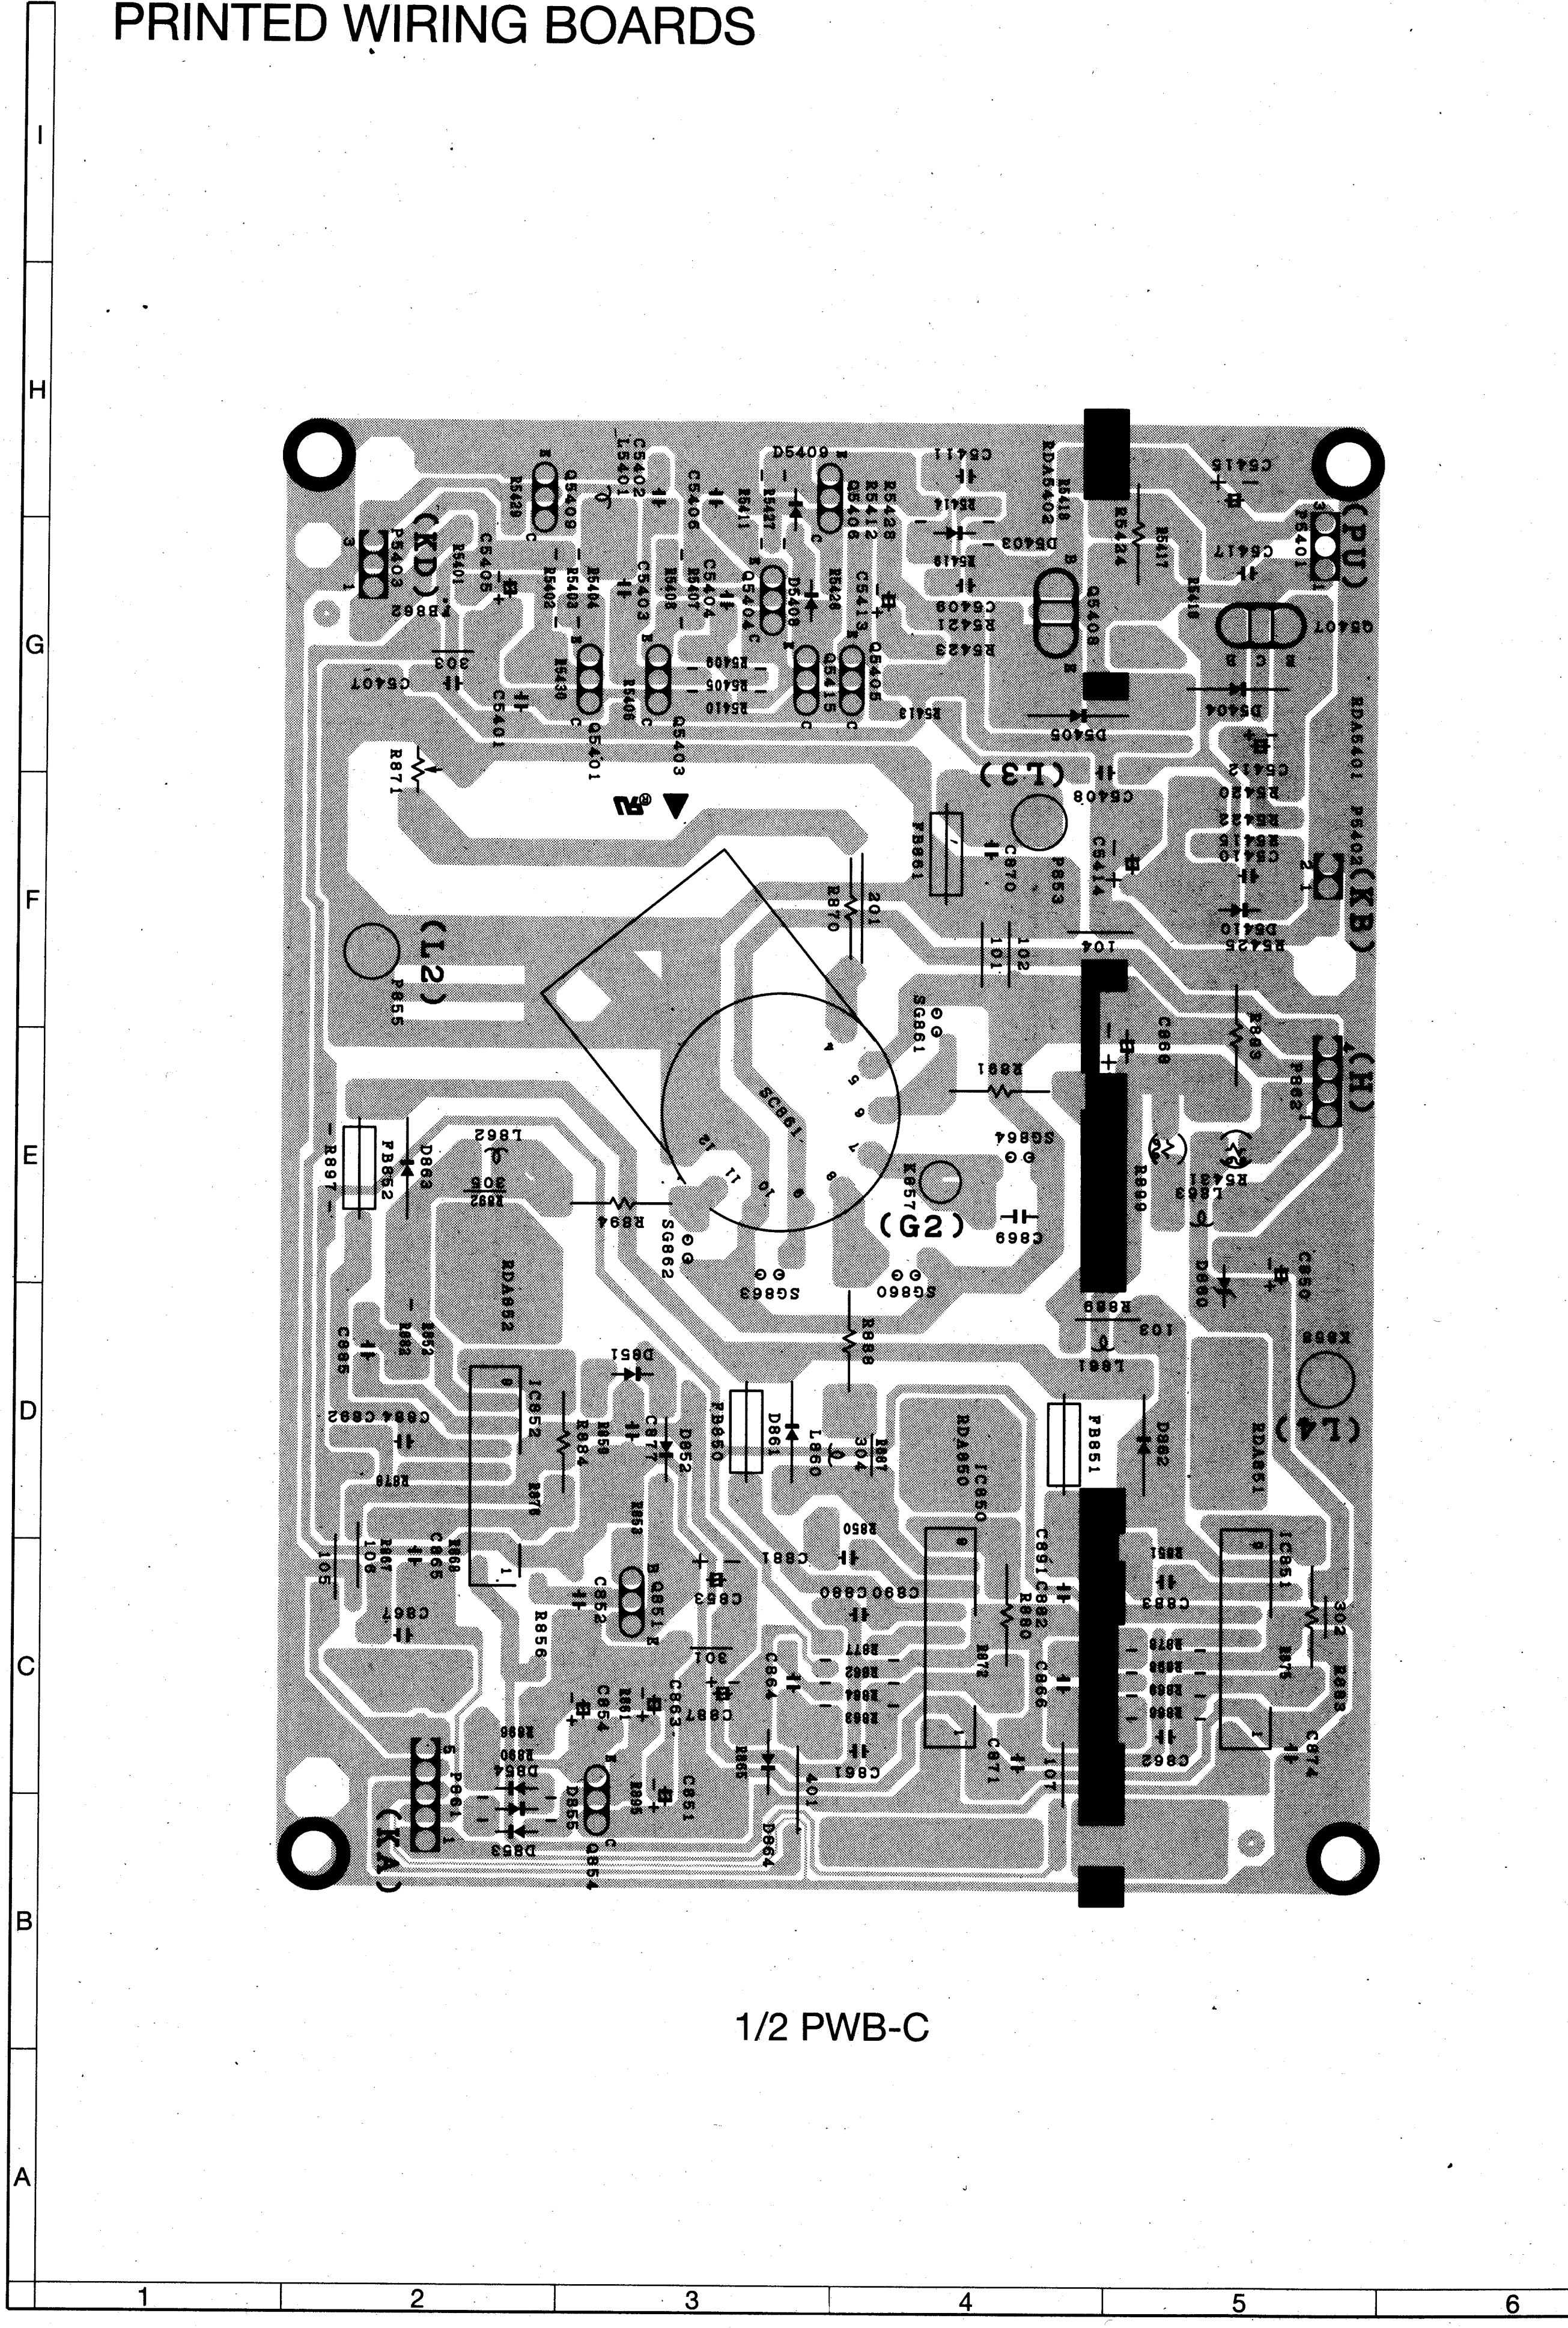
(PU)
(KB)
(H)
(L4)
(L3)
(L2)
(G2)
(KD)
(KA)
RDA5401
RDA5402
RDA851
RDA850
RDA852
IC851
IC850
IC852
SG861
SG862
SG863
SG864
SG860
FB861
FB851
FB850
FB852
P5401
P5402
P5403
P861
P862
P853
P855
K857
K858
I
H
G
F
E
D
C
B
A
1
2
3
4
5
6

1/2 PWB-C

PRINTED WIRING BOARDS

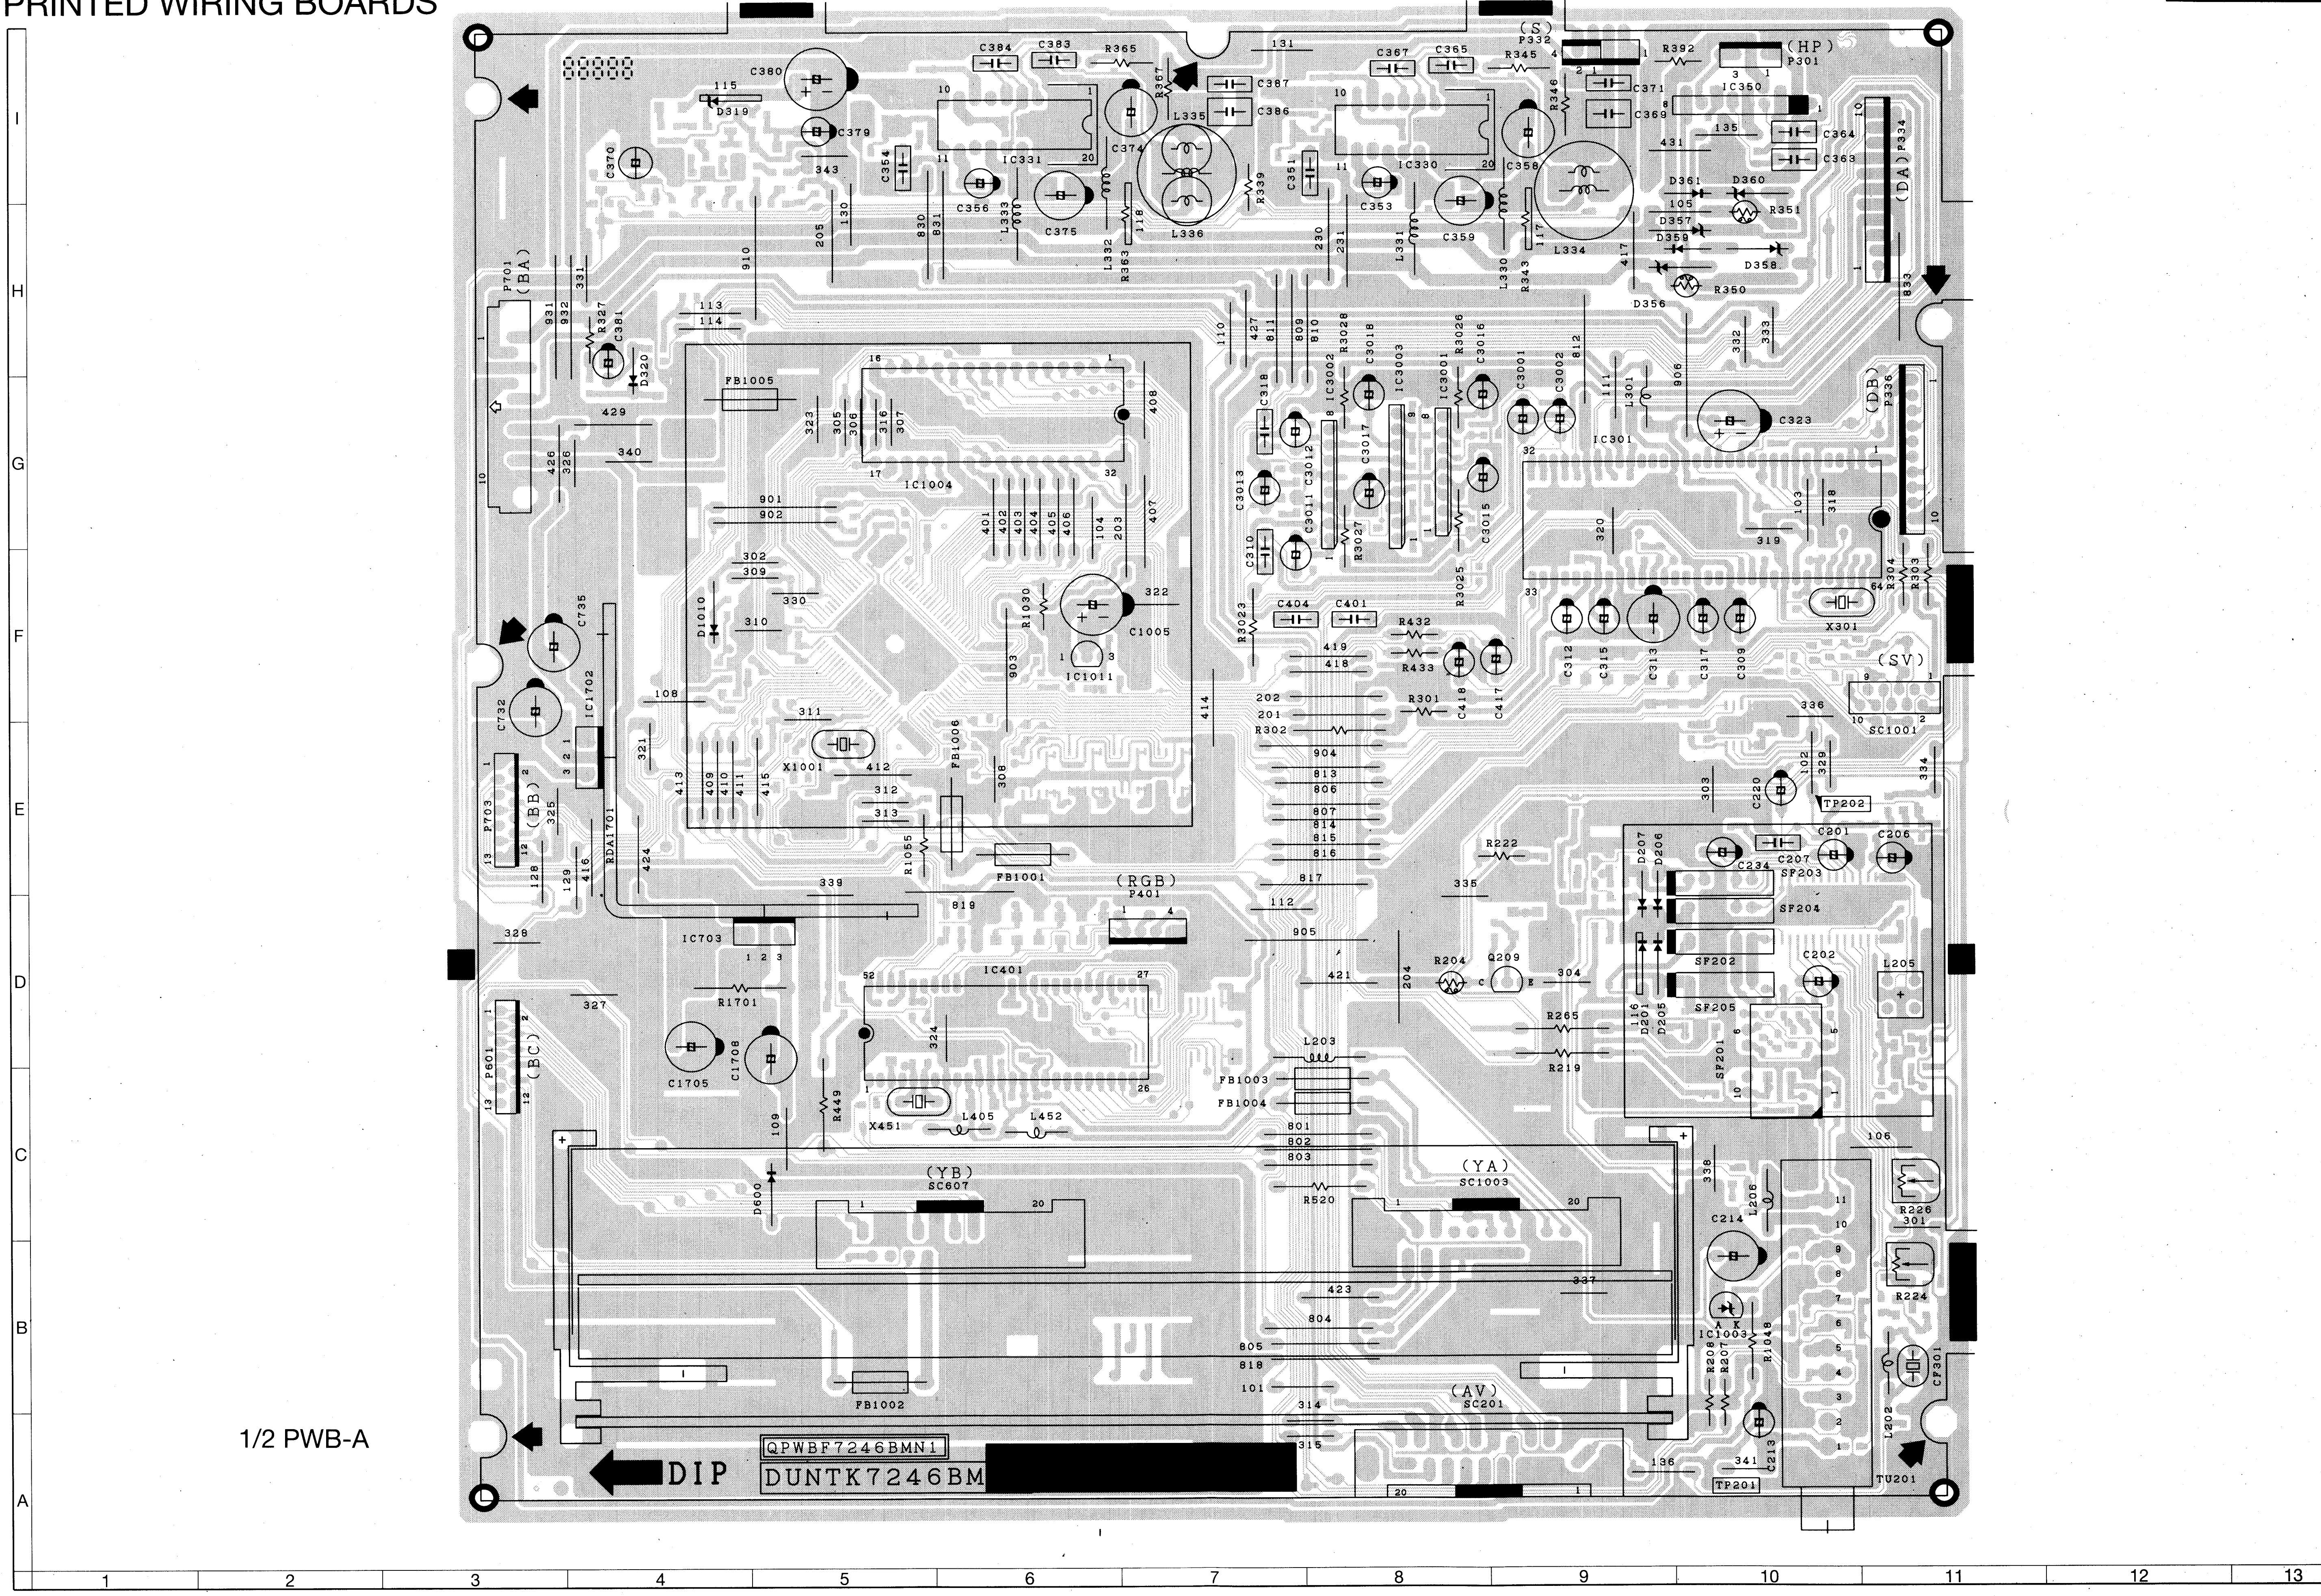
(HP)
P301
(S)
P332
(DA) P334
(DB)
P336
(SV)
SC1001
(BA)
P701
(BB)
P703
(BC)
P601
(RGB)
P401
(YB)
SC607
(YA)
SC1003
(AV)
SC201
IC1004
IC401
IC301
IC330
IC331
IC350
IC703
IC1702
IC1011
IC3001
IC3002
IC3003
IC1003
TU201
X301
X451
X1001
SF201
SF202
SF203
SF204
SF205
TP201
TP202
RDA1701
FB1001
FB1002
FB1003
FB1004
FB1005
FB1006
QPWBF7246BMN1
DIP
DUNTK7246BM
A
B
C
D
E
F
G
H
I
1
2
3
4
5
6
7
8
9
10
11
12
13

1/2 PWB-A

PRINTED WIRING BOARDS

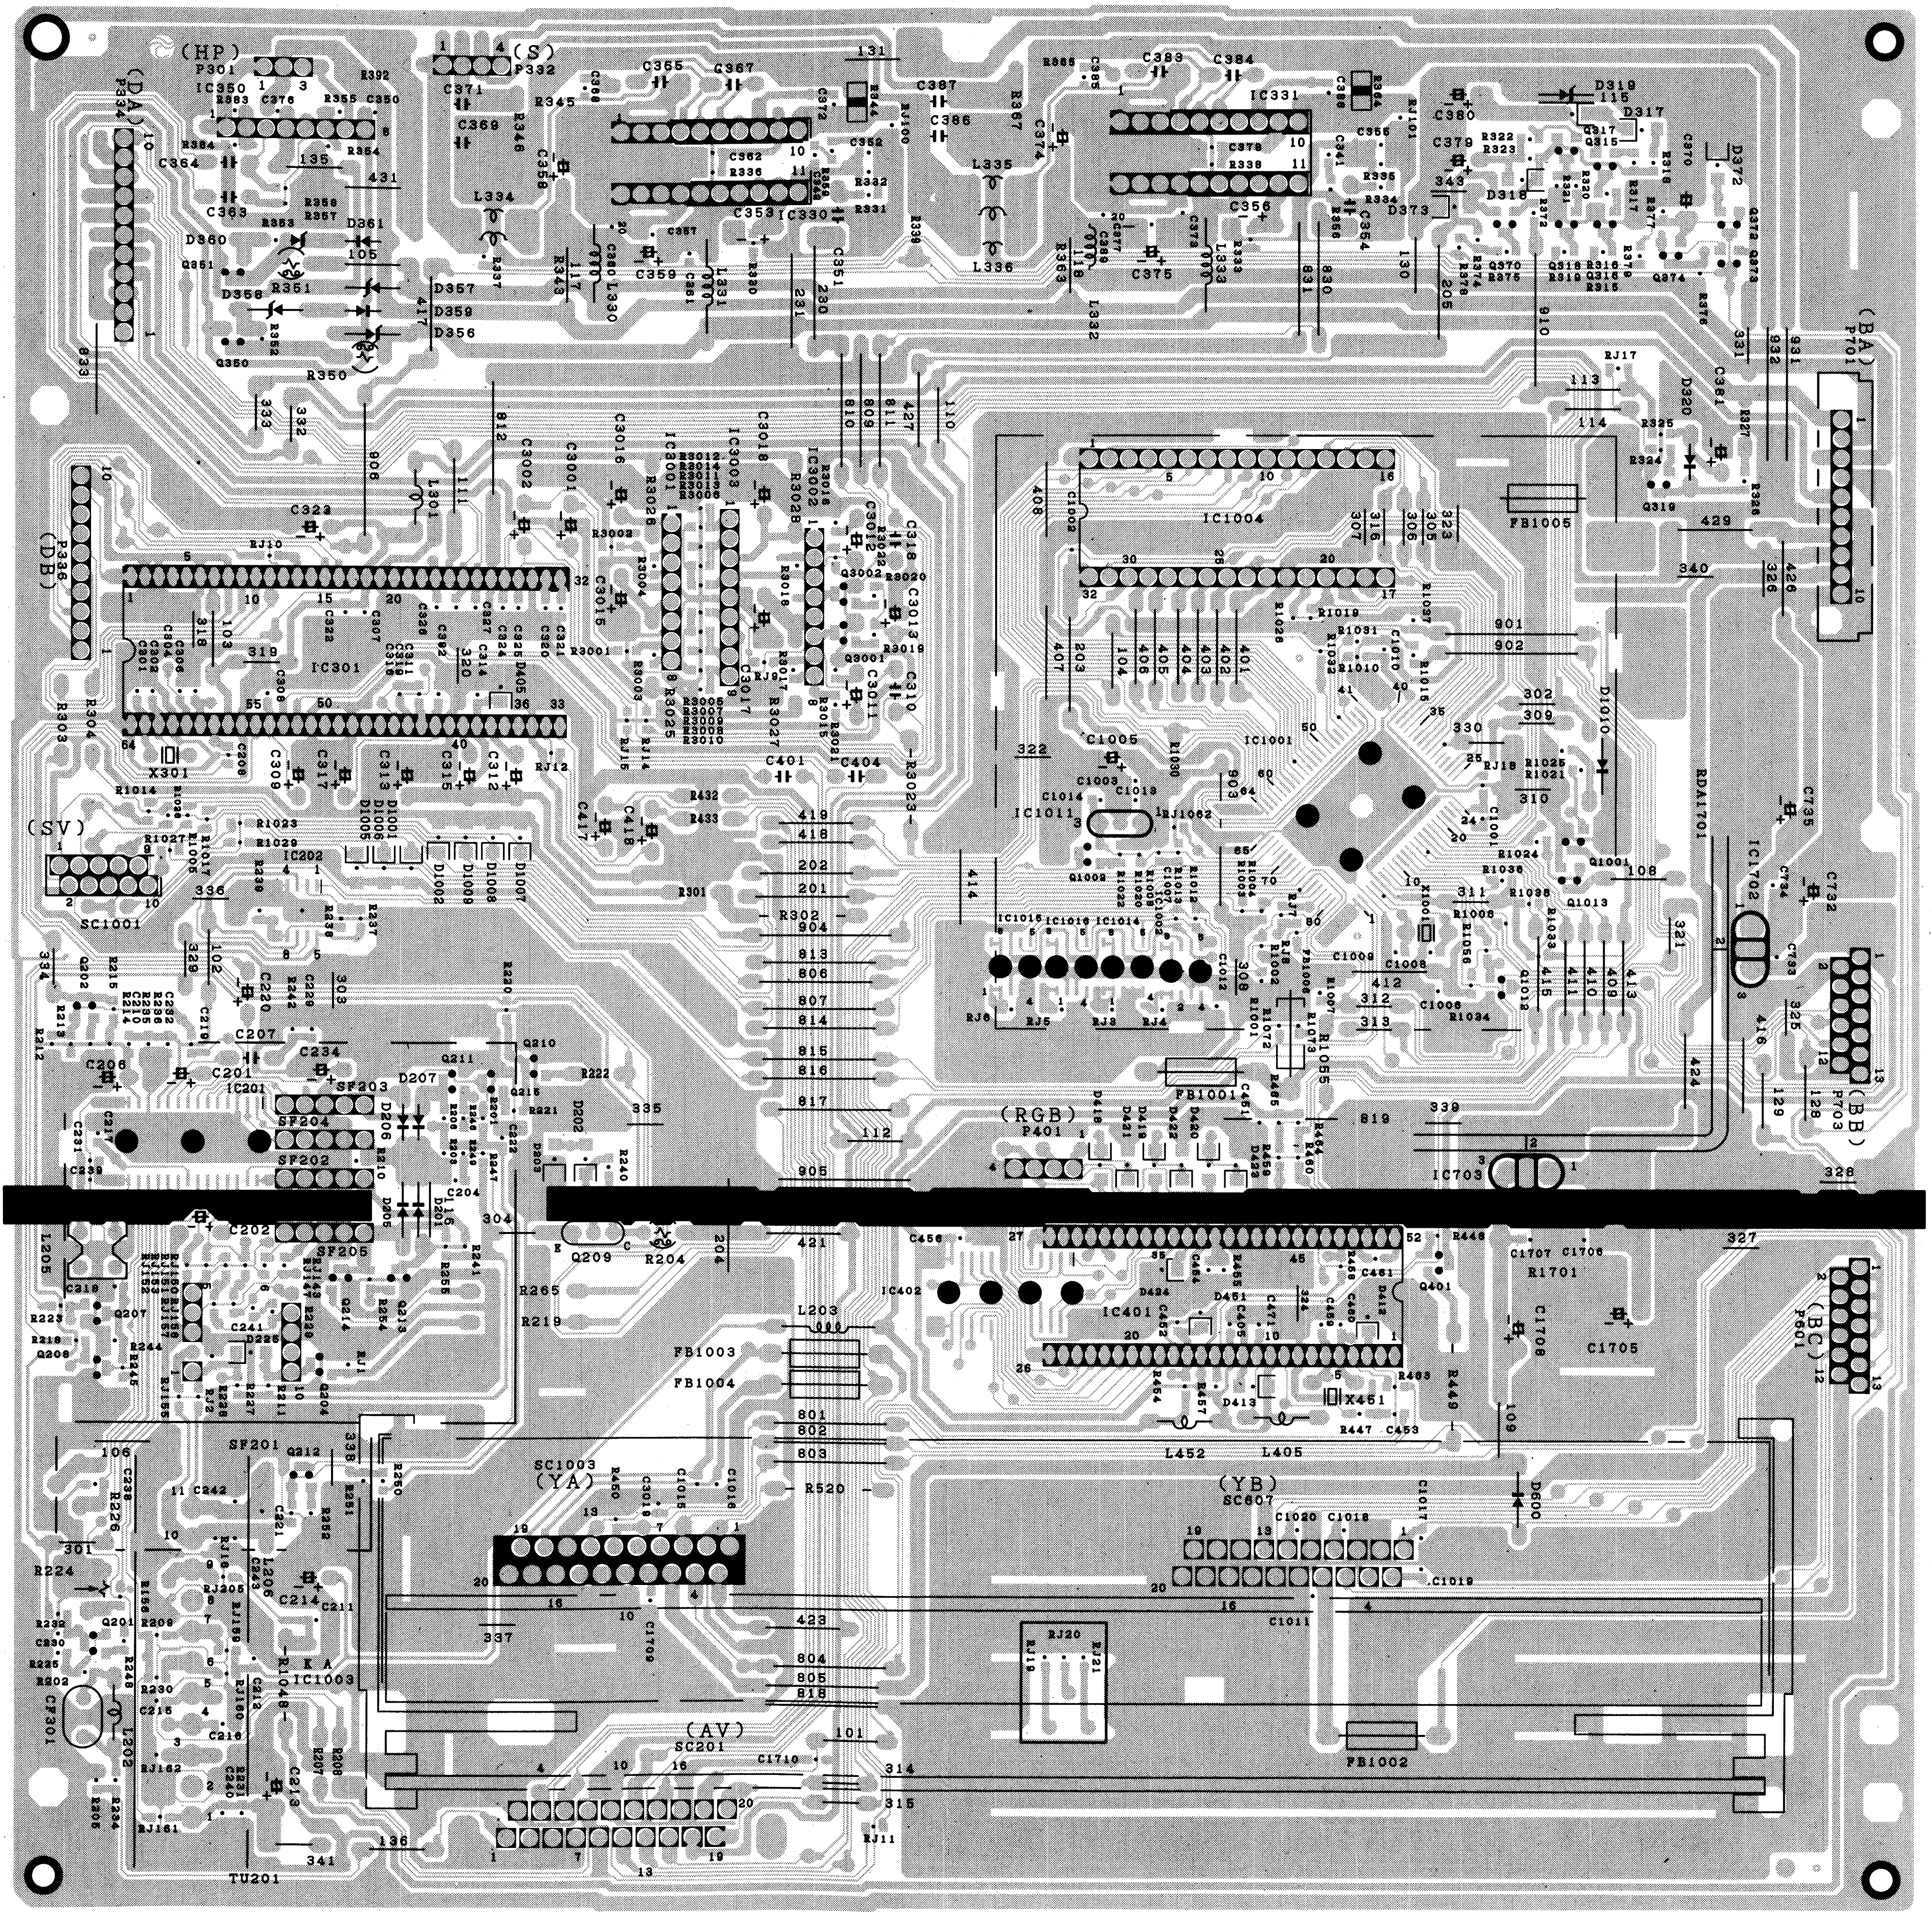
(HP)
P301
(DA)
P334
(S)
P332
(DB)
P336
(SV)
SC1001
IC301
IC350
IC330
IC331
IC1004
IC1001
IC1011
IC3001
IC3002
IC3003
IC201
IC202
IC401
IC402
IC703
IC1702
IC1003
(RGB)
P401
(BA)
P701
(BB)
P703
(BC)
P601
SC1003
(YA)
(YB)
SC607
(AV)
SC201
TU201
FB1001
FB1002
FB1003
FB1004
FB1005
X301
X451
CF301
1
2
3
4
5
6
7
8
9
10
11
12
13

1/2 PWB-A

PRINTED WIRING BOARDS

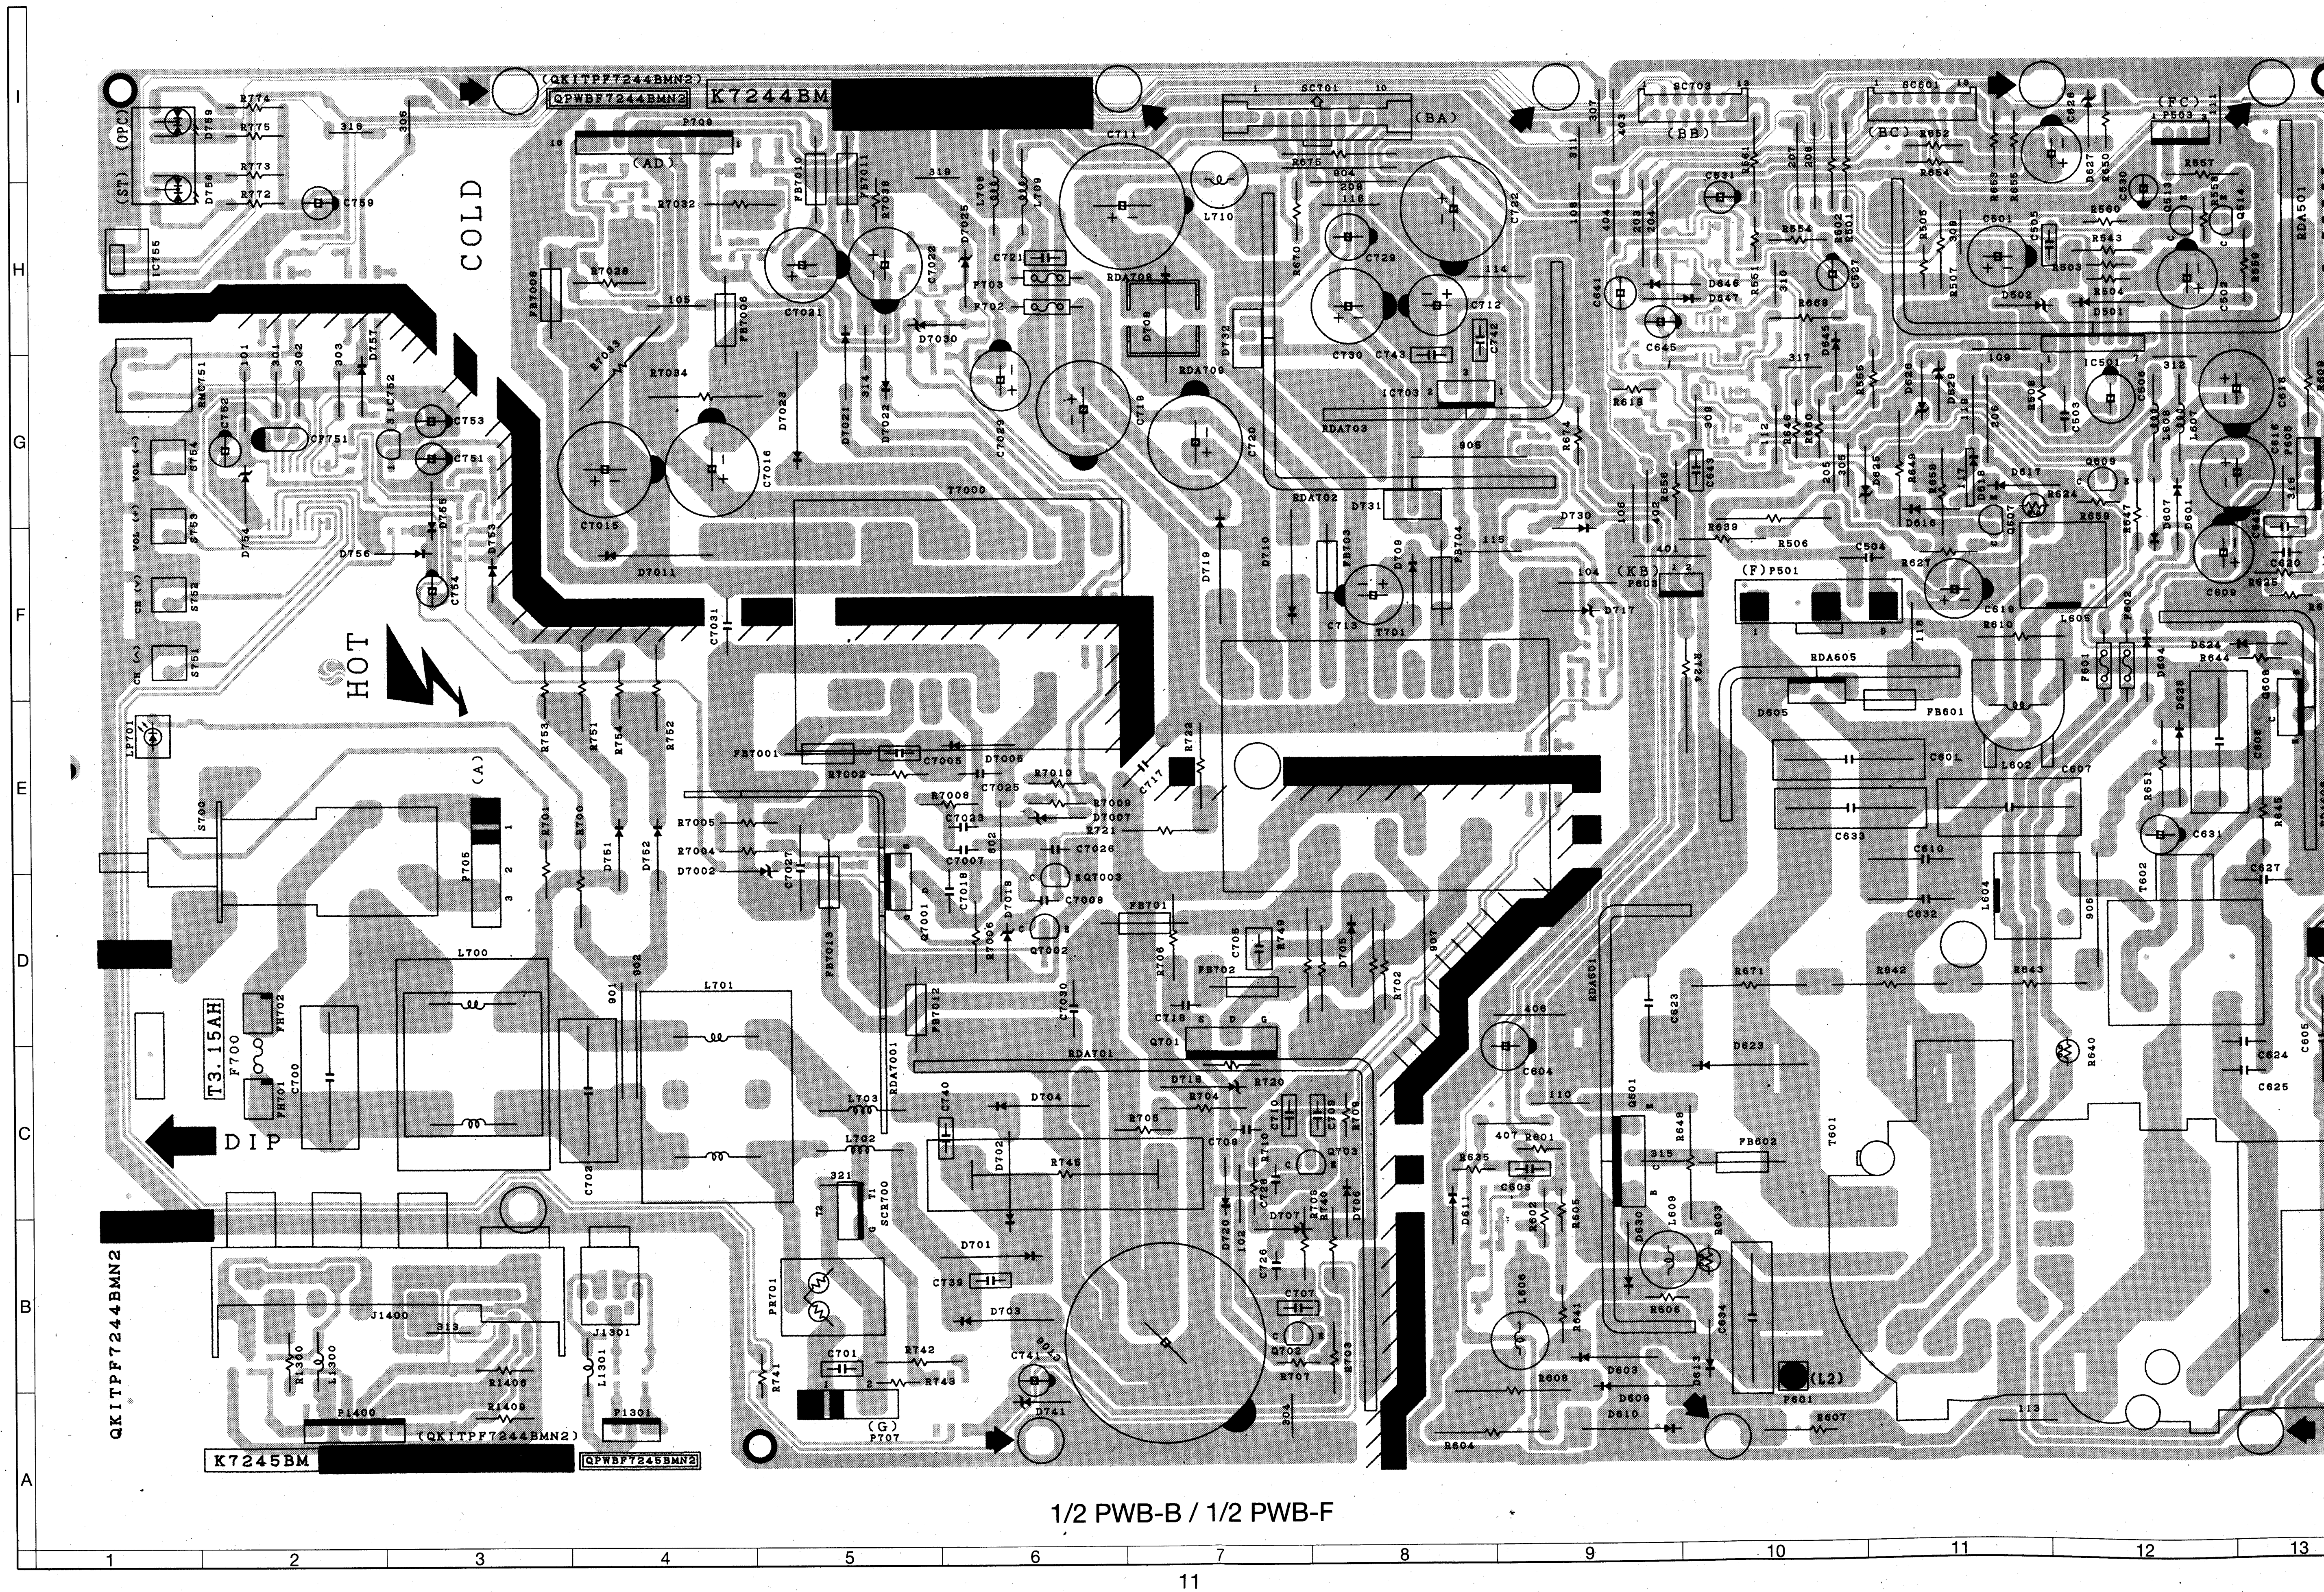
COLD
HOT
DIP
T3.15AH
F700
FH701
FH702
K7244BM
K7245BM
(QKITPF7244BMN2)
QPWBF7244BMN2
QKITPF7244BMN2
QPWBF7245BMN2
(OPC)
(ST)
(AD)
(BA)
(BB)
(BC)
(FC)
(KB)
(F) P501
(G) P707
(A) P705
(L2)
SC701
SC703
SC601
P709
P503
IC755
RMC751
VOL (-)
VOL (+)
CH (∨)
CH (∧)
S751
S752
S753
S754
LP701
S700
L700
L701
T7000
T601
T602
RDA601
RDA605
RDA701
RDA7001
RDA501
A
B
C
D
E
F
G
H
I
1
2
3
4
5
6
7
8
9
10
11
12
13

1/2 PWB-B / 1/2 PWB-F

PRINTED WIRING BOARDS

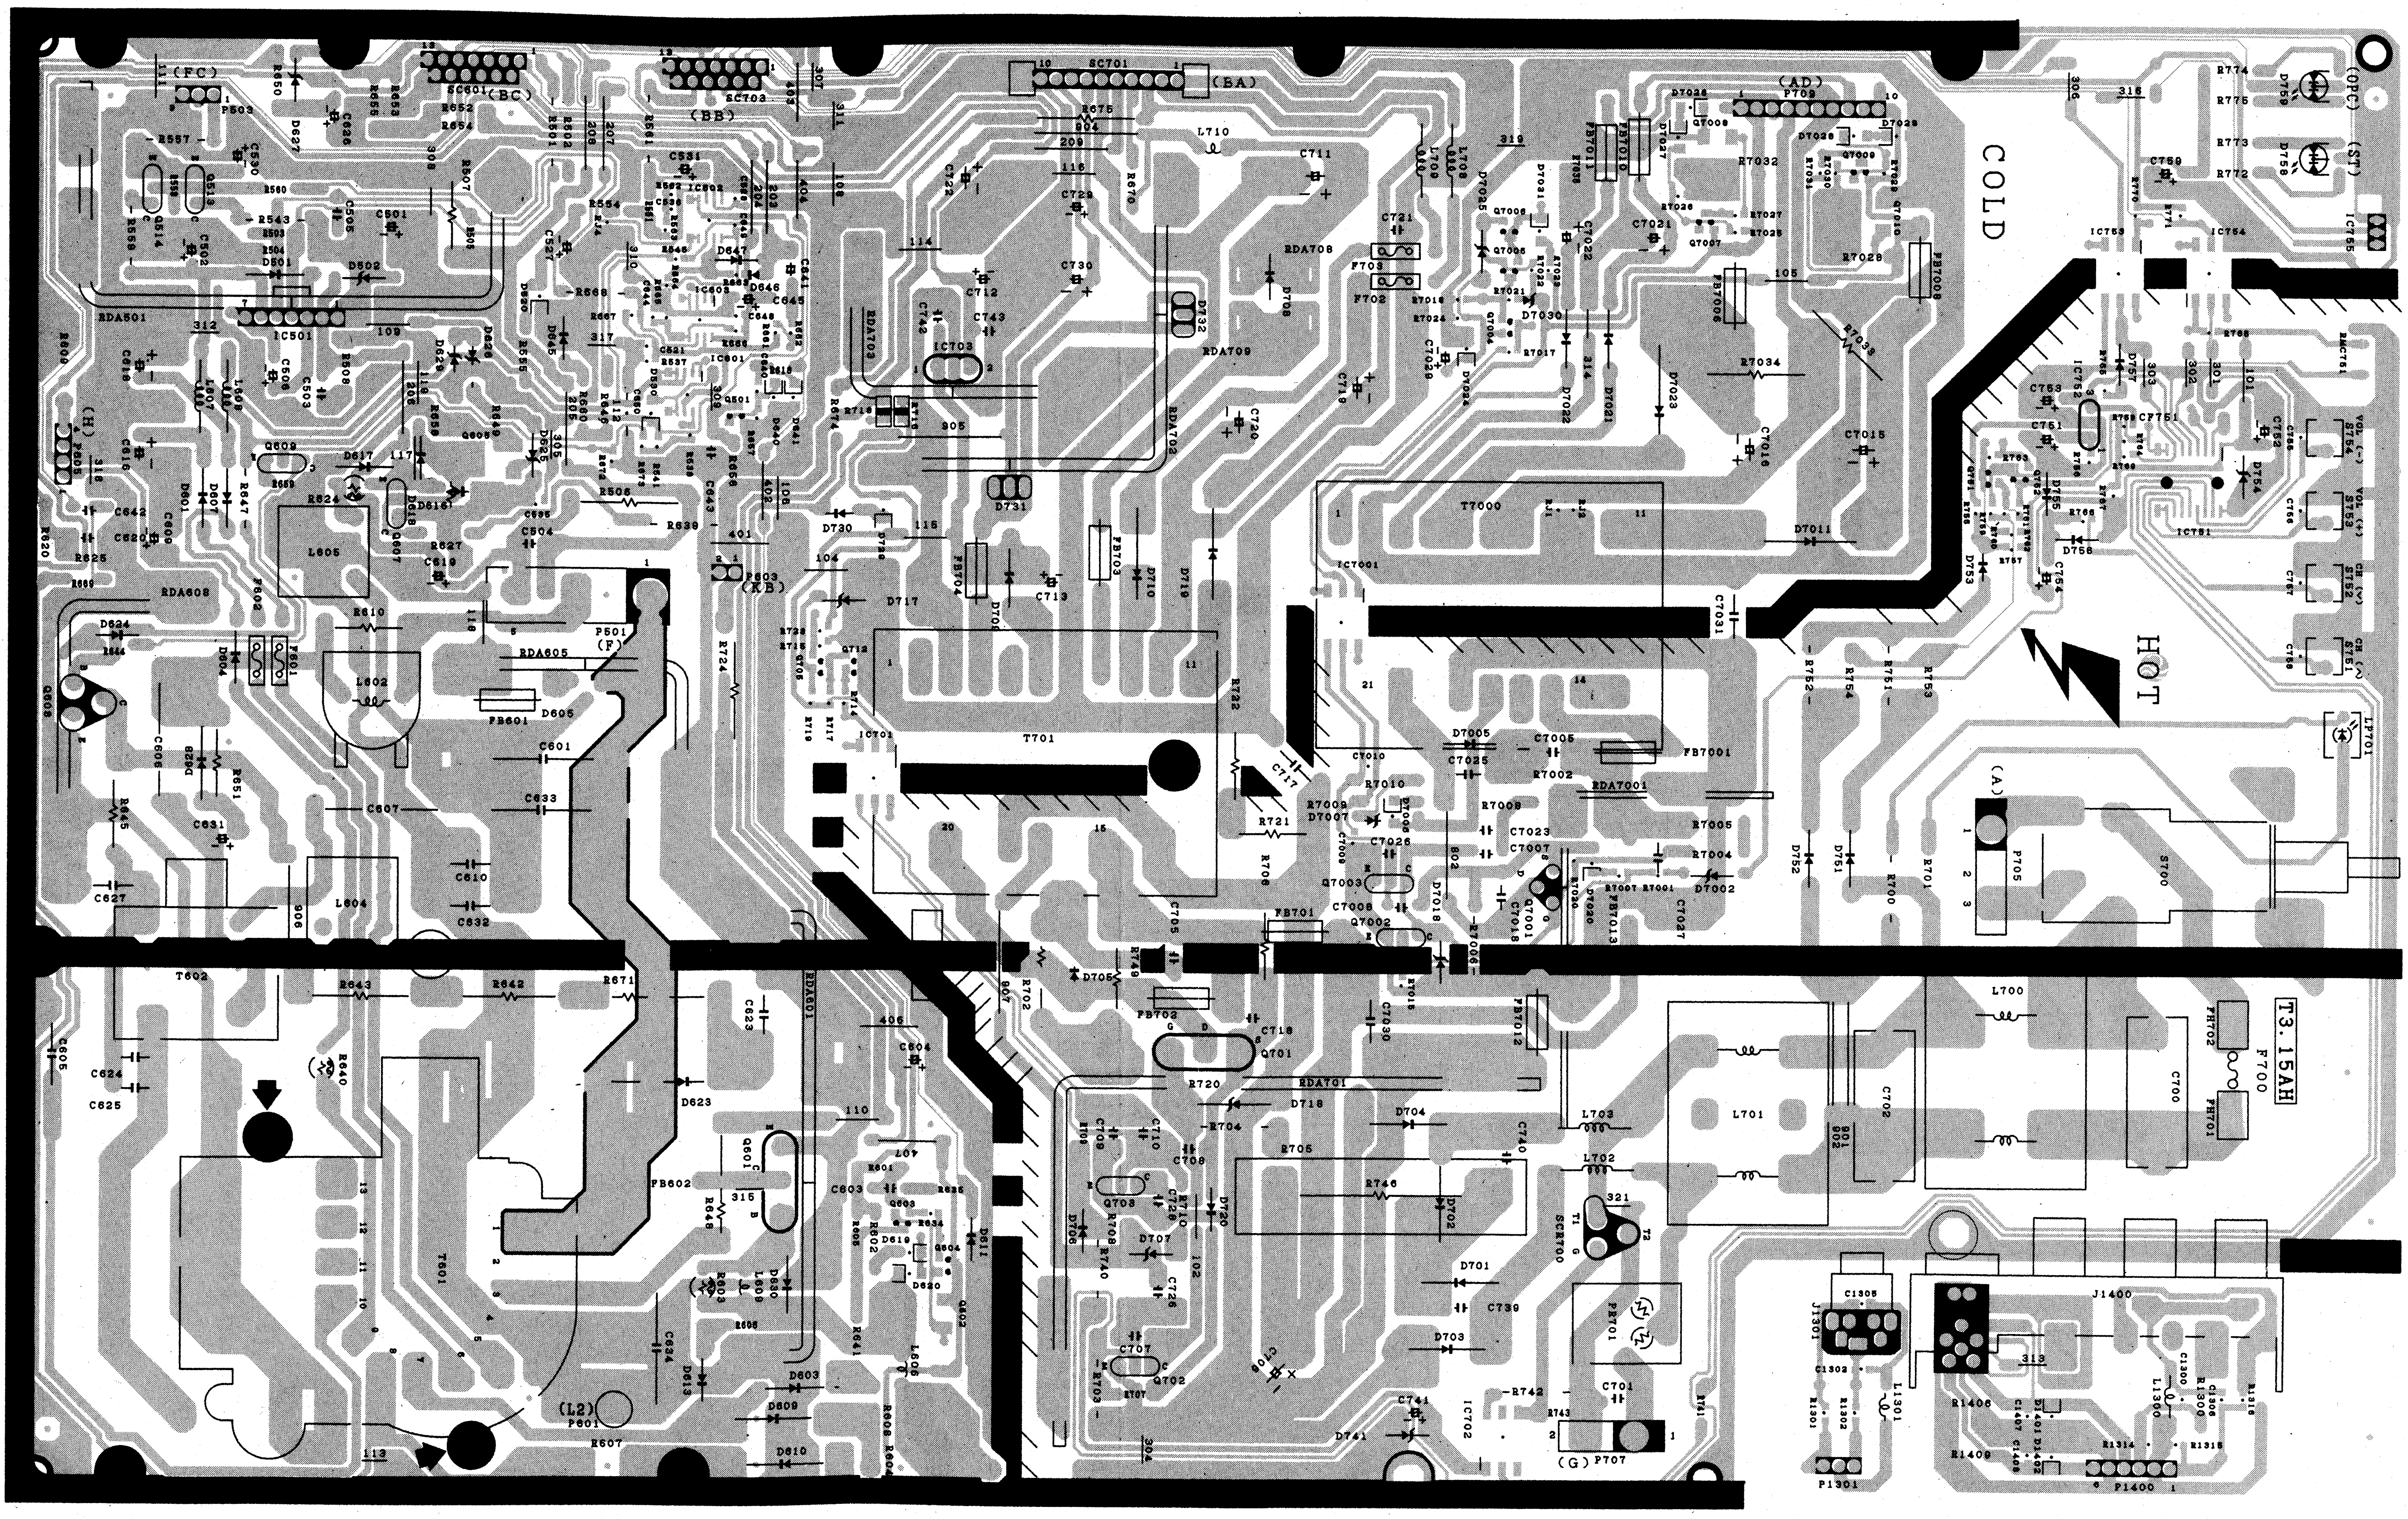
COLD
HOT
T3.15AH
F700
SC701 (BA)
P709 (AD)
SC601 (BC)
SC703 (BB)
P503 (FC)
P505 (H)
P501 (F)
P503 (KB)
P601 (L2)
P707 (G)
P705 (A)
T701
T601
T602
T7000
IC7001
IC501
J1400
J1301
P1400
P1301
ST51 CH (^)
ST52 CH (v)
ST53 VOL (+)
ST54 VOL (-)
D758 (ST)
D759 (OPC)
1 2 3 4 5 6 7 8 9 10 11 12 13

1/2 PWB-B / 1/2 PWB-F

PRINTED WIRING BOARDS

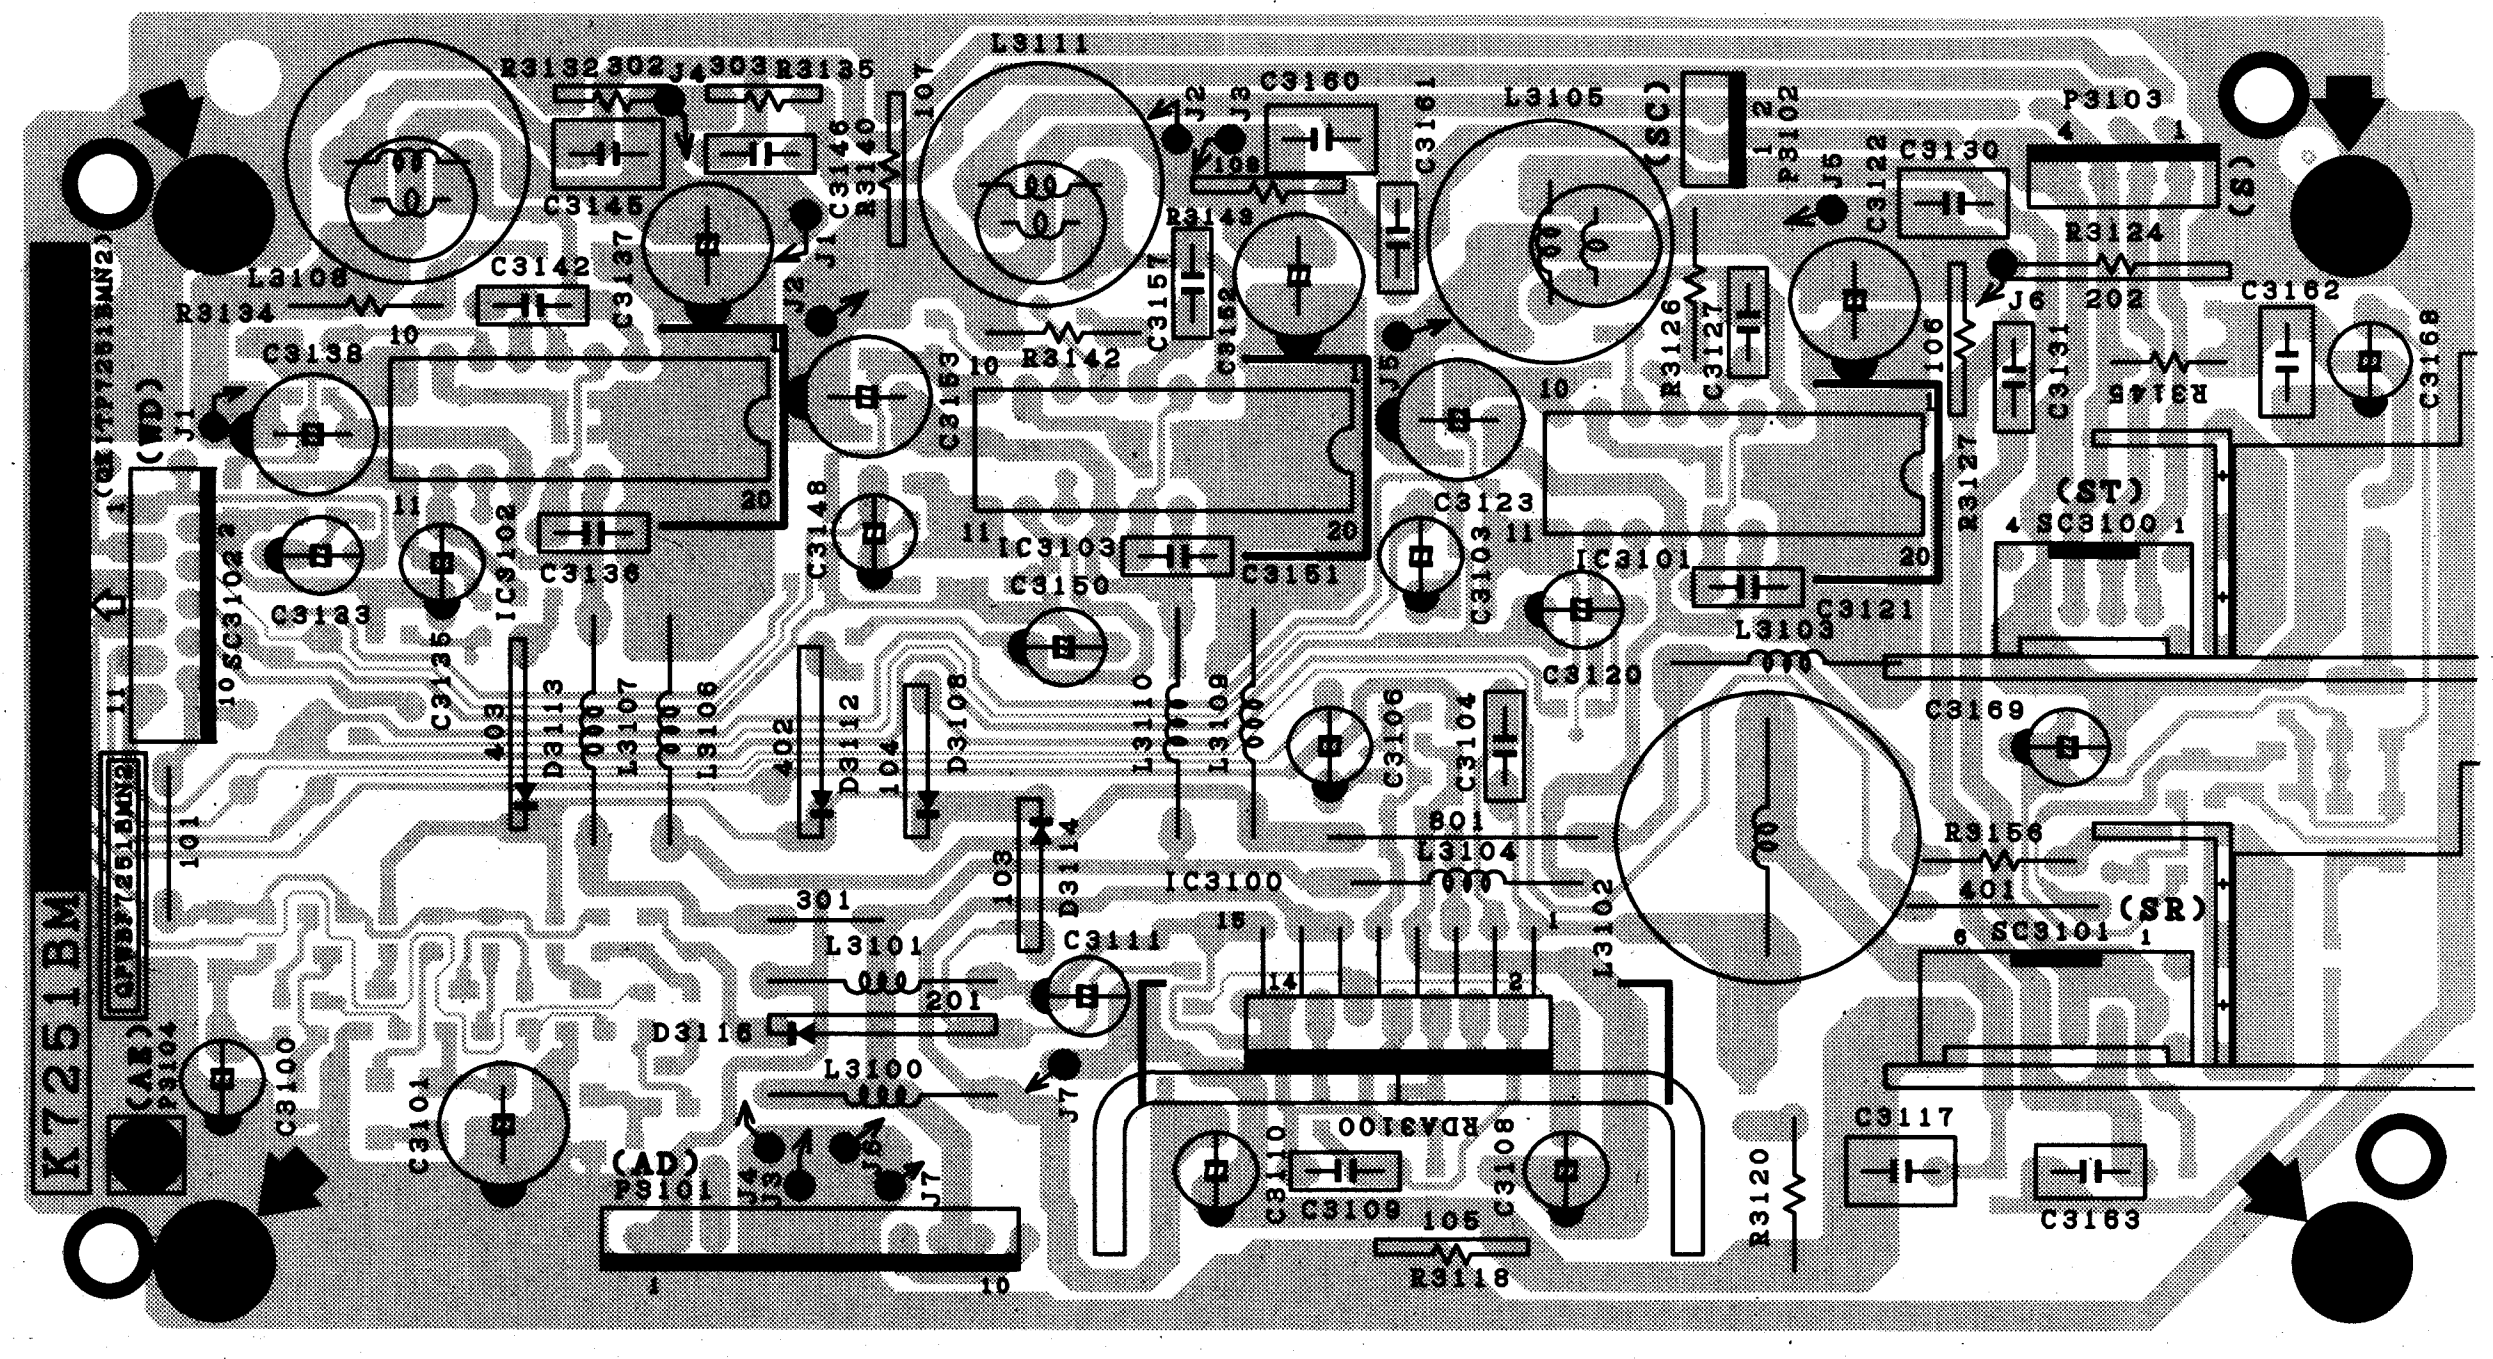
K7251BM
QPWBF7251BMN2
(QKITP7251BMN2)
(WD)
(AE)
(AD)
(SC)
(S)
(ST)
(SR)
IC3100
IC3101
IC3102
IC3103
L3111
L3105
L3106
L3102
PS101
PS102
P3103
SC3100
SC3101
SC3102
EDA3100

1/2 PWB-H

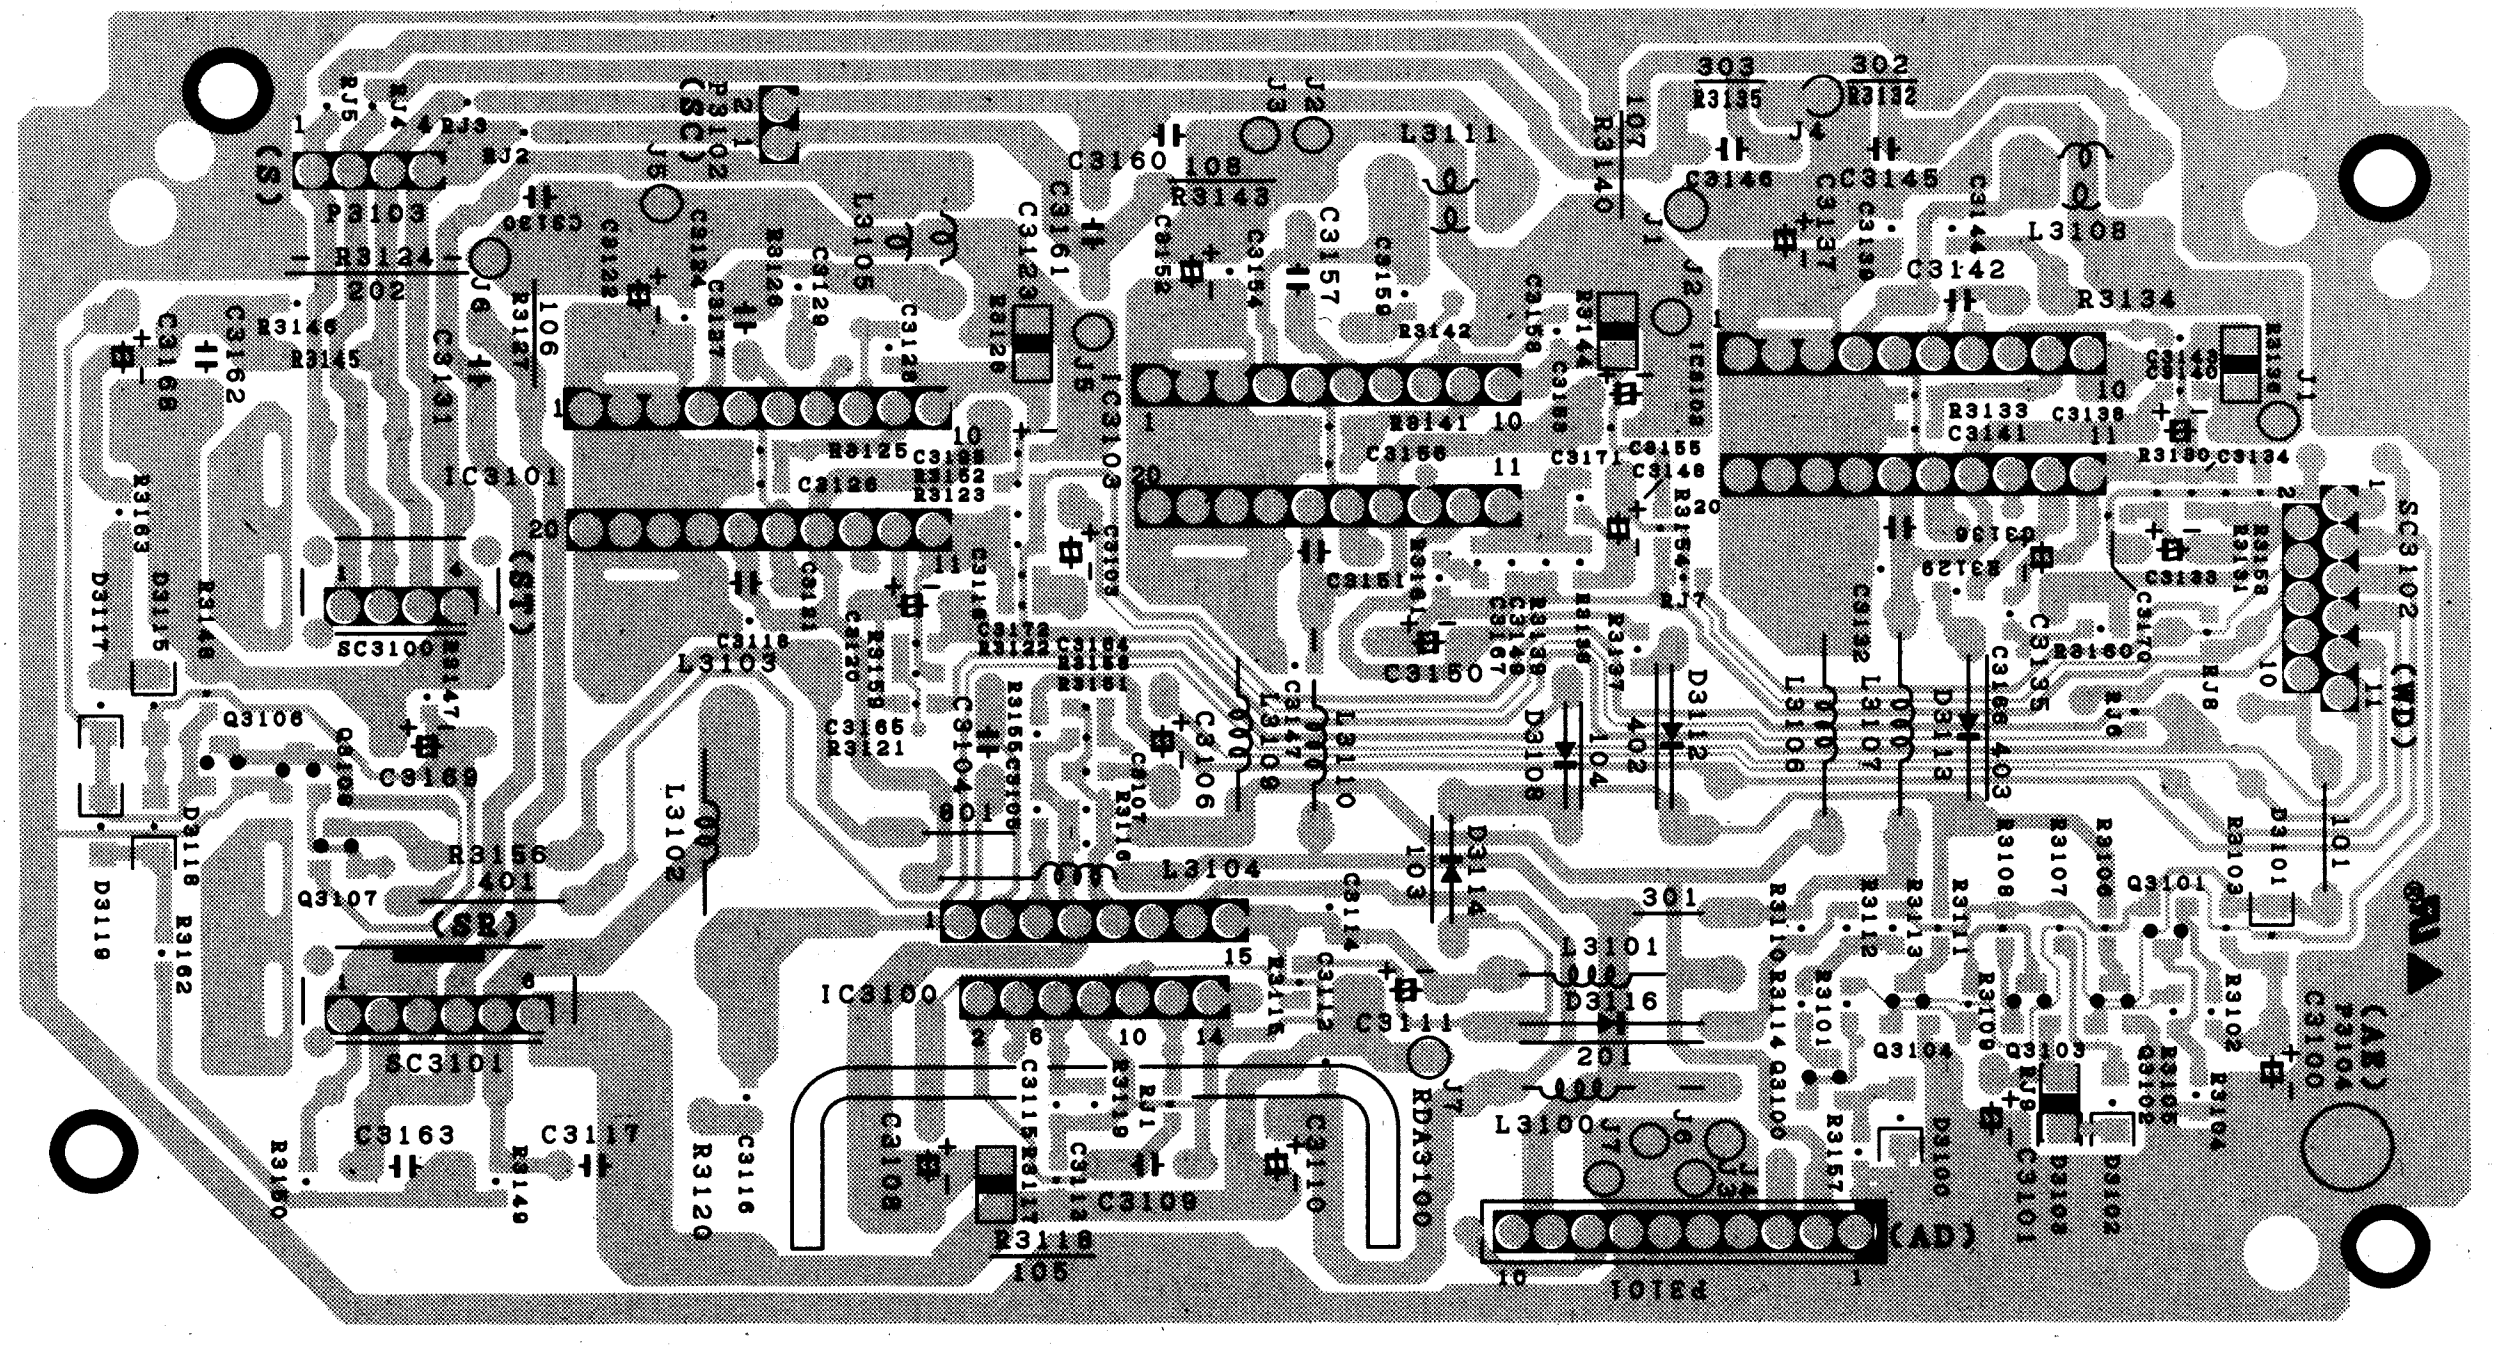
(S)
(SC)
(ST)
(SR)
(AE)
(AD)
(WD)
IC3100
IC3101
IC3103
SC3100
SC3101
SC3102
P3101
P3103
P3104
EDA3100

1/2 PWB-H

PRINTED WIRING BOARDS

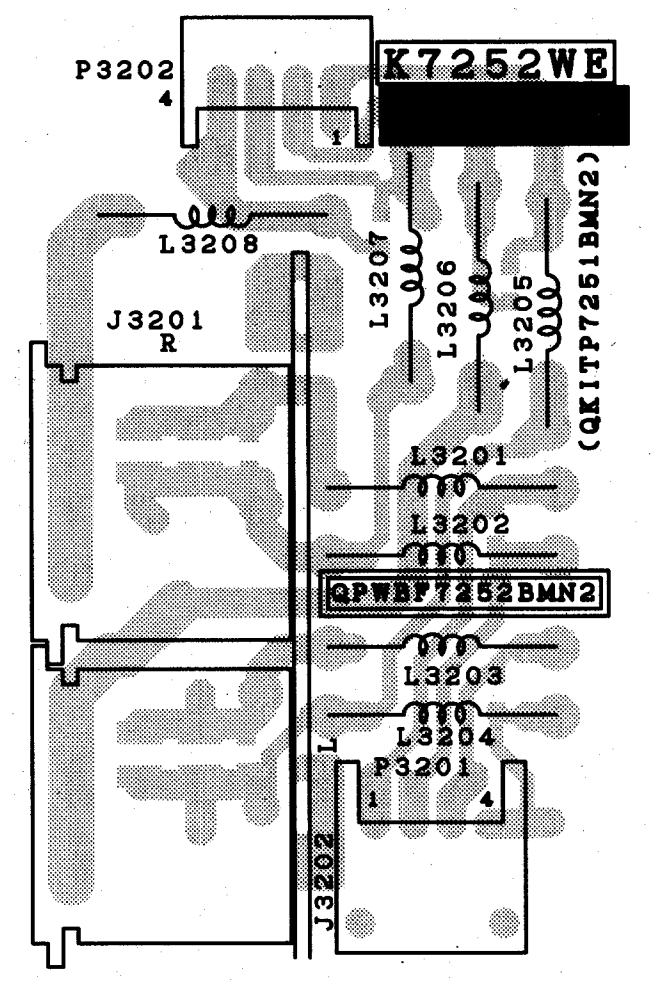
K7252WE
QPWBF7252BMN2
(QKITP7251BMN2)
P3202
P3201
J3201
J3202
L3201
L3202
L3203
L3204
L3205
L3206
L3207
L3208

1/2 PWB-I

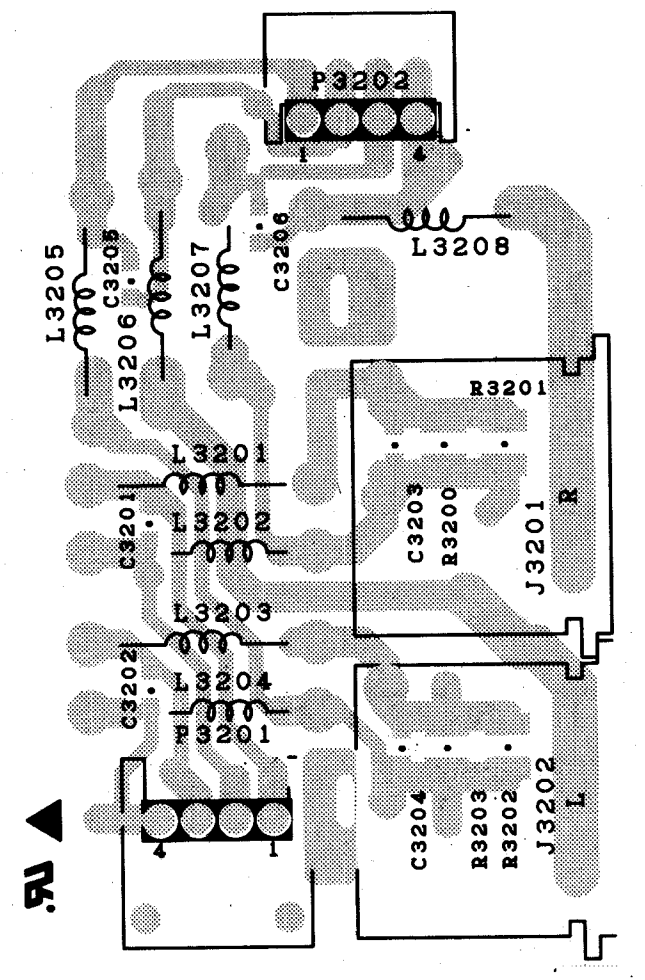
P3202
P3201
J3201
J3202
L3201
L3202
L3203
L3204
L3205
L3206
L3207
L3208
R3200
R3201
R3202
R3203

1/2 PWB-

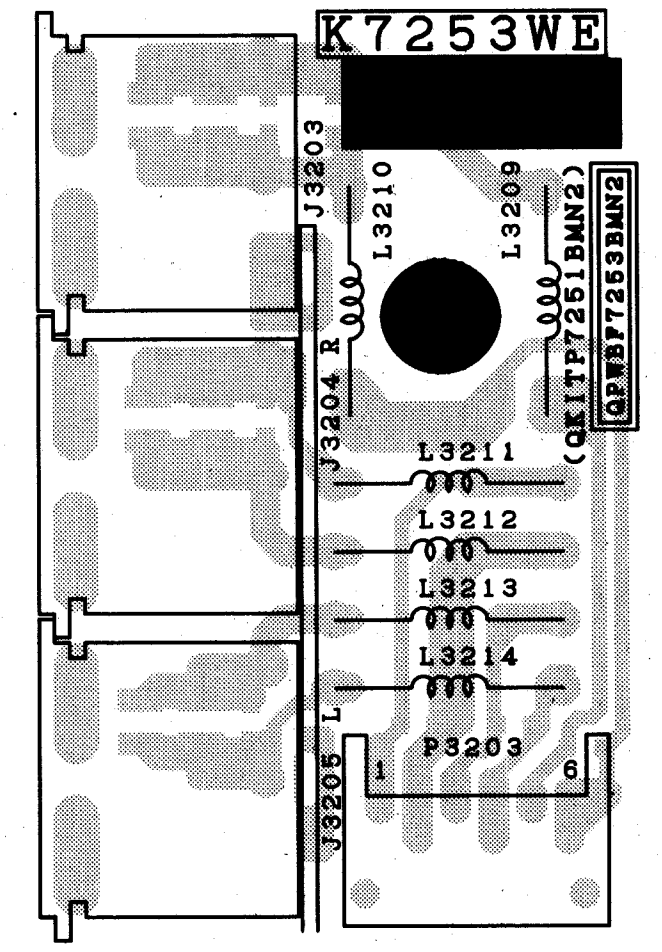
K7253WE
QPWBF7253BMN2
(QKITP7251BMN2)
J3203
J3204
J3205
L3209
L3210
L3211
L3212
L3213
L3214
P3203

1/2 PWB-J

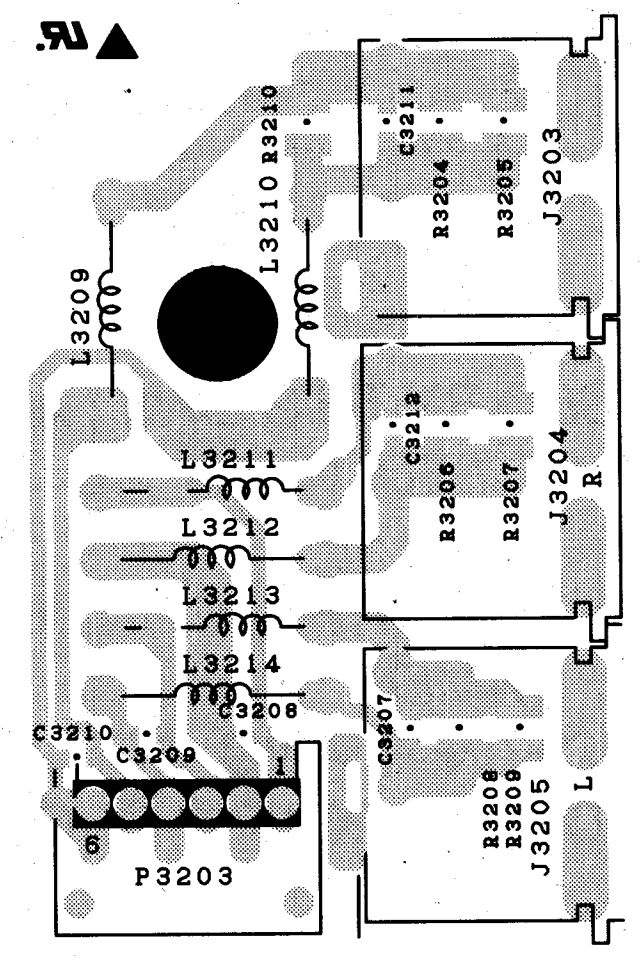
J3203
J3204
J3205
L3209
L3210
L3211
L3212
L3213
L3214
P3203

1/2 PWB-

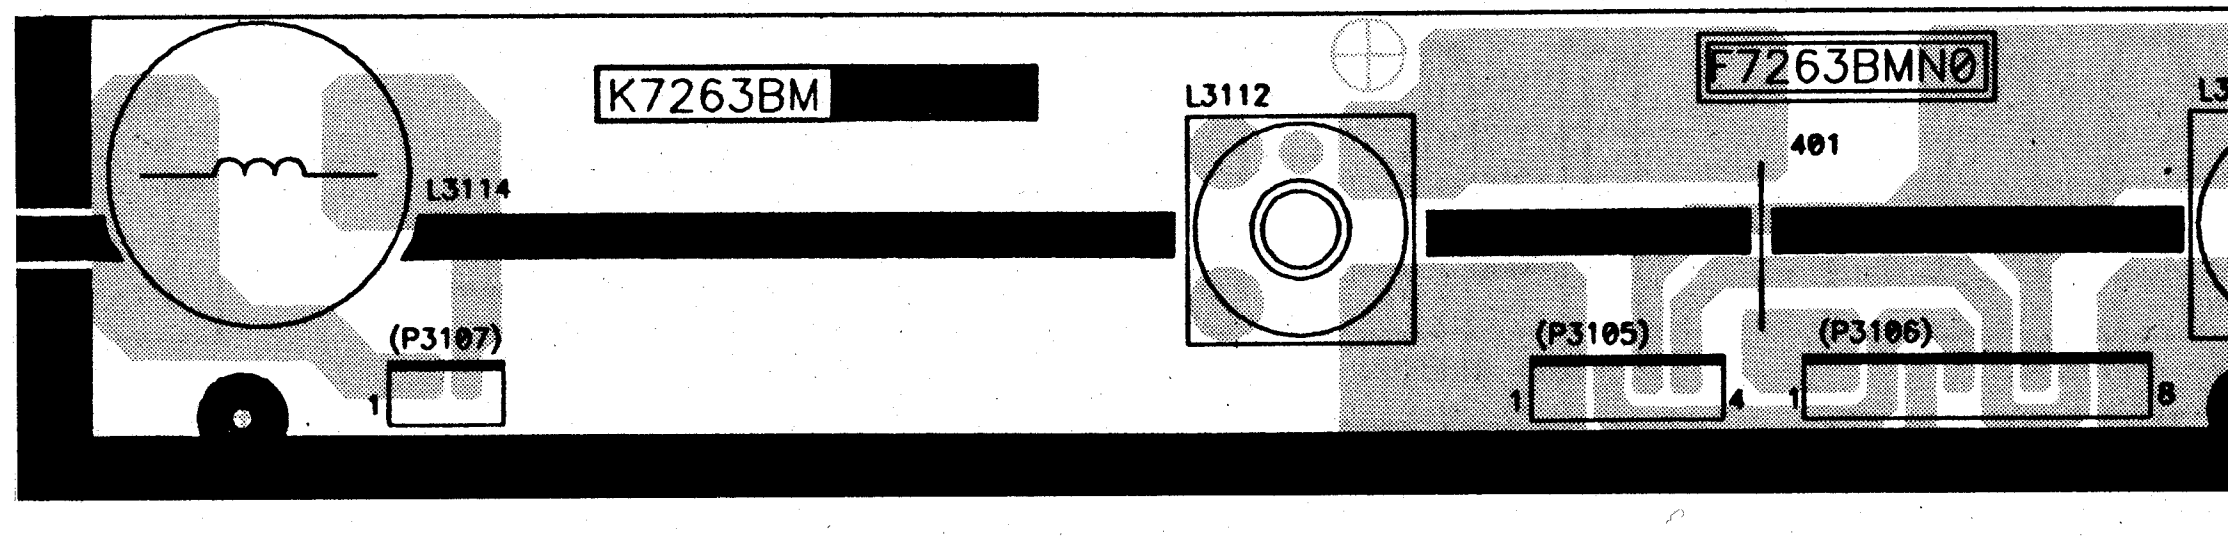
K7263BM
F7263BMN0
L3114
L3112
401
(P3107)
(P3105)
(P3106)

1/2 PWB-K

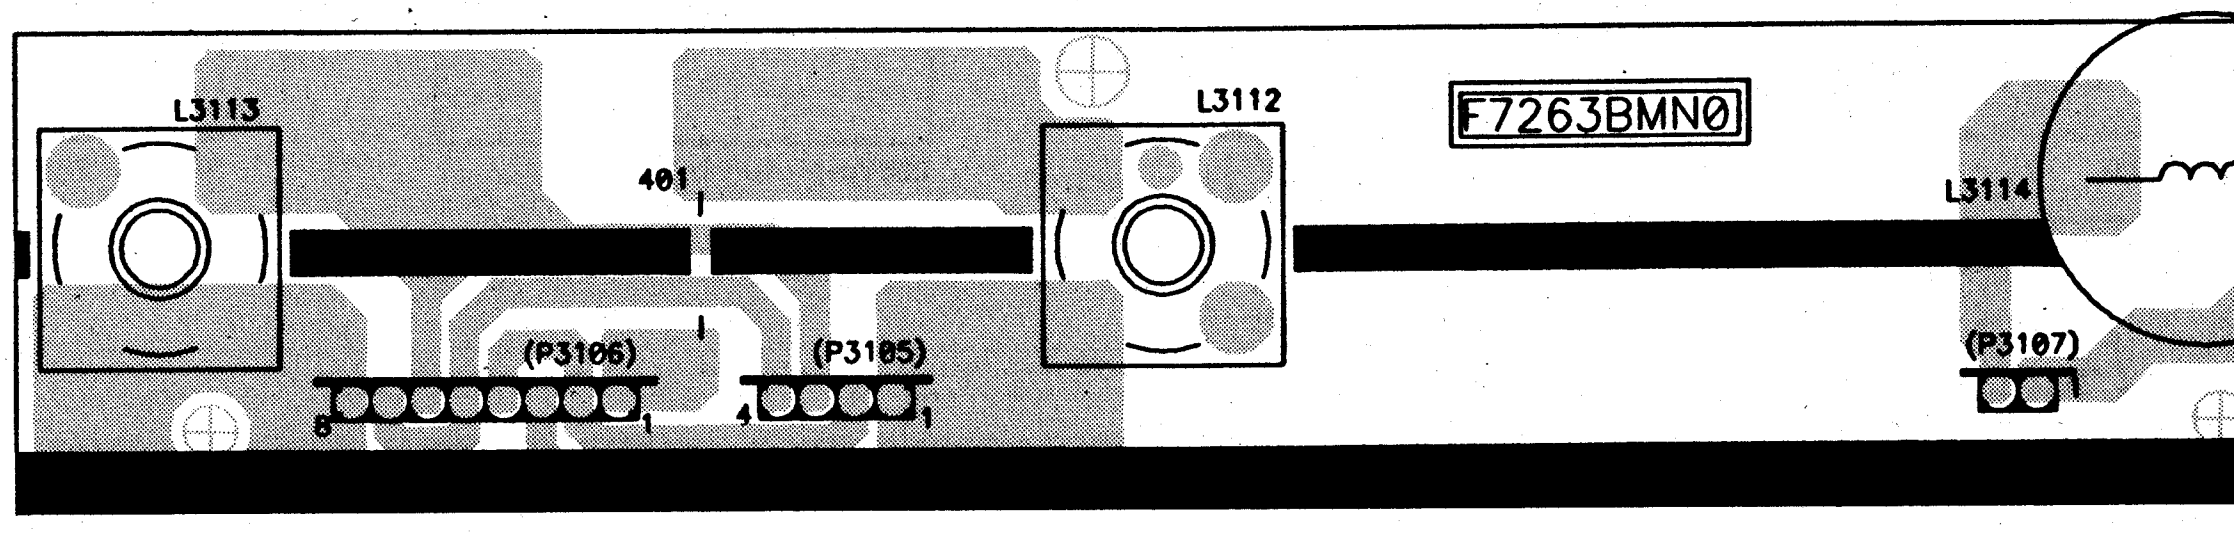
F7263BMN0
L3113
L3112
L3114
401
(P3106)
(P3105)
(P3107)

1/2 PWB-K

PRINTED WIRING BOARDS

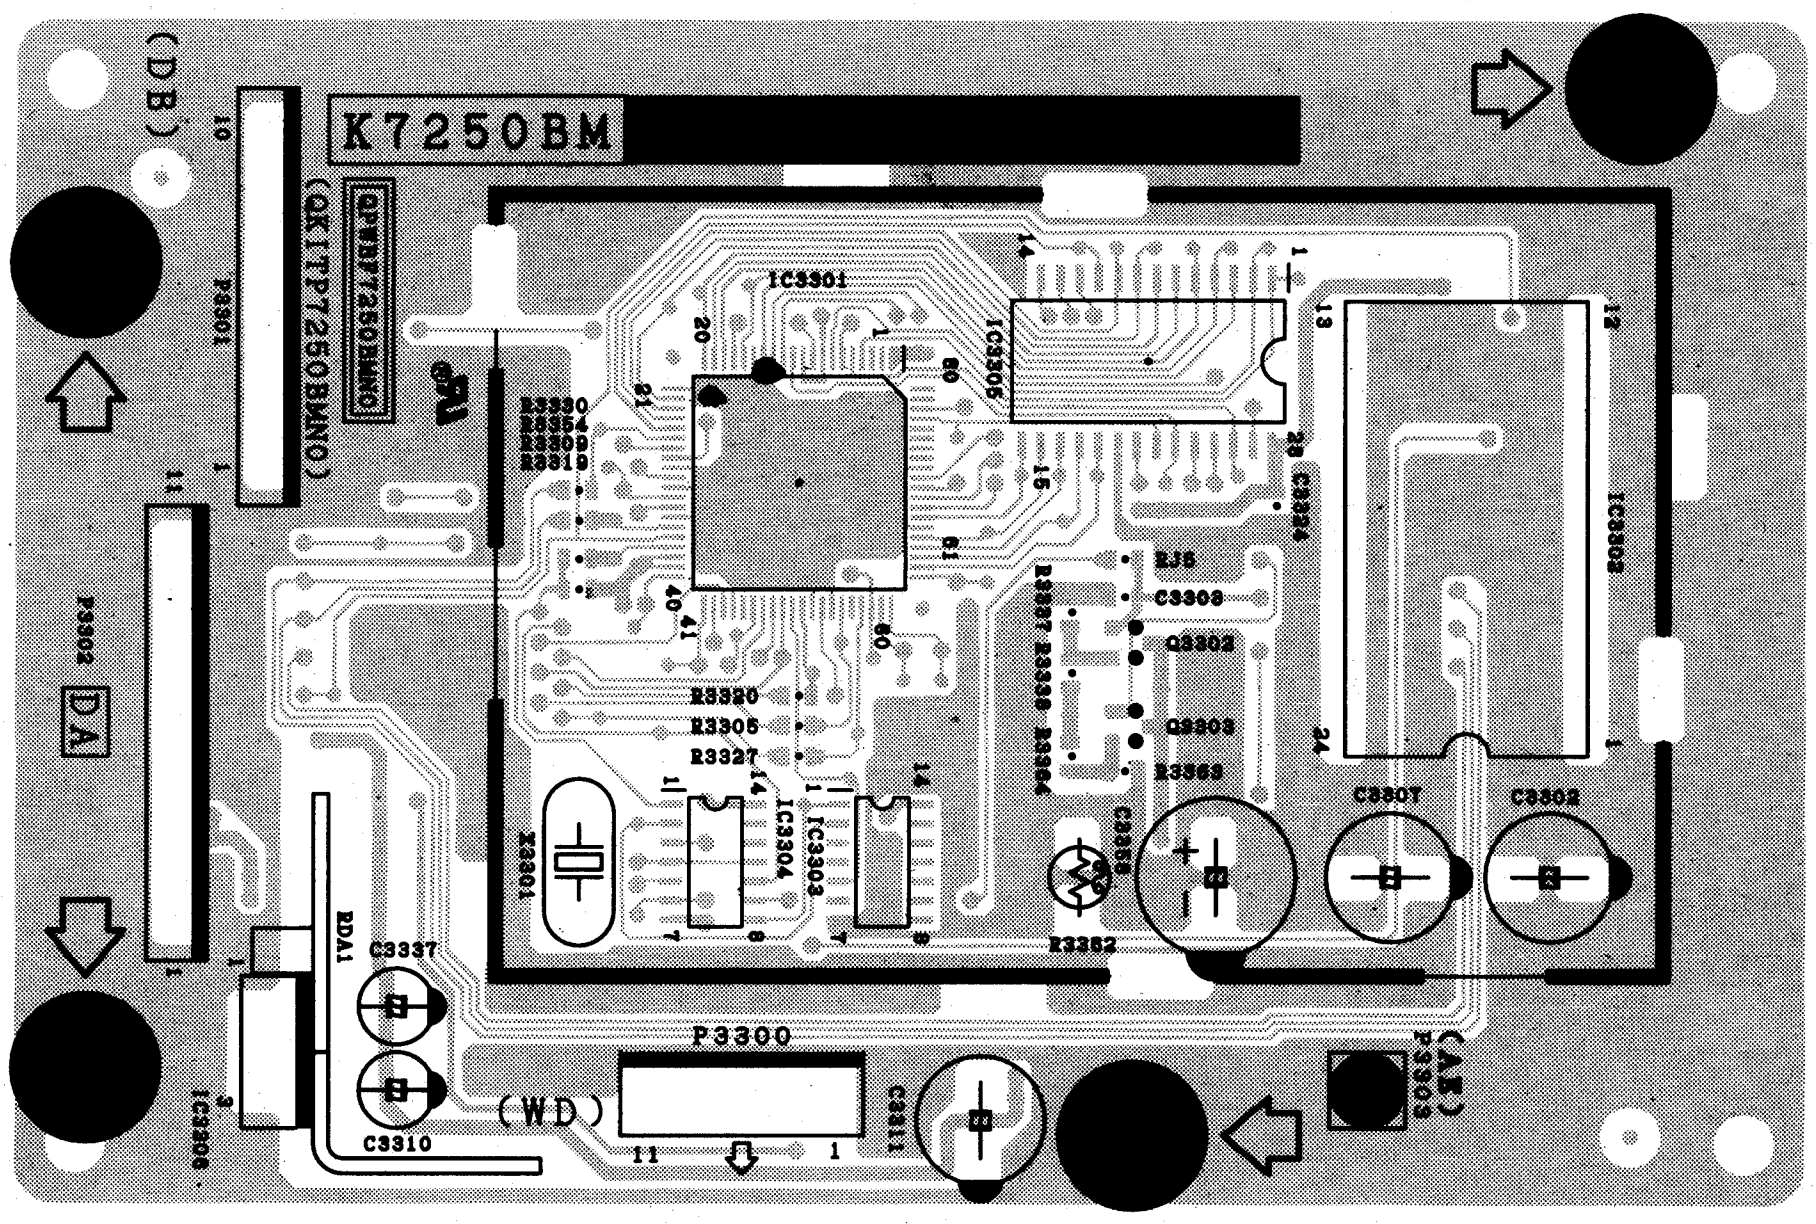
K7250BM
(DB)
P3301
(QKITP7250BMNO)
P3302
DA
IC3301
IC3305
IC3302
IC3303
IC3304
X3301
EDA1
C3337
C3310
IC3306
P3300
(WD)
C3311
(AE)
P3303
C3307
C3302
C3326
Q3302
Q3303
R3362

1/2 PWB-G

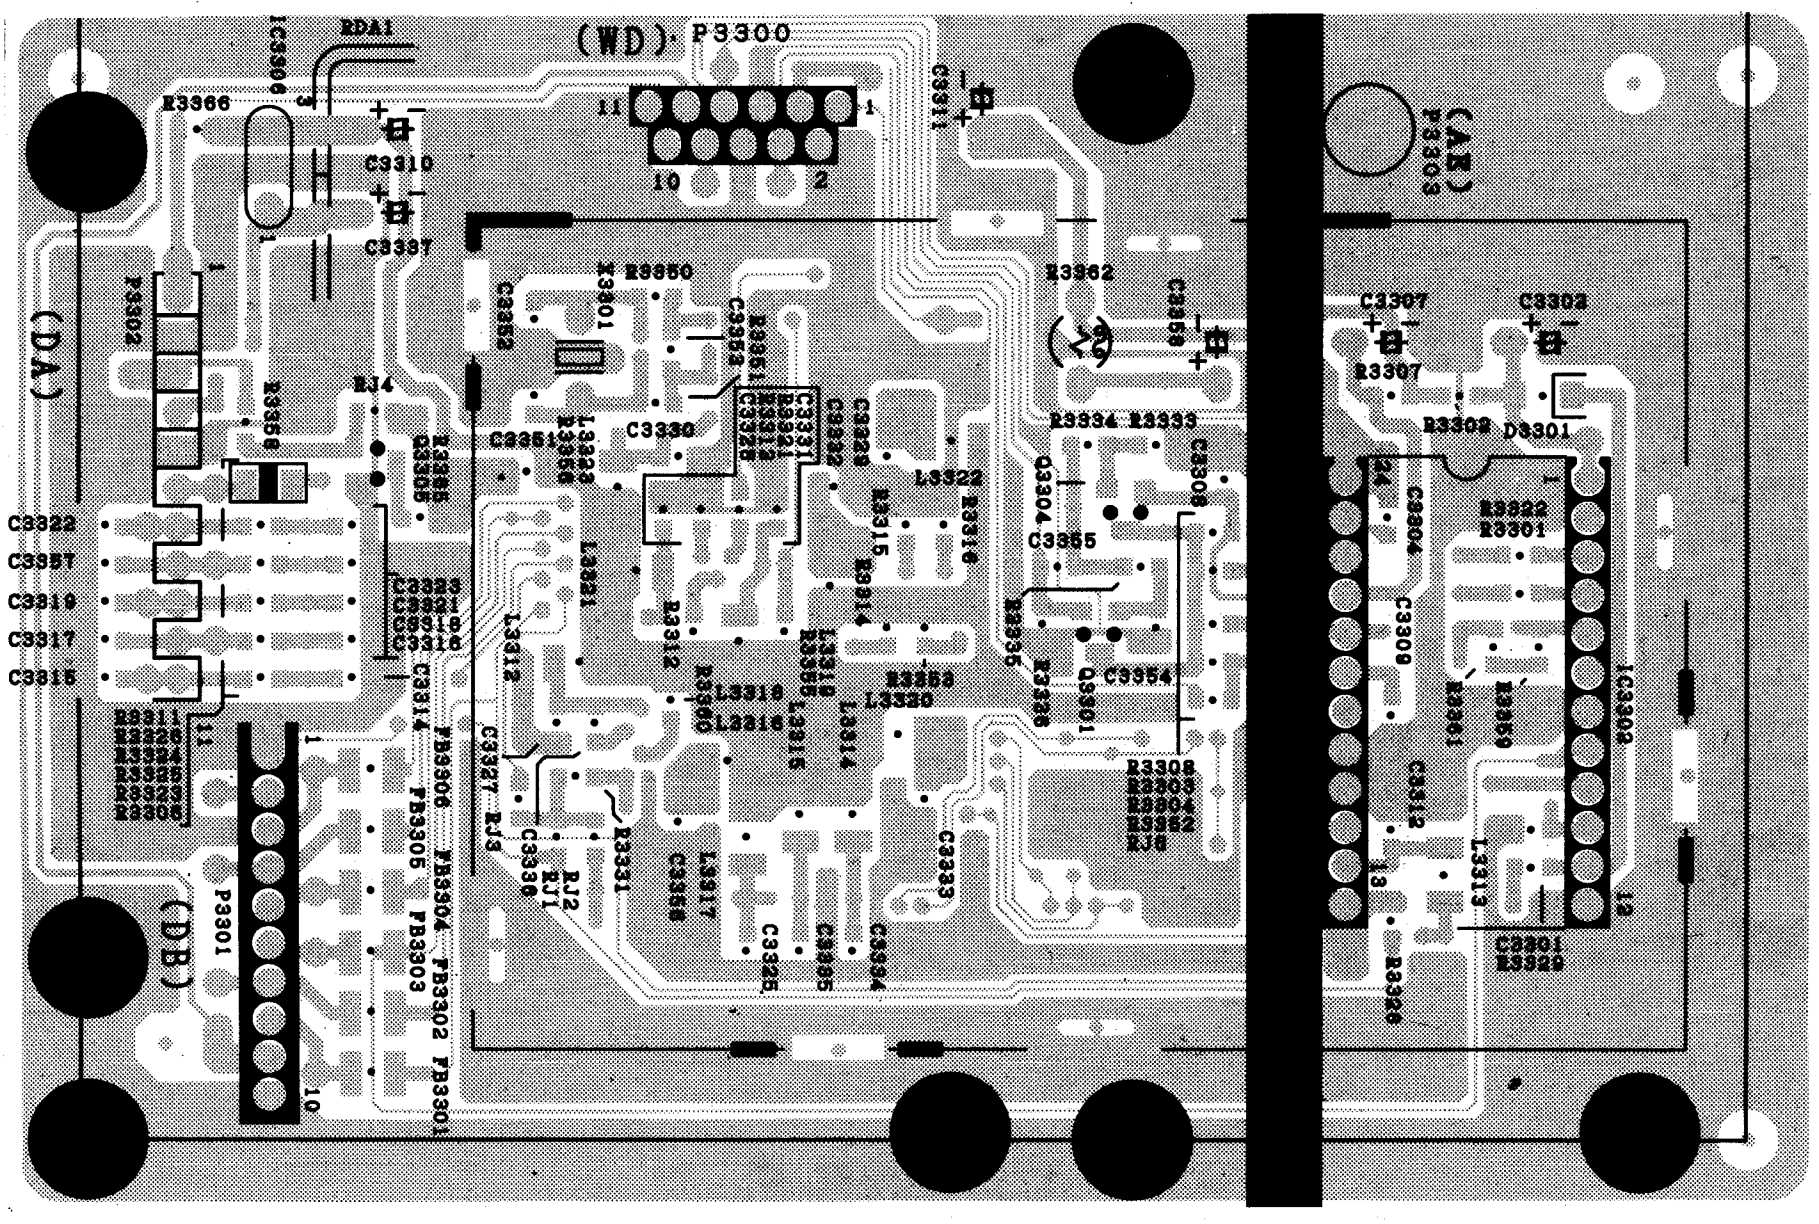
(WD) P3300
EDA1
IC3306
R3366
C3310
C3337
C3311
(AE)
P3303
C3307
C3302
D3301
(DA)
P3302
(DB)
P3301
IC3302
C3322
C3387
C3319
C3317
C3315
FB3301
FB3302
FB3303
FB3304
FB3305
FB3306
X3301
R3362
C3359

1/2 PWB-G

PARTS LIST
REPLACEMENT PARTS

Replacement parts which have special safety characteristics are identified in this manual. Electrical components having such features are identified by ⚠ in the Replacement Parts list.
The use of a substitute replacement part which does not have the same safety characteristics as the factory recommended is not permitted. Replacement parts not shown in this service manual may create shock fire, or other hazards.

HOW TO ORDER REPLACEMENT PARTS

To have your order completed promptly and correctly please supply the following information.

1. MODEL NUMBER
2. REF. NO.
3. PART NO.
4. DESCRIPTION
5. CODE
6. QUANTITY

★ MARK: SPARE PARTS DELIVERY SECTION

REF. NO	PARTS	★	DESCRIPTION	CODE
			PICTURE TUBE	
⚠	VB76LPF3501*N	S	Flat Picture Tube 32" 16:9	**
⚠	RCILG0418BMZZ	S	Degaussing Coil 32" 16:9	AZ
⚠	RCILG0419BMZZ	S	Rotation Coil 16:9	AR
			PRINTED WIRING BOARDS (Not replacement item)	
PWB-A	DUNTK7246CJV7	S	Mother Unit 76EF19H	--
PWB-A	DUNTK7246CJV2	S	Mother Unit 76EF20H	--
PWB-B	DUNTK7244CJV3	S	Power Unit 76EF19H	--
PWB-B	DUNTK7244CJV2	S	Power Unit 76EF20H	--
PWB-C	DUNTK7249CJV4	S	Socket Unit 76EF19H	--
PWB-C	DUNTK7249CJV2	S	Socket Unit 76EF20H	--
PWB-D	DUNTK7247CJV3	S	100 Hz Unit 76EF19H	--
PWB-D	DUNTK7247CJV2	S	100 Hz Unit 76EF20H	--
PWB-E	DUNTK7224CJW3	S	A / V Unit 76EF19H	--
PWB-E	DUNTK7224CJW1	S	A / V Unit 76EF20H	--
PWB-F	DUNTK7245BMV3	S	Front A / V Unit 76EF19H	--
PWB-F	DUNTK7245BMV2	S	Front A / V Unit 76EF20H	--
PWB-G	DUNTK7250CJV1	S	Dolby Unit 76EF20H	--
PWB-H	DUNTK7251CJV1	S	Audio Unit 76EF20H	--
PWB-I	DUNTK7252BMV1	S	Speaker Unit (X2) 76EF20H	--
PWB-J	DUNTK7253BMV1	S	Speaker Unit (X3) 76EF20H	--
PWB-K	DUNTK7263BMV1	S	Audio Coils 76EF19H	--
PWB-K	DUNTK7263BMV2	S	Audio Coils 76EF20H	--
PWB-A			**MAIN UNIT**	
			TUNER	
TU 0201	RTUNH0135BMZZ	S	Tuner	BD
			INTEGRATED CIRCUITS	
IC 0201	RH-IX1612BMZZ	S	TDA6930X	AS
IC 0202	RH-IX1556BMZZ	S	BA10393 S0P8	AD
IC 0301	RH-IX1504BMZZ	S	MS 3410B-PP-F7	BG
IC 0330	VHITDA7480/-1	S	TDA7480	AK
IC 0331	VHITDA7480/-1	S	TDA7480	AK
IC 0350	VHIM5218L//-1	S	M5218L	AF
IC 0401	RH-IX1673BMZZ	S	SDA5273-2	BE
IC 0402	RH-IX1656BMZZ	S	DRAM	AY
IC 1001	RH-IX1629BMZZ	S	SAB-C161K-L16Q	AY
IC 1002	RH-IX1603BMZZ	S	NVM	AV
IC 1003	RH-IX0037CEZZ	S	UPC574J 33V	AD
IC 1004	CH-IX1642CJE2	S	PROM 76EF19H	AX
IC 1004.	CH-IX1642CJE1	S	PROM 76EF20H	AX
IC 1011	VHIPST529C2-1	S	PST529C	AD
IC.1014	RH-IX1603BMZZ	S	NVM	AV
IC 1702	RH-IX1641BMZZ	S	L4940V5	AH
			TRANSISTORS	
Q 0201	VS2SC2412KQ-1	S	2SC2412	AA
Q 0202	VS2SC2412KQ-1	S	2SC2412	AA
Q 0207	VS2SC2412KQ-1	S	2SC2412	AA
Q 0208	VS2SC2412KQ-1	S	2SC2412	AA
Q 0209	RH-TX0102BMZZ	S	BC338	AB
Q 0210	VS2SC2412KQ-1	S	2SC2412	AA
Q 0211	VS2SC2412KQ-1	S	2SC2412	AA
Q 0212	RH-TX0116BMZZ	S	TRANSISTOR	AC
Q 0215	VS2SC2412KQ-1	S	2SC2412	AA
Q 0315	VS2SA1037KQ-1	S	BC807	AA
Q 0316	VS2SC2412KQ-1	S	2SC2412	AA
Q 0317	VS2SA1037KQ-1	S	BC807	AA
Q 0318	VS2SC2412KQ-1	S	2SC2412	AA
Q 0370	VS2SC2412KQ-1	S	2SC2412	AA
Q 0372	VS2SC2412KQ-1	S	2SC2412	AA
Q 0373	VS2SC2412KQ-1	S	2SC2412	AA
Q 0374	VS2SA1037KQ-1	S	BC807	AA
Q 0401	VS2SC2412KQ-1	S	2SC2412	AA
Q 1001	VS2SC2412KQ-1	S	2SC2412	AA
Q 1012	VS2SC2412KQ-1	S	2SC2412	AA
Q 1013	VS2SC2412KQ-1	S	2SC2412	AA
			DIODES	
D 0202	RH-EX0551BMZZ	S	Zener TZMC9V1	AA
D 0203	RH-DX0551BMZZ	S	LL4148	AA
D 0206	RH-DX0560BMZZ	S	BA482	AB
D 0207	RH-DX0560BMZZ	S	BA482	AB
D 0317	RH-DX0551BMZZ	S	LL4148	AA
D 0318	RH-DX0551BMZZ	S	LL4148	AA
D 0356	RH-EX0402BMZZ	S	Zener BZX79C3V0	AB
D 0357	RH-EX0402BMZZ	S	Zener BZX79C3V0	AB
D 0372	RH-DX0551BMZZ	S	LL4148	AA
D 0405	RH-EX0550BMZZ	S	Zener TZMC8V2	AA
D 0412	RH-EX0545BMZZ	S	Zener TZMC5V1	AA
D 0413	RH-EX0548BMZZ	S	Zener TZMC6V8	AA
D 0418	RH-DX0551BMZZ	S	LL4148	AA
D 0419	RH-DX0551BMZZ	S	LL4148	AA
D 0420	RH-DX0551BMZZ	S	LL4148	AA
D 0421	RH-EX0537BMZZ	S	Zener TZMC2V4	AB
D 0422	RH-EX0537BMZZ	S	Zener TZMC2V4	AB
D 0423	RH-EX0537BMZZ	S	Zener TZMC2V4	AB
D 0424	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 0451	RH-EX0539BMZZ	S	Zener TZMC3V0	AA
D 0600	RH-DX0013GEZZ	S	Diode	AB
D 1001	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 1002	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 1005	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 1006	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 1007	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 1008	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 1009	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 1010	RH-DX0045BMZZ	S	1N4148	AA
			PACKADGED CIRCUITS	
X 0301	RCRSB0203BMZZ	S	Crystal 18.432 MHz	AG
X 0451	RCRSB0214BMZZ	S	Crystal 20.48 MHz	AH
X 1001	RCRSB0235BMZZ	S	Crystal 16 MHz	AF
			COILS	
L 0202	VP-DF100K0000	S	10μH	AB
L 0203	VP-CF470K0000	S	47μH	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
L 0205	RCILD0237BMZZ	S	Delay	AF
L 0206	VP-DF1R0M0000	S	1µH	AB
L 0301	VP-DF100K0000	S	10µH	AB
L 0330	VP-CF1R0M0000	S	1µH	AB
L 0331	VP-CF1R0M0000	S	1µH	AB
L 0332	VP-CF1R0M0000	S	1µH	AB
L 0333	VP-CF1R0M0000	S	1µH	AB
L 0334	RCILP0236BMZZ	S	100µH	AQ
L 0335	RCILP0236BMZZ	S	100µH	AQ
L 0336	RCILP0236BMZZ	S	100µH	AQ
L 0405	VP-DF100K0000	S	10µH	AB
L 0452	VP-DF3R3K0000	S	3.3µH	AB
CERAMIC FILTERS				
CF 0301	RFILC0020CEZZ	S	Filter 5.5 MHz	AE
SF 0201	RFILC0278BMZZ	S	SAW Filter K3953M	AM
SF 0202	RFILC0280BMZZ	S	SAW Filter K9260M	AL
SF 0203	RFILC0271BMZZ	S	Filter	AQ
SF 0204	RFILC0284BMZZ	S	Filter	AL
CAPACITORS				
C 0201	VCEAGA1HW105M	S	1 50V Electrolytic	AA
C 0202	VCEAGA1HW225M	S	2.2 50V Electrolytic	AB
C 0204	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 0206	VCEAGA1CW476M	S	47 16V Electrolytic	AB
C 0207	RC-FZ9105BMNJ	J	1 63V Mylar	AD
C 0208	VCCCTV1HH470J	S	47p 50V Ceramic	AA
C 0210	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0211	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0212	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0213	VCEAGA1CW476M	S	47 16V Electrolytic	AB
C 0214	VCEAGA0JW477M	S	470 6.3V Electrolytic	AB
C 0215	VCCCTV1HH270J	S	27p 50V Ceramic	AA
C 0216	VCCCTV1HH270J	S	27p 50V Ceramic	AA
C 0217	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0218	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0219	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 0220	VCEAGA1HW474M	S	0.47 50V Electrolytic	AA
C 0221	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0222	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 0229	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 0230	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0232	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0234	VCEAGA1HW225M	S	2.2 50V Electrolytic	AB
C 0238	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0239	VCCCTV1HH2R2C	S	2.2p 50V Ceramic	AA
C 0240	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0301	VCCCTV1HH5R0C	S	5p 50V Ceramic	AA
C 0302	VCCCTV1HH5R0C	S	5p 50V Ceramic	AA
C 0304	VCCCTV1HH470J	S	47p 50V Ceramic	AA
C 0306	VCCCTV1HH470J	S	47p 50V Ceramic	AA
C 0307	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0308	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0309	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 0311	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0312	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 0313	VCEAGA1AW337M	S	330 10V Electrolytic	AB
C 0314	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0315	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 0316	VCCCTV1HH471J	S	470p 50V Ceramic	AA
C 0317	VCEAGA1HW335M	S	3.3 50V Electrolytic	AA
C 0319	VCCCTV1HH471J	S	470p 50V Ceramic	AA
C 0320	VCCCTV1HH391J	S	390p 50V Ceramic	AA
C 0321	VCCCTV1HH391J	S	390p 50V Ceramic	AA
C 0322	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0323	VCEAGA0JW108M	S	1000 6.3V Electrolytic	AB
C 0324	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 0325	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 0326	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 0327	VCKYTV1HB102K	S	1000p 50V Ceramic	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
C 0341	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 0342	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 0350	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0351	VCEAGA1HW225M	S	2.2 50V Electrolytic	AB
C 0352	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 0354	VCEAGA1HW225M	S	2.2 50V Electrolytic	AB
C 0355	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 0356	VCEAGA1HW225M	S	2.2 50V Electrolytic	AB
C 0357	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0358	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 0359	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 0360	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0361	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0362	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 0363	RC-FZ9224BMNJ	J	0.22 63V Mylar	AC
C 0364	RC-FZ9224BMNJ	J	0.22 63V Mylar	AC
C 0365	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 0367	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 0368	VCKYTV1HB561K	S	560p 50V Ceramic	AA
C 0369	RC-FZ9474BMNJ	J	0.47 63V Mylar	AD
C 0370	VCE9GA1HW105M	S	1 50V Electrolytic (N/P)	
C 0372	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 0373	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0374	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 0375	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 0376	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0377	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0378	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 0379	VCEAGA1CW336M	S	33 16V Electrolytic	AA
C 0380	VCEAGA1EW337M	S	330 25V Electrolytic	AA
C 0382	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 0383	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 0384	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 0385	VCKYTV1HB561K	S	560p 50V Ceramic	AA
C 0386	RC-FZ9684BMNJ	J	0.68 63V Mylar	AD
C 0388	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 0389	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0401	RC-FZ9334BMNJ	J	0.33 63V Mylar	AC
C 0404	RC-FZ9334BMNJ	J	0.33 63V Mylar	AC
C 0405	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0417	VCEAGA1CW226M	S	22 16V Electrolytic	AA
C 0418	VCEAGA1CW226M	S	22 16V Electrolytic	AA
C 0451	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0452	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0453	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0454	VCKYTV1EF224Z	S	0.22 25V Ceramic	AA
C 0456	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0459	VCCCTV1HH220J	S	22p 50V Ceramic	AA
C 0460	VCCCTV1HH220J	S	22p 50V Ceramic	AA
C 0461	VCCCTV1HH220J	S	22p 50V Ceramic	AA
C 0471	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0732	VCEAGA0JW477M	S	470 6.3V Electrolytic	AB
C 0733	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0734	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0735	VCEAGA1CW107M	S	100 16V Electrolytic	AB
C 1001	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1002	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1003	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1005	VCEAGA0JW108M	S	1000 6.3V Electrolytic	AB
C 1006	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1007	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 1008	VCCCTV1HH220J	S	22p 50V Ceramic	AA
C 1009	VCCCTV1HH220J	S	22p 50V Ceramic	AA
C 1010	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1011	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 1012	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1013	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1014	VCCCTV1HH471J	S	470p 50V Ceramic	AA
C 1015	VCCCTV1HH820J	S	82p 50V Ceramic	AA
C 1016	VCCCTV1HH820J	S	82p 50V Ceramic	AA
C 1017	VCCCTV1HH221J	S	220p 50V Ceramic	AA
C 1018	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
C 1019	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 1020	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 1705	VCEAGA1CW107M	S	100 16V Electrolytic	AB
C 1706	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1707	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1708	VCEAGA0JW477M	S	470 6.3V Electrolytic	AB
C 1709	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 1710	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
			RESISTORS	
R 0156	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 0201	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 0202	VRS-TV1JD181J	S	180 1/10W Metal Oxide	AA
R 0203	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 0204	RR-XZ0112BMZZ	S	10 1/3W Fuse Resistor	AB
R 0205	VRS-TV1JD181J	S	180 1/10W Metal Oxide	AA
R 0206	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 0207	VRD-RA2BE121J	S	120 1/8W Carbon	AA
R 0208	VRD-RA2BE121J	S	120 1/8W Carbon	AA
R 0209	VRS-TV1JD183J	S	18K 1/10W Metal Oxide	AA
R 0210	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 0212	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 0213	VRS-TV1JD153J	S	15K 1/10W Metal Oxide	AA
R 0214	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 0215	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA
R 0218	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0219	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 0220	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA
R 0221	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA
R 0222	VRD-RA2BE473J	S	47K 1/8W Carbon	AA
R 0223	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 0224	RVR-M4624GEZZ	S	4.7K (Adjust)	AB
R 0225	VRS-TV1JD181J	S	180 1/10W Metal Oxide	AA
R 0226	RVR-M4628GEZZ	S	POT OHM MM V	AA
R 0231	VRS-TV1JD564J	S	560K 1/10W Metal Oxide	AA
R 0232	VRS-TV1JD470J	S	47 1/10W Metal Oxide	AA
R 0234	VRS-TV1JD821J	S	820 1/10W Metal Oxide	AA
R 0235	VRS-TV1JD563J	S	56K 1/10W Metal Oxide	AA
R 0236	VRS-TV1JD563J	S	56K 1/10W Metal Oxide	AA
R 0237	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 0238	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 0239	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 0240	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 0242	VRS-TV1JD151J	S	150 1/10W Metal Oxide	AA
R 0244	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 0245	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 0246	VRS-TV1JD683J	S	68K 1/10W Metal Oxide	AA
R 0247	VRS-TV1JD220J	S	22 1/10W Metal Oxide	AA
R 0248	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 0249	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA
R 0250	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 0251	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 0252	VRS-TV1JD470J	S	47 1/10W Metal Oxide	AA
R 0301	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0302	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0303	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0304	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0315	VRS-TV1JD821J	S	820 1/10W Metal Oxide	AA
R 0316	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0317	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0318	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 0319	VRS-TV1JD821J	S	820 1/10W Metal Oxide	AA
R 0320	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 0321	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 0322	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 0323	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 0330	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 0331	VRS-TV1JD103F	S	10K 1/10W Metal Oxide	AA
R 0332	VRS-TV1JD472F	S	4.7K 1/10W Metal Oxide	AA
R 0333	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 0334	VRS-TV1JD103F	S	10K 1/10W Metal Oxide	AA
R 0335	VRS-TV1JD472F	S	4.7K 1/10W Metal Oxide	AA
R 0336	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 0337	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 0338	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 0339	VRD-RA2BE104J	S	100K 1/8W Carbon	AA
R 0344	VRS-TQ2BD000J	S	Jumper	AA
R 0345	VRD-RA2HD151J	S	150 1/2W Carbon	AA
R 0354	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 0355	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0356	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 0357	VRS-TV1JD224J	S	220K 1/10W Metal Oxide	AA
R 0358	VRS-TV1JD224J	S	220K 1/10W Metal Oxide	AA
R 0359	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 0364	VRS-TQ2BD000J	S	Jumper	AA
R 0365	VRD-RA2HD151J	S	150 1/2W Carbon	AA
R 0372	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0374	VRS-TV1JD562J	S	5.6K 1/10W Metal Oxide	AA
R 0375	VRS-TV1JD392J	S	3.9K 1/10W Metal Oxide	AA
R 0376	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0377	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 0378	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 0379	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 0383	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0384	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 0432	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0433	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0447	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 0448	VRS-TV1JD152J	S	1.5K 1/10W Metal Oxide	AA
R 0449	VRD-RA2BE560J	S	56 1/8W Carbon	AA
R 0450	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 0454	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 0455	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 0457	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 0458	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 0459	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 0460	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 0463	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 0464	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA
R 0465	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA
R 0520	VRD-RA2BE222J	S	2.2K 1/8W Carbon	AA
R 1001	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 1002	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 1003	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 1004	VRS-TV1JD392J	S	3.9K 1/10W Metal Oxide	AA
R 1005	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1006	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 1007	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 1008	VRS-TV1JD182J	S	1.8K 1/10W Metal Oxide	AA
R 1010	VRS-TV1JD182J	S	1.8K 1/10W Metal Oxide	AA
R 1012	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1013	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1014	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1015	VRS-TV1JD221J	S	220 1/10W Metal Oxide	AA
R 1017	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1019	VRS-TV1JD822J	S	8.2K 1/10W Metal Oxide	AA
R 1020	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 1021	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 1023	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1024	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 1025	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 1026	VRS-TV1JD822J	S	8.2K 1/10W Metal Oxide	AA
R 1027	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1028	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1029	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 1030	VRD-RA2BE472J	S	4.7K 1/8W Carbon	AA
R 1031	VRS-TV1JD822J	S	8.2K 1/10W Metal Oxide	AA
R 1032	VRS-TV1JD822J	S	8.2K 1/10W Metal Oxide	AA
R 1033	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 1034	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 1036	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 1037	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 1038	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
R 1048	VRD-RA2HD273J	S	27K 1/2W Carbon	AA
R 1056	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 1072	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 1073	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 1701	VRS-VV3LB100J	S	10 3W Metal Oxide	AB

MISCELLANEOUS PARTS

REF. NO	PARTS	★	DESCRIPTION	CODE
	QSOCZ2051SC32	S	Socket 32 PIN	AC
FB 1002	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 1003	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 1004	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 1005	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 1006	RBLN-0037CEZZ	S	Ferrite Bead	AB
P 0301	QPLGN0341CEZZ	S	Connector	AA
P 0332	QPLGN0241CEZZ	S	Connector	AA
P 0334	QPLGN1141CEZZ	S	Connector	AC
P 0336	QPLGN1041CEZZ	S	Connector	AB
P 0401	QPLGN0441CEZZ	S	Connector 4pin	AB
P 0601	QPLGZ1338CEZZ	S		AE
P 0701	QPLGZ1040CEZZ	S		AE
P 0703	QPLGZ1338CEZZ	S		AE
SC 0201	QSOCN0284FJZZ	S	Socket 20pin	AG
SC 0607	QSOCN0284FJZZ	S	Socket 20pin	AG
SC 1001	QSOCN1067BMZZ	S	Connector	AE
SC 1003	QSOCN0284FJZZ	S	Socket 20pin	AG

PWB-B POWER UNIT

INTEGRATED CIRCUITS

REF. NO	PARTS	★	DESCRIPTION	CODE
IC 0501	VHILA7841//-1	S	LA7841	AN
IC 0601	RH-IX1556BMZZ	S	BA10393 S0P8	AD
IC 0602	VHILM358D//-1	S	LM358DR	AE
IC 0603	VHILM358D//-1	S	LM358DR	AE
⚠ IC 0701	RH-FX0106BMZZ	S	M0C8106SR2V	AD
IC 0703	RH-IX1641BMZZ	S	L4940V5	AH
IC 0751	RH-IX1646BMZZ	S	ST6203B	AL
IC 0752	VHIPST529C2-1	S	PST529C	AD
⚠ IC 0753	RH-FX0106BMZZ	S	M0C8106SR2V	AD
⚠ IC 0754	RH-FX0106BMZZ	S	M0C8106SR2V	AD
IC 0755	RH-IX1601BMZZ	S	O.P.C.	AH
⚠ IC 7001	RH-FX0106BMZZ	S	M0C8106SR2V	AD

TRANSISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
Q 0501	VS2SC2412KQ-1	S	2SC2412	AA
Q 0513	RH-TX0143BMZZ	S	BC557-B	AA
Q 0514	RH-TX0142BMZZ	S	BC547-B	AB
Q 0601	RH-TX0183BMZZ	S	BUH1015HI	AQ
Q 0602	RH-TX0162BMZZ	S	MJD44H11	AF
Q 0603	VS2SC2412KQ-1	S	2SC2412	AA
Q 0604	VS2SA1037KQ-1	S	BC807	AA
Q 0605	RH-TX0162BMZZ	S	MJD44H11	AF
Q 0608	VS2SC5022//1E	S	2SC5022	AG
Q 0609	RH-TX0142BMZZ	S	BC547-B	AB
Q 0701	RH-TX0184BMZZ	S	STH9NA80FI	AV
Q 0702	RH-TX0102BMZZ	S	BC338	AB
Q 0703	RH-TX0102BMZZ	S	BC338	AB
Q 0705	VS2SC2412KQ-1	S	2SC2412	AA
Q 0712	VS2SA1037KQ-1	S	BC807	AA
Q 0751	VS2SC2412KQ-1	S	2SC2412	AA
Q 0752	VS2SC2412KQ-1	S	2SC2412	AA
Q 7001	RH-TX0166BMZZ	S	2SK2605	AK
Q 7002	RH-TX0102BMZZ	S	BC338	AB
Q 7003	RH-TX0102BMZZ	S	BC338	AB
Q 7004	VS2SC2412KQ-1	S	2SC2412	AA
Q 7005	VS2SA1037KQ-1	S	BC807	AA
Q 7006	VS2SA1037KQ-1	S	BC807	AA
Q 7007	VS2SC2412KQ-1	S	2SC2412	AA
Q 7008	RH-TX0163BMZZ	S	MJD45H11	AF
Q 7009	VS2SA1037KQ-1	S	BC807	AA
Q 7010	RH-TX0162BMZZ	S	MJD44H11	AF

DIODES

REF. NO	PARTS	★	DESCRIPTION	CODE
D 0501	RH-DX0505BMZZ	S	1N4935	AB
D 0502	RH-EX0654CEZZ	S	Zener 60V	AE
D 0520	RH-EX0537BMZZ	S	Zener TZMC2V4	AB
D 0530	RH-DX0551BMZZ	S	LL4148	AA
D 0601	RH-DX0505BMZZ	S	1N4935	AB
D 0603	RH-DX0045BMZZ	S	1N4148	AA
D 0604	RH-DX0506BMZZ	S	1N4936	AB
D 0605	RH-DX0585BMZZ	S	DMV32AF5	AM
D 0607	RH-DX0505BMZZ	S	1N4935	AB
D 0609	RH-DX0589BMZZ	S	MBR3100RL	AF
D 0610	RH-DX0565BMZZ	S	1N5822RL	AD
D 0611	RH-DX0045BMZZ	S	1N4148	AA
D 0613	RH-DX0045BMZZ	S	1N4148	AA
D 0616	RH-DX0045BMZZ	S	1N4148	AA
D 0617	RH-DX0045BMZZ	S	1N4148	AA
D 0619	RH-DX0551BMZZ	S	LL4148	AA
D 0620	RH-DX0551BMZZ	S	LL4148	AA
D 0623	RH-DX0484CEZZ	S		AE
D 0624	RH-DX0045BMZZ	S	1N4148	AA
D 0625	RH-EX0437BMZZ	S	Zener 12V 1W	AC
D 0626	RH-EX0437BMZZ	S	Zener 12V 1W	AC
D 0627	RH-EX0431BMZZ	S	Zener BZX79C47V	AA
D 0628	RH-DX0506BMZZ	S	1N4936	AB
D 0629	RH-EX0478BMZZ	S	Zener 1N4732 (4V7)	AB
D 0630	RH-DX0519BMZZ	S	1N5819	AD
D 0640	RH-DX0551BMZZ	S	LL4148	AA
D 0641	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 0645	RH-DX0045BMZZ	S	1N4148	AA
D 0646	RH-DX0045BMZZ	S	1N4148	AA
D 0647	RH-DX0045BMZZ	S	1N4148	AA
D 0701	RH-DX0545BMZZ	S	1N5406 600V 3A	AD
D 0702	RH-DX0545BMZZ	S	1N5406 600V 3A	AD
D 0703	RH-DX0545BMZZ	S	1N5406 600V 3A	AD
D 0704	RH-DX0545BMZZ	S	1N5406 600V 3A	AD
D 0705	RH-DX0539BMZZ	S	BYT52M	AC
D 0706	RH-DX0045BMZZ	S	1N4148	AA
D 0707	RH-EX0411BMZZ	S	Zener BZX79C6V8	AA
D 0708	RH-DX0602BMZZ	S	MUR4100	AH
D 0709	RH-DX0505BMZZ	S	1N4935	AB
D 0710	RH-DX0587BMZZ	S	MR826	AP
D 0717	RH-EX0482BMZZ	S	Zener BZX79 B6V2	AA
D 0718	RH-EX0419BMZZ	S	Zener BZX79C15V 0.4W	AB
D 0719	RH-DX0587BMZZ	S	MR826	AP
D 0720	RH-DX0045BMZZ	S	1N4148	AA
D 0729	RH-DX0551BMZZ	S	LL4148	AA
D 0730	RH-DX0045BMZZ	S	1N4148	AA
D 0731	RH-DX0296CEZZ	S	ESAB92M-02	AG
D 0732	RH-DX0296CEZZ	S	ESAB92M-02	AG
D 0751	RH-DX0559BMZZ	S	BAS12	AC
D 0752	RH-DX0559BMZZ	S	BAS12	AC
D 0753	RH-DX0559BMZZ	S	BAS12	AC
D 0754	RH-EX0480BMZZ	S	Zener BZX79 B5V1	AA
D 0755	RH-DX0045BMZZ	S	1N4148	AA
D 0756	RH-DX0045BMZZ	S	1N4148	AA
D 0757	RH-DX0045BMZZ	S	1N4148	AA
D 0758	RH-PX0105BMZZ	S	LED	AC
D 0759	RH-PX0105BMZZ	S	LED	AC
D 7002	RH-DX0045BMZZ	S	1N4148	AA
D 7005	RH-DX0539BMZZ	S	BYT52M	AC
D 7006	RH-DX0551BMZZ	S	LL4148	AA
D 7007	RH-EX0409BMZZ	S	Zener BZX79C5V6	AA
D 7011	RH-DX0587BMZZ	S	MR826	AP
D 7018	RH-EX0419BMZZ	S	Zener BZX79C15V 0.4W	AB
D 7020	RH-DX0551BMZZ	S	LL4148	AA
D 7023	RH-DX0587BMZZ	S	MR826	AP
D 7024	RH-EX0584BMZZ	S	Zener TZMBC6V2	AA
D 7025	RH-EX0405BMZZ	S	Zener BZX79C3V9	AB

REF. NO	PARTS	★	DESCRIPTION	CODE
D 7026	RH-EX0558BMZZ	S	Zener TZMC18	AA
D 7027	RH-EX0539BMZZ	S	Zener TZMC3V0	AA
D 7028	RH-EX0558BMZZ	S	Zener TZMC18	AA
D 7029	RH-EX0539BMZZ	S	Zener TZMC3V0	AA
D 7030	RH-EX0417BMZZ	S	Zener BZX79C12V	AA
D 7031	RH-EX0558BMZZ	S	Zener TZMC18	AA

PACKADGED CIRCUITS

REF. NO	PARTS	★	DESCRIPTION	CODE
⚠PR 0701	RMPTP0028CEZZ	S	P.T.C.	AG

COILS

REF. NO	PARTS	★	DESCRIPTION	CODE
L 0602	RCILZ0719BMZZ	S	Linearity Coil	AN
L 0604	RCILP0263BMZZ	S	350µH	AG
L 0605	RCILP0272BMZZ	S	10mH	AG
L 0606	RCILP0243BMZZ	S	33µH	AD
L 0607	VP-CF3R3K0000	S	3.3µH	AB
L 0608	VP-CF3R3K0000	S	3.3µH	AB
L 0609	RCILP0265BMZZ	S	1.5µH	AD
⚠L 0700	RCILF0108BMZZ	S	Main Filter	AL
L 0701	RCILF0154CEZZ	S	Coil	AQ
L 0702	RCILP0110CEZZ	S	3.3µH	AD
L 0703	RCILP0110CEZZ	S	3.3µH	AD
L 0708	VP-CF1R0K0000	S	1µH	AB
L 0709	VP-CF1R0K0000	S	1µH	AB
L 0710	RCILP0213BMZZ	S	13.5µH	AF

CERAMIC FILTERS

REF. NO	PARTS	★	DESCRIPTION	CODE
CF 0751	RFILC0121GEZZ	S	Filter 8 MHz	AD

TRANSFORMERS

REF. NO	PARTS	★	DESCRIPTION	CODE
⚠T 0601	RTRNF2052BMZZ	S	F.B.T.	BV
⚠T 0602	RTRNZ0553BMZZ	S	Focus Transformer	AU
⚠T 0701	RTRNZ0566BMZZ	S	Chopper	AX
⚠T 7000	RTRNZ0548BMZZ	S	Dolby Power Transformer	AU

CAPACITORS

REF. NO	PARTS	★	DESCRIPTION	CODE
C 0501	VCEAGA1EW477M	S	470 25V Electrolytic	AD
C 0502	VCEAGA1EW477M	S	470 25V Electrolytic	AD
C 0503	RC-FZ0272CEZZ	S	0.39 100V Mylar	AD
C 0504	RC-FZ0272CEZZ	S	0.39 100V Mylar	AD
C 0505	RC-FZ9103BMNJ	J	0.01 63V Mylar	AB
C 0506	VCEAGA1HW107M	S	100 50V Electrolytic	AC
C 0521	VCKYTV1HB332K	S	3300p 50V Ceramic	AA
C 0527	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 0528	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0530	VCE9GA1CW106M	S	10 16V Electrolytic (N/P)	AC
C 0531	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 0535	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 0536	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 0601	VCFPPD3DA622H	S		AE
C 0603	RC-FZ9103BMNJ	J	0.01 63V Mylar	AB
C 0604	VCEAGA1AW108M	S	1000 10V Electrolytic	AC
C 0605	RC-FZ7224BMNJ	J	0.22 400V Mylar	AE
C 0606	RC-FZ7684BMNJ	J	0.68 400V Mylar	AH
C 0607	RC-FZ7824BMNJ	J	0.82 400V Mylar	AK
C 0609	VCEAGA2EW106M	S	10 250V Electrolytic	AD
C 0610	RC-FZ0159BMZZ	S	0.015 630V Mylar	AE
C 0616	VCEAGA1EW108M	S	1000 25V Electrolytic	AD
C 0618	VCEAGA1EW108M	S	1000 25V Electrolytic	AD
C 0619	VCEAGA1JW107M	S	100 63V Electrolytic	AB
C 0620	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 0623	VCFPVC3CA822H	S		AD
C 0624	RC-KZ0036CEZZ	S	330p 2KV Ceramic	AB
C 0625	RC-KZ0036CEZZ	S	330p 2KV Ceramic	AB
C 0626	VCEAGA2DW106M	S	10 200V Electrolytic	AD
C 0627	RC-KZ0052CEZZ	S		AC
C 0631	VCEAGA2CW105M	S	1 160V Electrolytic	AB
C 0632	RC-FZ8472BMNJ	S	4700p 630V Mylar	AC
C 0633	VCFPPD3DA682H	S		AE
C 0634	RC-FZ6474BMNJ	J	0.47 250V Mylar	AE
C 0640	VCCCTV1HH181J	S	180p 50V Ceramic	AA
C 0641	VCE9GA1HW335M	S	3.3 50V Electrolytic	AB
C 0643	RC-FZ9103BMNJ	J	0.01 63V Mylar	AB
C 0644	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0648	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0649	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0650	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 0700	RC-FZ0160BMZZ	S	0.47 275V Mylar	AF
C 0701	RC-KZ0029CEZZ	S	0.01 250V Ceramic	AC
C 0705	RC-FZ0156BMZZ	S	0.022 630V Mylar	AE
C 0706	RC-EZ0123BMZZ	S	470 385V Electrolytic	AW
C 0707	RC-FZ9153BMNJ	J	0.015 63V Mylar	AB
C 0708	RC-FZ9273BMNJ	J	0.027 63V Mylar	AB
C 0709	RC-FZ9332BMNJ	J	3300p 63V Mylar	AA
C 0710	RC-FZ9102BMNJ	J	1000p 63V Mylar	AB
C 0711	RC-EZ0399CEZZ	S		AA
C 0712	VCEAGA1CW477M	S	470 16V Electrolytic	AC
C 0713	VCEAGA1CW108M	S	1000 16V Electrolytic	AE
C 0717	RC-KZ0156CEZZ	S	3300p 4KV Ceramic	AD
C 0718	RC-KZ0038CEZZ	S	470p 2KV Ceramic	AB
C 0719	VCEAGA1EW228M	S	2200 25V Electrolytic	AG
C 0720	VCEAGA1EW228M	S	2200 25V Electrolytic	AG
C 0721	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 0722	RC-EZ0258CEZZ	S	100 200V Electrolytic	AH
C 0726	VCKYPA2HB331K	S	330p 500V Ceramic	AA
C 0728	VCCCPA1HH101J	S	100p 50V Ceramic	AA
C 0729	VCEAGA1AW477M	S	470 10V Electrolytic	AB
C 0730	VCEAGA1AW228M	S	2200 10V Electrolytic	AD
C 0739	RC-KZ0029CEZZ	S	0.01 250V Ceramic	AC
C 0740	RC-KZ0029CEZZ	S	0.01 250V Ceramic	AC
C 0742	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 0743	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 0751	VCEAGA1CW476M	S	47 16V Electrolytic	AB
C 0752	VCEAGA1AW107M	S	100 10V Electrolytic	AA
C 0753	VCEAGA1AW226M	S	22 10V Electrolytic	AA
C 0754	VCEAGA1CW226M	S	22 16V Electrolytic	AA
C 0755	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 0756	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 0757	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 0758	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 0759	VCEAGA1AW476M	S	47 10V Electrolytic	AA
C 7005	RC-KZ0029CEZZ	S	0.01 250V Ceramic	AC
C 7007	RC-FZ9153BMNJ	J	0.015 63V Mylar	AB
C 7008	RC-FZ9683BMNJ	J	0.068 63V Mylar	AB
C 7009	VCKYTV1HF333Z	S	0.033 50V Ceramic	AA
C 7010	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 7015	VCEAGA1EW228M	S	2200 25V Electrolytic	AG
C 7016	VCEAGA1EW228M	S	2200 25V Electrolytic	AG
C 7018	RC-KZ0035CEZZ	S	220p 2KV Ceramic	AC
C 7023	VCKYPA2HB471K	S	470p 500V Ceramic	AB
C 7025	RC-KZ0035CEZZ	S	220p 2KV Ceramic	AC
C 7026	VCKYPA1HB471K	S	470p 50V Ceramic	AA
C 7027	RC-FZ7104BMNJ	J	0.1 400V Mylar	AD
C 7029	VCEAGA1CW108M	S	1000 16V Electrolytic	AE
C 7030	VCKYPA2HB103K	S	0.01 500V Ceramic	AC

RESISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
R 0501	VRD-RA2BE821J	S	820 1/8W Carbon	AA
R 0502	VRD-RA2BE821J	S	820 1/8W Carbon	AA
R 0503	VRD-RA2BE392J	S	3.9K 1/8W Carbon	AA
R 0504	VRD-RA2BE272J	S	2.7K 1/8W Carbon	AA
R 0505	VRD-RA2BE272J	S	2.7K 1/8W Carbon	AA
R 0506	VRS-VV3LB151J	S	150 3W Metal Oxide	AB
R 0507	VRN-VV3DB1R0J	S	1 2W Metal Film	AA
R 0508	VRD-RA2HD1R0J	S	1 1/2W Carbon	AA
R 0537	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 0538	VRS-TV1JD122J	S	1.2K 1/10W Metal Oxide	AA
R 0541	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
R 0543	VRS-VV3AB101J	S	100 1W Metal Oxide	AA
R 0545	VRS-TV1JD154J	S	150K 1/10W Metal Oxide	AA
R 0551	VRD-RA2BE104J	S	100K 1/8W Carbon	AA
R 0554	VRD-RA2BE104J	S	100K 1/8W Carbon	AA
R 0555	VRD-RA2BE222J	S	2.2K 1/8W Carbon	AA
R 0557	VRD-RA2HD100J	S	10 1/2W Carbon	AA
R 0558	VRD-RA2BE471J	S	470 1/8W Carbon	AA
R 0559	VRS-VV3AB101J	S	100 1W Metal Oxide	AA
R 0560	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0561	VRD-RA2BE103J	S	10K 1/8W Carbon	AA
R 0562	VRS-TV1JD105J	S	1M 1/10W Metal Oxide	AA
R 0563	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 0601	VRD-RA2BE682J	S	6.8K 1/8W Carbon	AA
R 0602	VRD-RA2EE681J	S	680 1/4W Carbon	AA
R 0603	RR-XZ0206BMZZ	S	3.3 1/2W Fuse Resistor	AB
R 0604	VRN-VV3LB5R6J	S	5.6 3W Metal Film	AC
R 0605	VRD-RA2BE222J	S	2.2K 1/8W Carbon	AA
R 0606	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 0607	VRN-VV3ABR33J	S	0.33 1W Metal Film	AA
R 0608	VRN-VV3LB6R8J	S	6.8 3W Metal Film	AB
R 0609	VRN-VV3DB6R8J	S	6.8 2W Metal Film	AB
R 0610	VRS-VV3DB561J	S	560 2W Metal Oxide	AA
R 0618	VRD-RA2BE222J	S	2.2K 1/8W Carbon	AA
R 0619	VRS-VV3AB561J	S	560 1W Metal Oxide	AA
R 0620	VRS-VV3AB102J	S	1K 1W Metal Oxide	AB
R 0624	RR-XZ0200BMZZ	S	1 1/2W Fuse Resistor	AB
R 0625	VRD-RA2HD393J	S	39K 1/2W Carbon	AA
R 0627	VRD-RA2BE823J	S	82K 1/8W Carbon	AA
R 0634	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA
R 0635	VRD-RA2BE470J	S	47 1/8W Carbon	AA
R 0639	VRD-RA2BE823J	S	82K 1/8W Carbon	AA
R 0640	RR-XZ0208BMZZ	S	4.7 1/2W Fuse Resistor	AA
R 0641	VRD-RA2HD270J	S	27 1/2W Carbon	AA
R 0642	VRS-VV3LB104J	S	100K 3W Metal Oxide	AB
R 0643	VRS-VV3LB104J	S	100K 3W Metal Oxide	AB
R 0644	VRD-RA2BE332J	S	3.3K 1/8W Carbon	AA
R 0645	VRC-MA2HG333J	S		AB
R 0646	VRD-RA2BE103J	S	10K 1/8W Carbon	AA
R 0647	VRS-VV3AB181J	S	180 1W Metal Oxide	AA
R 0648	VRN-VV3LB1R5J	S	1.5 3W Metal Film	AB
R 0649	VRS-VV3LB561J	S	560 3W Metal Oxide	AA
R 0650	VRD-RA2BE104J	S	100K 1/8W Carbon	AA
R 0651	VRS-VV3DB222J	S	2.2K 2W Metal Oxide	AA
R 0652	VRD-RA2HD334J	S	330K 1/2W Carbon	AA
R 0653	VRD-RA2HD224J	S	220K 1/2W Carbon	AA
R 0655	VRD-RA2HD184J	S	180K 1/2W Carbon	AA
R 0656	VRD-RA2HD104J	S	100K 1/2W Carbon	AA
R 0657	VRS-TV1JD562J	S	5.6K 1/10W Metal Oxide	AA
R 0658	VRS-VV3DB222J	S	2.2K 2W Metal Oxide	AA
R 0659	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 0660	VRD-RA2BE103J	S	10K 1/8W Carbon	AA
R 0661	VRS-TV1JD393J	S	39K 1/10W Metal Oxide	AA
R 0662	VRS-TV1JD393J	S	39K 1/10W Metal Oxide	AA
R 0663	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 0664	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 0665	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0666	VRS-TV1JD823J	S	82K 1/10W Metal Oxide	AA
R 0667	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 0668	VRD-RA2BE333J	S	33K 1/8W Carbon	AA
R 0670	VRD-RA2HD273J	S	27K 1/2W Carbon	AA
R 0671	VRS-VV3LB104J	S	100K 3W Metal Oxide	AB
R 0673	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 0674	VRD-RA2HD331J	S	330 1/2W Carbon	AA
R 0675	VRD-RA2HD271J	S	270 1/2W Carbon	AA
R 0700	VRD-RA2HD104J	S	100K 1/2W Carbon	AA
R 0701	VRD-RA2HD104J	S	100K 1/2W Carbon	AA
R 0702	VRS-VV3LB153J	S	15K 3W Metal Oxide	AB
R 0703	VRD-RA2BE103J	S	10K 1/8W Carbon	AA
R 0704	VRD-RA2HD564J	S	560K 1/2W Carbon	AC
R 0705	VRD-RA2HD564J	S	560K 1/2W Carbon	AC
R 0706	VRN-VV3DBR18J	S	0.18 2W Metal Film	AB
R 0707	VRD-RA2BE221J	S	220 1/8W Carbon	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
R 0708	VRS-VV3AB820J	S	82 1W Metal Oxide	AA
R 0709	VRD-RA2BE330J	S	33 1/8W Carbon	AA
R 0710	VRD-RA2HD122J	S	1.2K 1/2W Carbon	AA
R 0714	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 0715	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 0716	VRS-TQ2BD473F	S	47K 1/8W Metal Oxide	AA
R 0717	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 0718	VRS-TQ2BD473F	S	47K 1/8W Metal Oxide	AA
R 0719	VRS-TV1JD152J	S	1.5K 1/10W Metal Oxide	AA
R 0720	VRD-RA2BE223J	S	22K 1/8W Carbon	AA
R 0721	VRC-UA2HG825K	S	8.2M 1/2W Solid	AA
R 0722	VRC-UA2HG825K	S	8.2M 1/2W Solid	AA
R 0723	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 0746	VRW-KQ41C4R7K	S	4.7 15W Cement	AE
R 0749	VRS-VV3LB153J	S	15K 3W Metal Oxide	AB
R 0751	VRS-VV3AB563J	S	56K 1W Metal Oxide	AA
R 0752	VRS-VV3AB563J	S	56K 1W Metal Oxide	AA
R 0753	VRD-RA2HD224J	S	220K 1/2W Carbon	AA
R 0754	VRD-RA2HD224J	S	220K 1/2W Carbon	AA
R 0755	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 0756	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0757	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 0758	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 0759	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 0760	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 0761	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 0762	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 0763	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 0764	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 0765	VRS-TV1JD473J	S	47K 1/10W Metal Oxide	AA
R 0766	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 0767	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 0768	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 0769	VRS-TV1JD182J	S	1.8K 1/10W Metal Oxide	AA
R 0770	VRS-TV1JD821J	S	820 1/10W Metal Oxide	AA
R 0771	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 0772	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0774	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0775	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 7001	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 7002	VRD-RA2HD224J	S	220K 1/2W Carbon	AA
R 7004	VRD-RA2HD564J	S	560K 1/2W Carbon	AC
R 7005	VRD-RA2HD564J	S	560K 1/2W Carbon	AC
R 7006	VRN-VV3ABR22J	S	0.22 1W Metal Film	AA
R 7007	VRS-TV1JD221J	S	220 1/10W Metal Oxide	AA
R 7008	VRD-RA2HD102J	S	1K 1/2W Carbon	AA
R 7009	VRD-RA2BE330J	S	33 1/8W Carbon	AA
R 7010	VRD-RA2HD102J	S	1K 1/2W Carbon	AA
R 7015	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 7017	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 7018	VRS-TV1JD562J	S	5.6K 1/10W Metal Oxide	AA
R 7020	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 7021	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 7022	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 7023	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 7024	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 7025	VRS-TV1JD181J	S	180 1/10W Metal Oxide	AA
R 7026	VRS-TV1JD822J	S	8.2K 1/10W Metal Oxide	AA
R 7027	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 7028	VRS-VV3AB180J	S	18 1W Metal Oxide	AA
R 7029	VRS-TV1JD181J	S	180 1/10W Metal Oxide	AA
R 7030	VRS-TV1JD822J	S	8.2K 1/10W Metal Oxide	AA
R 7031	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 7032	VRS-VV3AB180J	S	18 1W Metal Oxide	AA

MISCELLANEOUS PARTS

REF. NO	PARTS	★	DESCRIPTION	CODE
	QFSHD1009CEZZ	S	Fuse Holder	AA
	QFSHD1010CEZZ	S	Fuse Holder	AB
⚠F 0601	QFS-J2521CEZZ	S	Fuse 2.5A 125V	AD
⚠F 0602	QFS-J2521CEZZ	S	Fuse 2.5A 125V	AD
⚠F 0700	QFS-C3226CEZZ	S	Fuse 3.15A 250V	AE

REF. NO	PARTS	★	DESCRIPTION	CODE
⚠F 0702	QFS-J2521CEZZ	S	Fuse 2.5A 125V	AD
⚠F 0703	QFS-J2521CEZZ	S	Fuse 2.5A 125V	AD
⚠S 0700	QSW-P0600BMZZ	S	Power Switch	AL
S 0751	QSW-K0079GEZZ	S	Switch	AB
S 0752	QSW-K0079GEZZ	S	Switch	AB
S 0753	QSW-K0079GEZZ	S	Switch	AB
S 0754	QSW-K0079GEZZ	S	Switch	AB
RMC0751	RRMCU0228CEZZ	S	Remote Control Receiver	AH
LP 0701	RLAMP0001BMZZ	S	Neon	AC
FB 0601	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 0602	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 0701	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 0702	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 0703	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 0704	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 7001	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 7006	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 7008	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 7012	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 7013	RBLN-0037CEZZ	S	Ferrite Bead	AB
P 0501	QPLGN0160FJZZ	S	Connector	AD
P 0503	QPLGN0341CEZZ	S	Connector	AA
P 0601	QTIPM0017CEFM	S	TIP	AA
P 0603	QPLGN0241CEZZ	S	Connector	AA
P 0605	QPLGN0441CEZZ	S	Connector 4pin	AB
P 0705	QPLGN0304CEZZ	S	Connector	AB
P 0707	QPLGN0207CEZZ	S	Connector	AA
P 0709	QPLGN1041CEZZ	S	Connector	AB
SC 0601	QSOCZ1338CEZZ	S		AD
SC 0701	QSOCZ1040CEZZ	S		AC
SC 0703	QSOCZ1338CEZZ	S		AD

PWB-C SOCKET UNIT

INTEGRATED CIRCUITS

REF. NO	PARTS	★	DESCRIPTION	CODE
IC 0850	VHITDA6111Q-1	S	TDA6111Q	AQ
IC 0851	VHITDA6111Q-1	S	TDA6111Q	AQ
IC 0852	VHITDA6111Q-1	S	TDA6111Q	AQ

TRANSISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
Q 0851	VS2SA1246//1E	S	2SA1246	AC
Q 0854	RH-TX0142BMZZ	S	BC547-B	AB
Q 5401	RH-TX0142BMZZ	S	BC547-B	AB
Q 5403	RH-TX0142BMZZ	S	BC547-B	AB
Q 5404	RH-TX0142BMZZ	S	BC547-B	AB
Q 5405	RH-TX0142BMZZ	S	BC547-B	AB
Q 5406	RH-TX0143BMZZ	S	BC557-B	AA
Q 5407	VS2SA1837//-1	S	2SA1837	AF
Q 5408	VS2SC4793//-1	S	2SC4793	AF
Q 5409	RH-TX0111BMZZ	S	PH-2369	AB
Q 5415	RH-TX0142BMZZ	S	BC547-B	AB

DIODES

REF. NO	PARTS	★	DESCRIPTION	CODE
D 0851	RH-DX0045BMZZ	S	1N4148	AA
D 0852	RH-DX0045BMZZ	S	1N4148	AA
D 0853	RH-DX0045BMZZ	S	1N4148	AA
D 0854	RH-DX0045BMZZ	S	1N4148	AA
D 0855	RH-DX0045BMZZ	S	1N4148	AA
D 0861	RH-DX0501BMZZ	S	1N4004	AA
D 0862	RH-DX0501BMZZ	S	1N4004	AA
D 0863	RH-DX0501BMZZ	S	1N4004	AA
D 0864	RH-DX0045BMZZ	S	1N4148	AA
D 5403	RH-DX0045BMZZ	S	1N4148	AA
D 5404	RH-DX0501BMZZ	S	1N4004	AA
D 5405	RH-DX0501BMZZ	S	1N4004	AA
D 5408	RH-DX0045BMZZ	S	1N4148	AA
D 5409	RH-DX0045BMZZ	S	1N4148	AA
D 5410	RH-DX0045BMZZ	S	1N4148	AA

COILS

REF. NO	PARTS	★	DESCRIPTION	CODE
L 0863	RCILP0227CEZZ	S		AG
L 5401	VP-MK120K0000	S		AB

CAPACITORS

REF. NO	PARTS	★	DESCRIPTION	CODE
C 0850	VCEAGA1CW337M	S	330 16V Electrolytic	AC
C 0851	VCEAGA1CW476M	S	47 16V Electrolytic	AB
C 0852	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 0853	VCEAGA1CW108M	S	1000 16V Electrolytic	AE
C 0854	VCEAGA1CW107M	S	100 16V Electrolytic	AB
C 0861	VCCCPA1HH7R0D	S	7p 50V Ceramic	AA
C 0862	VCCCPA1HH7R0D	S	7p 50V Ceramic	AA
C 0863	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 0865	VCCCPA1HH7R0D	S	7p 50V Ceramic	AA
C 0868	VCEAGA2EW476M	S	47 250V Electrolytic	
C 0869	RC-KZ015JCEZZ	S	Ceramic	AC
C 0871	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 0874	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 0877	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 0880	VCFYAA2EA333K	J	0.033 250V Mylar	AE
C 0881	RC-FZ9472BMNJ	J	4700p 63V Mylar	AB
C 0882	VCFYAA2EA333K	J	0.033 250V Mylar	AE
C 0883	RC-FZ9472BMNJ	J	4700p 63V Mylar	AB
C 0884	VCFYAA2EA333K	J	0.033 250V Mylar	AE
C 0885	RC-FZ9472BMNJ	J	4700p 63V Mylar	AB
C 0887	VCEAGA1CW227M	S	220 16V Electrolytic	AC
C 5401	VCCCPA1HH6R0D	S	6p 50V Ceramic	AA
C 5402	RC-FZ9474BMNJ	J	0.47 63V Mylar	AD
C 5403	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 5404	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 5405	VCEAGA1EW476M	S	47 25V Electrolytic	AA
C 5406	VCCSPA1HL391J	S	390p 50V Ceramic	AA
C 5407	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 5408	VCKYPA2HB472K	S	4700p 500V Ceramic	AB
C 5409	VCKYPA1HB472K	S	4700p 50V Ceramic	AB
C 5410	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 5411	VCKZPA1HF103Z	S	0.01 50V Ceramic	AA
C 5412	VCEAGA1CW107M	S	100 16V Electrolytic	AB
C 5413	VCEAGA1CW107M	S	100 16V Electrolytic	AB
C 5414	VCEAGA2CW226M	S	22 160V Electrolytic	AD
C 5415	VCEAGA2CW226M	S	22 160V Electrolytic	AD
C 5417	VCCSPA2HL220K	S		AB

RESISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
R 0850	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0851	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0852	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0853	VRD-RA2BE223J	S	22K 1/8W Carbon	AA
R 0853	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 0856	VRD-RA2EE680J	S	68 1/4W Carbon	AA
R 0859	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 0861	VRD-RA2BE152J	S	1.5K 1/8W Carbon	AA
R 0862	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 0863	VRD-RA2BE222J	S	2.2K 1/8W Carbon	AA
R 0865	VRD-RA2BE332J	S	3.3K 1/8W Carbon	AA
R 0866	VRD-RA2BE222J	S	2.2K 1/8W Carbon	AA
R 0868	VRD-RA2BE222J	S	2.2K 1/8W Carbon	AA
R 0871	RVR-B5784CEZZ	S		AH
R 0872	VRD-RA2BE272J	S	2.7K 1/8W Carbon	AA
R 0875	VRD-RA2BE272J	S	2.7K 1/8W Carbon	AA
R 0876	VRD-RA2BE272J	S	2.7K 1/8W Carbon	AA
R 0877	VRD-RA2BE333J	S	33K 1/8W Carbon	AA
R 0878	VRD-RA2BE333J	S	33K 1/8W Carbon	AA
R 0879	VRD-RA2BE333J	S	33K 1/8W Carbon	AA
R 0880	VRS-VV3DB104J	S	100K 2W Metal Oxide	AB
R 0883	VRS-VV3DB104J	S	100K 2W Metal Oxide	AB
R 0884	VRS-VV3DB104J	S	100K 2W Metal Oxide	AB
R 0887	VRD-RA2BE152J	S	1.5K 1/8W Carbon	AA
R 0888	VRC-MA2HG561K	S		AB

REF. NO	PARTS	★	DESCRIPTION	CODE
R 0889	VRD-RA2BE152J	S	1.5K 1/8W Carbon	AA
R 0890	VRD-RA2BE123J	S	12K 1/8W Carbon	AA
R 0891	VRC-MA2HG561K	S		AB
R 0892	VRD-RA2BE152J	S	1.5K 1/8W Carbon	AA
R 0893	VRC-MA2HG224K	S		AB
R 0894	VRC-MA2HG561K	S		AB
R 0895	VRD-RA2BE392J	S	3.9K 1/8W Carbon	AA
R 0896	VRD-RA2BE122J	S	1.2K 1/8W Carbon	
R 0897	VRD-RA2BE334J	S	330 1/8W Carbon	AA
R 0899	RR-XZ0204BMZZ	S	2.2 1/2W Fuse Resistor	AB
R 5401	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 5402	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 5403	VRD-RA2BE471J	S	470 1/8W Carbon	AA
R 5404	VRD-RA2BE122J	S	1.2K 1/8W Carbon	
R 5405	VRD-RA2BE223J	S	22K 1/8W Carbon	AA
R 5406	VRD-RA2BE153J	S	15K 1/8W Carbon	AA
R 5407	VRD-RA2BE181J	S	180 1/8W Carbon	AA
R 5408	VRD-RA2BE151J	S	150 1/8W Carbon	AA
R 5409	VRD-RA2BE153J	S	15K 1/8W Carbon	AA
R 5410	VRD-RA2BE471J	S	470 1/8W Carbon	AA
R 5411	VRD-RA2BE390J	S	39 1/8W Carbon	AA
R 5412	VRD-RA2BE470J	S	47 1/8W Carbon	AA
R 5413	VRD-RA2BE220J	S	22 1/8W Carbon	AA
R 5414	VRD-RA2BE220J	S	22 1/8W Carbon	AA
R 5415	VRD-RA2BE122J	S	1.2K 1/8W Carbon	
R 5416	VRD-RA2BE683J	S	68K 1/8W Carbon	AA
R 5417	VRD-RA2BE123J	S	12K 1/8W Carbon	AA
R 5418	VRD-RA2BE683J	S	68K 1/8W Carbon	AA
R 5419	VRD-RA2BE122J	S	1.2K 1/8W Carbon	
R 5420	VRD-RA2EE560J	S	56 1/4W Carbon	AA
R 5421	VRD-RA2EE560J	S	56 1/4W Carbon	AA
R 5422	VRD-RA2EE2R7J	S	2.7 1/4W Carbon	AA
R 5423	VRD-RA2EE2R7J	S	2.7 1/4W Carbon	AA
R 5424	VRS-VV3DB221J	J	220 2W Metal Oxide	AA
R 5425	VRS-VV3AB471J	S	470 1W Metal Oxide	AA
R 5426	VRD-RA2BE561J	S	560 1/8W Carbon	AA
R 5427	VRD-RA2BE222J	S	2.2K 1/8W Carbon	AA
R 5428	VRD-RA2HD101J	S	100 1/2W Carbon	AA
R 5429	VRD-RA2BE183J	S	18K 1/8W Carbon	AA
R 5430	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 5431	RR-XZ0204BMZZ	S	2.2 1/2W Fuse Resistor	AB

MISCELLANEOUS PARTS

FB 0850	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 0851	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 0852	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 0861	RBLN-0037CEZZ	S	Ferrite Bead	AB
P 0853	QTIPM0017CEFM	S		AA
P 0855	QTIPM0017CEFM	S		AA
P 0861	QPLGN0541CEZZ	S	Connector	AB
P 0862	QPLGN0441CEZZ	S	Connector 4pin	AB
P 5401	QPLGN0341CEZZ	S	Connector	AA
P 5402	QPLGN0241CEZZ	S	Connector	AA
P 5403	QPLGN0341CEZZ	S	Connector	AA
⚠ SC 0861	QSOCV1012CEZZ	S	C.R.T. Socket	AG
⚠ SG 0860	QSPGC0015CEZZ	S	Spark gap	AC
⚠ SG 0861	QSPGC0015CEZZ	S	Spark gap	AC
⚠ SG 0862	QSPGC0015CEZZ	S	Spark gap	AC
⚠ SG 0863	QSPGC0015CEZZ	S	Spark gap	AC
⚠ SG 0864	QSPGC0015CEZZ	S	Spark gap	AC

PWB-D 100 Hz UNIT

INTEGRATED CIRCUITS

REF. NO	PARTS	★	DESCRIPTION	CODE
IC 6001	RH-IX1616BMZZ	S	VPC3200A	BH
IC 6002	RH-IX1625BMZZ	S	CIP3250A-PS-B1	BA
IC 6101	RH-IX1621BMZZ	S	SDA9290	AZ
IC 6102	RH-IX1666BMZZ	S	SDA9253	AA
IC 6103	RH-IX1666BMZZ	S	SDA9253	AA
IC 6104	RH-IX1617BMZZ	S	SDA9220	AX
IC 6105	RH-IX1619BMZZ	S	SDA9270	BE
IC 6201	RH-IX1620BMZZ	S	SDA9280	BD
IC 6202	RH-IX1626BMZZ	S	SDA9362	AZ
IC 6203	VHITDA4780/-1	S	TDA4780	AZ

TRANSISTORS

Q 6205	VS2SC2412KQ-1	S	2SC2412	AA
Q 6206	RH-TX0102BMZZ	S	BC338	AB
Q 6207	VS2SA1037KQ-1	S	BC807	AA
Q 6212	VS2SA1037KQ-1	S	BC807	AA
Q 6213	VS2SC2412KQ-1	S	2SC2412	AA
Q 6214	VS2SC2412KQ-1	S	2SC2412	AA
Q 6216	VS2SC2412KQ-1	S	2SC2412	AA

DIODES

D 6001	RH-EX0546BMZZ	S	Zener TZMC5V6	AA
D 6002	RH-EX0409BMZZ	S	Zener BZX79C5V6	AA
D 6251	RH-EX0554BMZZ	S	Zener TZMC12	AA
D 6252	RH-DX0551BMZZ	S	LL4148	AA
D 6253	RH-DX0551BMZZ	S	LL4148	AA
D 6254	RH-EX0547BMZZ	S	Zener TZMC6V2	AA
D 6255	RH-DX0551BMZZ	S	LL4148	AA
D 6256	RH-DX0551BMZZ	S	LL4148	AA
D 6257	RH-EX0554BMZZ	S	Zener TZMC12	AA
D 6258	RH-DX0551BMZZ	S	LL4148	AA
D 6259	RH-EX0550BMZZ	S	Zener TZMC8V2	AA
D 6260	RH-DX0551BMZZ	S	LL4148	AA
D 6261	RH-DX0551BMZZ	S	LL4148	AA
D 6263	RH-DX0551BMZZ	S	LL4148	AA
D 6264	RH-DX0551BMZZ	S	LL4148	AA

PACKADGED CIRCUITS

X 6001	RCRSB0219BMZZ	S	Crystal 20.25 MHz	AH
X 6101	RCRSB0234BMZZ	S	Crystal 6.75 MHz	AG
X 6201	RCRSB0224BMZZ	S	Crystal 12 MHz	AK

COILS

L 6001	VP-NM2R2MR16N	S	2.2μH	AC
L 6002	VP-NM2R2MR16N	S	2.2μH	AC
L 6003	VP-NM3R3MR19N	S	3.3μH	AC
L 6004	VP-NM3R3MR19N	S	3.3μH	AC
L 6005	VP-NM3R3MR19N	S	3.3μH	AC
L 6006	VP-NM3R3MR19N	S	3.3μH	AC
L 6007	VP-NM3R3MR19N	S	3.3μH	AC
L 6008	VP-NM3R3MR19N	S	3.3μH	AC
L 6009	VP-NM3R3MR19N	S	3.3μH	AC
L 6010	VP-NM3R3MR19N	S	3.3μH	AC
L 6011	VP-NM100KR42N	S	10μH	AC
L 6013	VP-NM3R3MR19N	S	3.3μH	AC
L 6014	VP-NM3R3MR19N	S	3.3μH	AC
L 6017	VP-NM1R0MR10N	S	1μH	AB
L 6101	VP-NM100KR42N	S	10μH	AC
L 6102	VP-NM3R3MR19N	S	3.3μH	AC
L 6103	VP-NM100KR42N	S	10μH	AC
L 6104	VP-NM100KR42N	S	10μH	AC
L 6201	RCILP0265BMZZ	S	1.5μH	AD
L 6202	VP-NM1R0MR10N	S	1μH	AB
L 6203	VP-NM1R0MR10N	S	1μH	AB
L 6204	VP-NM1R0MR10N	S	1μH	AB
L 6205	VP-NM100KR42N	S	10μH	AC
L 6206	VP-NM100KR42N	S	10μH	AC
L 6207	VP-NM100KR42N	S	10μH	AC
L 6211	VP-NM100KR42N	S	10μH	AC
L 6212	VP-NM1R0MR10N	S	1μH	AB
L 6213	VP-NM100KR42N	S	10μH	AC
L 6251	VP-NM3R3MR19N	S	3.3μH	AC
L 6252	VP-NM100KR42N	S	10μH	AC

REF. NO	PARTS	★	DESCRIPTION	CODE
			CERAMIC FILTERS	
FB 6107	RFILN0001TAZZ	S	Filter	AE
FB 6330	RFILN0001TAZZ	S	Filter	AE
FB 6331	RFILN0001TAZZ	S	Filter	AE
FB 6332	RFILN0001TAZZ	S	Filter	AE
			CAPACITORS	
C 6001	VCCCTV1HH470J	S	47p 50V Ceramic	AA
C 6002	VCCCTV1HH680J	S	68p 50V Ceramic	AA
C 6003	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 6004	VCKYTV1EF334Z	S	0.33 25V Ceramic	AB
C 6005	VCCCTV1HH330J	S	33p 50V Ceramic	AA
C 6006	VCCCTV1HH470J	S	47p 50V Ceramic	AA
C 6007	VCCCTV1HH391J	S	390p 50V Ceramic	AA
C 6008	VCCCTV1HH680J	S	68p 50V Ceramic	AA
C 6009	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 6010	VCCCTV1HH391J	S	390p 50V Ceramic	AA
C 6011	VCCCTV1HH3R3C	S	3.3p 50V Ceramic	AA
C 6012	VCCCTV1HH3R3C	S	3.3p 50V Ceramic	AA
C 6013	VCEAGA0JW477M	S	470 6.3V Electrolytic	AB
C 6014	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6015	VCEAGA0JW477M	S	470 6.3V Electrolytic	AB
C 6016	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6017	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 6018	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 6019	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6020	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6021	VCKYTV1HF473Z	S	0.047 50V Ceramic	AA
C 6022	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6023	VCEAGA1HW105M	S	1 50V Electrolytic	AA
C 6025	VCEAGA1HW105M	S	1 50V Electrolytic	AA
C 6026	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6027	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6028	VCEAGA1HW105M	S	1 50V Electrolytic	AA
C 6029	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6030	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6031	VCKYTV1EF334Z	S	0.33 25V Ceramic	AB
C 6032	VCEAGA0JW477M	S	470 6.3V Electrolytic	AB
C 6033	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6034	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6035	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6036	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6037	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6039	VCEAGA0JW107M	S	100 6.3V Electrolytic	AA
C 6040	VCCCTV1HH680J	S	68p 50V Ceramic	AA
C 6101	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6102	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6103	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6104	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6105	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6106	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6107	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6108	VCEAGA0JW107M	S	100 6.3V Electrolytic	AA
C 6109	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6110	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6111	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6112	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6113	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6114	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6115	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6116	VCEAGA1AW107M	S	100 10V Electrolytic	AA
C 6117	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6118	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 6119	VCKYTV1HB152K	S	1500p 50V Ceramic	AA
C 6120	VCEAGA1AW227M	S	220 10V Electrolytic	AB
C 6121	VCCCTV1HH330J	S	33p 50V Ceramic	AA
C 6122	VCCCTV1HH330J	S	33p 50V Ceramic	AA
C 6123	VCCCTV1HH150J	S	15p 50V Ceramic	AA
C 6125	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6126	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6201	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6202	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6203	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6204	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6205	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 6206	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6209	VCEAGA0JW476M	S	47 6.3V Electrolytic	AA
C 6210	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6211	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6212	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6213	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6214	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6215	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6218	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 6219	VCCCTV1HH121J	S	120p 50V Ceramic	AA
C 6221	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 6224	VCCCTV1HH221J	S	220p 50V Ceramic	AA
C 6227	VCCCTV1HH221J	S	220p 50V Ceramic	AA
C 6229	VCKYTV1HF223Z	S	0.022 50V Ceramic	AA
C 6230	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6231	VCKYTV1HF223Z	S	0.022 50V Ceramic	AA
C 6234	VCKYTV1HF224Z	S	0.22 50V Ceramic	AA
C 6235	VCKYTV1HF224Z	S	0.22 50V Ceramic	AA
C 6236	VCKYTV1HF224Z	S	0.22 50V Ceramic	AA
C 6245	VCCCTV1HH270J	S	27p 50V Ceramic	AA
C 6246	VCCCTV1HH270J	S	27p 50V Ceramic	AA
C 6247	VCKYTV1HB152K	S	1500p 50V Ceramic	AA
C 6248	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 6249	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6250	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6251	VCKYTV1HF473Z	S	0.047 50V Ceramic	AA
C 6252	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6253	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6254	VCKYTV1HF223Z	S	0.022 50V Ceramic	AA
C 6256	VCKYTV1HF224Z	S	0.22 50V Ceramic	AA
C 6257	VCKYTV1HF224Z	S	0.22 50V Ceramic	AA
C 6258	VCKYTV1HF224Z	S	0.22 50V Ceramic	AA
C 6259	VCEAGA1HW105M	S	1 50V Electrolytic	AA
C 6260	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6261	VCEAGA1HW475M	S	4.7 50V Electrolytic	AC
C 6262	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 6263	VCEAGA1AW477M	S	470 10V Electrolytic	AB
C 6264	VCCCTV1HH220J	S	22p 50V Ceramic	AA
C 6265	VCCCTV1HH220J	S	22p 50V Ceramic	AA
C 6266	VCCCTV1HH220J	S	22p 50V Ceramic	AA
C 6267	VCEAGA1HW335M	S	3.3 50V Electrolytic	AA
C 6268	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6269	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6270	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6276	VCEAGA1CW226M	S	22 16V Electrolytic	AA
C 6278	VCEAGA1CW226M	S	22 16V Electrolytic	AA
C 6279	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6280	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6281	VCEAGA1CW106M	S	10 16V Electrolytic	AA
C 6282	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 6283	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 6285	VCCCTV1HH121J	S	120p 50V Ceramic	AA
C 6286	VCKYTV1HF223Z	S	0.022 50V Ceramic	AA
C 6287	VCCCTV1HH121J	S	120p 50V Ceramic	AA
C 6288	VCCCTV1HH560J	S	56p 50V Ceramic	AA
C 6289	VCCCTV1HH220J	S	22p 50V Ceramic	AA
			RESISTORS	
R 6004	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6011	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6012	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6013	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 6015	VRS-TV1JD182J	S	1.8K 1/10W Metal Oxide	AA
R 6017	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6018	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6019	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
R 6020	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6107	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6108	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6109	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6110	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6111	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6112	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6113	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6114	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6115	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6116	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6117	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6118	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6119	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6120	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6121	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6122	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6123	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6124	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6125	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6126	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6127	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6128	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6129	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6130	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6131	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6132	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6133	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6134	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6135	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6136	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6137	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6138	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6139	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6140	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6141	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6142	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6143	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6144	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6145	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6146	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6147	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6148	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6149	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6150	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6151	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6152	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6153	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6154	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6156	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6157	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6158	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6159	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6160	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6201	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6202	VRS-TV1JD133J	S	13K 1/10W Metal Oxide	AA
R 6203	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 6204	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 6205	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 6206	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 6207	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 6208	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 6209	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 6210	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 6211	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 6214	VRS-TV1JD750J	S	75 1/10W Metal Oxide	AA
R 6224	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 6225	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6226	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA
R 6227	VRS-TV1JD221J	S	220 1/10W Metal Oxide	AA
R 6228	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 6229	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
R 6230	VRS-TV1JD562J	S	5.6K 1/10W Metal Oxide	AA
R 6231	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6232	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 6233	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 6234	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 6235	VRS-TV1JD000J	S	0 1/10 Metal Oxide	AA
R 6236	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 6237	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 6239	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA
R 6240	VRS-TV1JD151J	S	150 1/10W Metal Oxide	AA
R 6242	VRS-TV1JD392J	S	3.9K 1/10W Metal Oxide	AA
R 6243	VRS-TV1JD392J	S	3.9K 1/10W Metal Oxide	AA
R 6247	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 6248	VRS-TV1JD124J	S	120K 1/10W Metal Oxide	AA
R 6249	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6251	VRS-TV1JD392J	S	3.9K 1/10W Metal Oxide	AA
R 6253	VRS-TV1JD332J	S	3.3K 1/10W Metal Oxide	AA
R 6254	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6255	VRS-TV1JD331J	S	330 1/10W Metal Oxide	AA
R 6256	VRS-TV1JD683J	S	68K 1/10W Metal Oxide	AA
R 6257	VRS-TV1JD152J	S	1.5K 1/10W Metal Oxide	AA
R 6258	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6259	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6260	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6261	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 6262	VRS-TV1JD392J	S	3.9K 1/10W Metal Oxide	AA
R 6263	VRS-TV1JD273J	S	27K 1/10 Metal Oxide	AA
R 6264	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6265	VRS-TV1JD182J	S	1.8K 1/10W Metal Oxide	AA
R 6267	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6268	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 6269	VRS-TV1JD393J	S	39K 1/10W Metal Oxide	AA
R 6270	VRS-TV1JD393J	S	39K 1/10W Metal Oxide	AA
R 6271	VRS-TV1JD393J	S	39K 1/10W Metal Oxide	AA
R 6272	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 6273	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6274	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6275	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6276	VRS-TV1JD683J	S	68K 1/10W Metal Oxide	AA
R 6277	VRS-TV1JD151J	S	150 1/10W Metal Oxide	AA
R 6278	VRS-TV1JD151J	S	150 1/10W Metal Oxide	AA
R 6279	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6280	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6281	VRS-TV1JD333J	S	33K 1/10W Metal Oxide	AA
R 6282	VRS-TV1JD333J	S	33K 1/10W Metal Oxide	AA
R 6283	VRS-TV1JD682J	S	6.8K 1/10W Metal Oxide	AA
R 6284	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 6285	VRS-TV1JD152J	S	1.5K 1/10W Metal Oxide	AA
R 6286	VRS-TV1JD132J	S	1.3K 1/10W Metal Oxide	AA
R 6287	VRS-TV1JD122J	S	1.2K 1/10W Metal Oxide	AA
R 6288	VRS-TV1JD151J	S	150 1/10W Metal Oxide	AA
R 6289	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 6291	VRS-TV1JD820J	S	82 1/10W Metal Oxide	AA
R 6293	VRS-TV1JD221J	S	220 1/10W Metal Oxide	AA
R 6294	VRS-TV1JD151J	S	150 1/10W Metal Oxide	AA
R 6295	VRS-TV1JD155J	S	1.5M 1/10W Metal Oxide	AA
R 6296	VRS-TV1JD155J	S	1.5M 1/10W Metal Oxide	AA
R 6297	VRS-TV1JD562J	S	5.6K 1/10W Metal Oxide	AA
R 6298	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 6301	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 6303	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 6305	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
MISCELLANEOUS PARTS				
FB 6005	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6100	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6101	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6102	RCORF0003GEZZ	S	Ferrite	AC
FB 6103	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6104	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6106	RBLN-0039TAZZ	S	Ferrite Bead	AB

REF. NO	PARTS	★	DESCRIPTION	CODE
FB 6301	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6302	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6303	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6304	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6305	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6306	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6307	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6308	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6309	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6310	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6311	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6312	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6313	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6314	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6315	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6316	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6317	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6318	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6319	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6320	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6321	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6322	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6323	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6324	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6325	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6326	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6327	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6328	RBLN-0039TAZZ	S	Ferrite Bead	AB
FB 6329	RBLN-0039TAZZ	S	Ferrite Bead	AB
P 6001	QPLGN0542CEZZ	S	Connector	AB
P 6002	QPLGN0342CEZZ	S	Connector	AB
P 6003	QPLGN0442CEZZ	S	Connector	AB
P 6004	QPLGN0285FJZZ	S	Connector	AG
P 6005	QPLGN0285FJZZ	S	Connector	AG
P 6006	QPLGN1142CEZZ	S	Connector	AD

PWB-E A / V UNIT

INTEGRATED CIRCUITS

REF. NO	PARTS	★	DESCRIPTION	CODE
IC 2401	RH-IX1623BMZZ	S	TDA6920X	AN
IC 2402	RH-IX1623BMZZ	S	TDA6920X	AN
IC 2403	RH-IX1624BMZZ	S	TEA6420	AP
IC 2404	VHIBA10339F-1	S	BA10339	AC

TRANSISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
Q 2438	VS2SC2412KQ-1	S	2SC2412	AA
Q 2440	VS2SC2412KQ-1	S	2SC2412	AA
Q 2441	VS2SC2412KQ-1	S	2SC2412	AA
Q 2447	VS2SC2412KQ-1	S	2SC2412	AA
Q 2450	VS2SC2412KQ-1	S	2SC2412	AA
Q 2451	VS2SC2412KQ-1	S	2SC2412	AA

DIODES

REF. NO	PARTS	★	DESCRIPTION	CODE
D 2408	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2409	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2410	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2411	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2412	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2413	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2414	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2415	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2416	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2417	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2418	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2419	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2420	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2421	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2422	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2423	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2424	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2425	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2426	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2427	RH-EX0401BMZZ	S	Zener BZX79C2V7	AA
D 2428	RH-EX0408BMZZ	S	Zener BZX79C5V1	AB
D 2429	RH-EX0408BMZZ	S	Zener BZX79C5V1	AB
D 2430	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2431	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2432	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2433	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2434	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2435	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 2437	RH-EX0417BMZZ	S	Zener BZX79C12V	AA
D 3312	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB
D 3313	RH-EX0413BMZZ	S	Zener BZX79C8V2	AB

COILS

REF. NO	PARTS	★	DESCRIPTION	CODE
L 2401	VP-DF100K0000	S	10μH	AB

CAPACITORS

REF. NO	PARTS	★	DESCRIPTION	CODE
C 2418	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2419	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2420	RC-FZ9473BMNJ	J	0.047 63V Mylar	AC
C 2421	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 2422	VCKYTV1HB473K	S	0.047 50V Ceramic	AA
C 2423	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 2424	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 2425	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 2426	VCEAEA1CW226M	S	22 16V Electrolytic	AB
C 2427	VCCCTV1HH221J	S	220p 50V Ceramic	AA
C 2428	VCCCTV1HH221J	S	220p 50V Ceramic	AA
C 2429	VCCCTV1HH221J	S	220p 50V Ceramic	AA
C 2436	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2437	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 2438	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2439	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 2440	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 2441	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2442	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 2443	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 2444	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 2445	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2446	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2447	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 2448	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 2449	VCCCTV1HH471J	S	470p 50V Ceramic	AA
C 2450	VCCCTV1HH471J	S	470p 50V Ceramic	AA
C 2451	VCEAEA1CW476M	S	47 16V Electrolytic	AB
C 2452	VCEAEA1CW476M	S	47 16V Electrolytic	AB
C 2453	VCCCTV1HH560J	S	56p 50V Ceramic	AA
C 2454	VCCCTV1HH560J	S	56p 50V Ceramic	AA
C 2455	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 2456	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 2457	VCEAEA1CW106M	S	10 16V Electrolytic	AB
C 2458	VCEAEA1CW106M	S	10 16V Electrolytic	AB
C 2459	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 2460	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 2461	VCCCTV1HH471J	S	470p 50V Ceramic	AA
C 2462	VCCCTV1HH471J	S	470p 50V Ceramic	AA
C 2463	VCEAEA1CW476M	S	47 16V Electrolytic	AB
C 2464	VCEAEA1CW476M	S	47 16V Electrolytic	AB
C 2465	VCCCTV1HH560J	S	56p 50V Ceramic	AA
C 2466	VCCCTV1HH560J	S	56p 50V Ceramic	AA
C 2467	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 2468	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 2469	VCEAEA1CW106M	S	10 16V Electrolytic	AB
C 2470	VCEAEA1CW106M	S	10 16V Electrolytic	AB
C 2471	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 2472	VCCCTV1HH331J	S	330p 50V Ceramic	AA
C 2473	VCCCTV1HH471J	S	470p 50V Ceramic	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
C 2474	VCCCTV1HH471J	S	470p 50V Ceramic	AA
C 2475	VCEAEA1CW476M	S	47 16V Electrolytic	AB
C 2476	VCEAEA1CW476M	S	47 16V Electrolytic	AB
C 2477	VCCCTV1HH560J	S	56p 50V Ceramic	AA
C 2478	VCCCTV1HH560J	S	56p 50V Ceramic	AA
C 2479	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 2480	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 2481	VCEAEA1CW106M	S	10 16V Electrolytic	AB
C 2482	VCEAEA1CW106M	S	10 16V Electrolytic	AB
C 2483	VCEAEA1CW226M	S	22 16V Electrolytic	AB
C 2484	VCEAEA1CW107M	S	100 16V Electrolytic	AB
C 2485	VCEAEA1CW107M	S	100 16V Electrolytic	AB
C 2486	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2487	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 2488	VCKYTV1HF103Z	S	0.01 50 Ceramic	AA
C 2490	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 2491	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 2492	VCKYTV1HB392K	S	3900 50 Ceramic	AA
C 2493	RC-FZ9224BMNJ	J	0.22 63V Mylar	AC
C 2494	VCKYTV1HF473Z	S	0.047 50V Ceramic	AA
C 2495	VCKYTV1HF473Z	S	0.047 50V Ceramic	AA
C 2496	VCKYTV1HF473Z	S	0.047 50V Ceramic	AA
C 2497	VCCSTV1HL101J	S	100p 50V Ceramic	AA
C 2498	VCCSTV1HL101J	S	100p 50V Ceramic	AA
C 2499	VCCSTV1HL101J	S	100p 50V Ceramic	AA
C 3324	VCEAEA1CW106M	S	10 16V Electrolytic	AB
C 3325	VCEAEA1CW106M	S	10 16V Electrolytic	AB
C 3326	VCCSTV1HL101J	S	100p 50V Ceramic	AA
C 3327	VCCSTV1HL101J	S	100p 50V Ceramic	AA
RESISTORS				
R 2425	VRS-TV1JD152J	S	1.5K 1/10W Metal Oxide	AA
R 2426	VRD-RA2BE152J	S	1.5K 1/8W Carbon	AA
R 2427	VRD-RA2HD680J	S	68 1/2W Carbon	AA
R 2428	VRD-RA2EE820J	S	82 1/4W Carbon	AA
R 2429	VRD-RA2BE103J	S	10K 1/8W Carbon	AA
R 2430	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2431	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2432	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 2433	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 2434	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2435	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA
R 2436	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA
R 2437	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 2438	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2439	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2440	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2441	VRD-RA2BE471J	S	470 1/8W Carbon	AA
R 2442	VRD-RA2BE471J	S	470 1/8W Carbon	AA
R 2443	VRD-RA2BE471J	S	470 1/8W Carbon	AA
R 2444	VRD-RA2EE820J	S	82 1/4W Carbon	AA
R 2445	VRD-RA2EE820J	S	82 1/4W Carbon	AA
R 2446	VRD-RA2EE820J	S	82 1/4W Carbon	AA
R 2447	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 2448	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 2449	VRD-RA2EE820J	S	82 1/4W Carbon	AA
R 2450	VRD-RA2EE820J	S	82 1/4W Carbon	AA
R 2451	VRD-RA2BE102J	S	1K 1/8W Carbon	AA
R 2452	VRD-RA2BE103J	S	10K 1/8W Carbon	AA
R 2453	VRD-RA2BE103J	S	10K 1/8W Carbon	AA
R 2454	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2455	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2456	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2457	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2458	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2459	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2460	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2461	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA
R 2462	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2463	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2464	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2465	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2466	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2467	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2468	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2469	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2470	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2471	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2472	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2473	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2474	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2475	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2476	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2477	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2478	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2479	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2480	VRS-TV1JD471J	S	470 1/10W Metal Oxide	AA
R 2481	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2482	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2483	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2484	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2485	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2486	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2487	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2488	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2489	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2490	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 2491	VRD-RA2BE101J	S	100 1/8W Carbon	AA
R 2493	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2497	VRD-RA2EE4R7J	S	4.7 1/4W Carbon	AA
R 2498	VRD-RA2EE4R7J	S	4.7 1/4W Carbon	AA
R 2499	VRD-RA2EE4R7J	S	4.7 1/4W Carbon	AA
R 2500	VRD-RA2BE562J	S	5.6K 1/8W Carbon	AA
R 2501	VRD-RA2BE562J	S	5.6K 1/8W Carbon	AA
R 2503	VRD-RA2BE562J	S	5.6K 1/8W Carbon	AA
R 2504	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 2505	VRD-RA2BE472J	S	4.7K 1/8W Carbon	AA
R 2506	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 2507	VRS-TV1JD271J	S	270 1/10W Metal Oxide	AA
R 2509	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2510	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2511	VRD-RA2BE472J	S	4.7K 1/8W Carbon	AA
R 2512	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 2513	VRD-RA2BE183J	S	18K 1/8W Carbon	AA
R 2514	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 2515	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2516	VRD-RA2HD680J	S	68 1/2W Carbon	AA
R 2517	VRD-RA2BE103J	S	10K 1/8W Carbon	AA
R 2518	VRD-RA2EE820J	S	82 1/4W Carbon	AA
R 2519	VRD-RA2HD680J	S	68 1/2W Carbon	AA
R 2520	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 2521	VRD-RA2EE820J	S	82 1/4W Carbon	AA
R 2522	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 2523	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 2524	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 2525	RR-XZ0104BMZZ	S	2.2 1/3W Fuse Resistor	AB
R 2550	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 2551	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 3336	VRS-TV1JD564J	S	560K 1/10W Metal Oxide	AA
R 3337	VRS-TV1JD564J	S	560K 1/10W Metal Oxide	AA
R 3338	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
R 3339	VRS-TV1JD102J	S	1K 1/10W Metal Oxide	AA
MISCELLANEOUS PARTS				
FB 2401	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 2402	RBLN-0037CEZZ	S	Ferrite Bead	AB
FB 2403	RBLN-0037CEZZ	S	Ferrite Bead	AB
J 0019	RBLN-0037CEZZ	S	Ferrite Bead	AB
P 2401	QPLGN0642CEZZ	S	Connector	AB
P 2402	QPLGN1142CEZZ	S	Connector	AD
P 2403	QPLGN0285FJZZ	S	Connector	AG
SC 2401	QSOCZ0108BMZZ	S	RGB Connector	AE

REF. NO	PARTS	★	DESCRIPTION	CODE
SC 2402	QSOCZ0109BMZZ	S	RGB Connector	AE
SC 2403	QSOCZ0109BMZZ	S	RGB Connector	AE

PWB-F FRONT A / V UNIT

DIODES

REF. NO	PARTS	★	DESCRIPTION	CODE
D 1401	RH-EX0549BMZZ	S	Zener TZMC7V5	AA
D 1402	RH-EX0549BMZZ	S	Zener TZMC7V5	AA

COILS

REF. NO	PARTS	★	DESCRIPTION	CODE
L 1300	VP-DF3R3K0000	S	3.3μH	AB
L 1301	VP-DF3R3K0000	S	3.3μH	AB

CAPACITORS

REF. NO	PARTS	★	DESCRIPTION	CODE
C 1300	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 1302	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 1305	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 1306	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 1407	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 1408	VCCCTV1HH101J	S	100p 50V Ceramic	AA

RESISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
R 1300	VRD-RA2BE221J	S	220 1/8W Carbon	AA
R 1301	VRS-TV1JD391J	S	390 1/10W Metal Oxide	AA
R 1302	VRS-TV1JD391J	S	390 1/10W Metal Oxide	AA
R 1314	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 1315	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 1316	VRS-TV1JD221J	S	220 1/10W Metal Oxide	AA
R 1406	VRD-RA2EE750J	S	75 1/4W Carbon	AA
R 1409	VRD-RA2EE750J	S	75 1/4W Carbon	AA

MISCELLANEOUS PARTS

REF. NO	PARTS	★	DESCRIPTION	CODE
J 1301	QJAKJ0047CEZZ	S	Earphone Jack	AG
J 1400	QJAKZ0015CEZZ	S	Jack	AM
P 1301	QPLGN0341CEZZ	S	Connector	AA
P 1400	QPLGN0641CEZZ	S	Connector	AB

PWB-G DOLBY PROCESSOR UNIT

INTEGRATED CIRCUITS

REF. NO	PARTS	★	DESCRIPTION	CODE
IC 3301	RH-IX1604BMZZ	S	DSP56004	BD
IC 3302	RH-IX1605BMZZ	S	APU2471	AY
IC 3303	RH-IX1628BMZZ	S	MC HC4024D	AE
IC 3304	RH-IX1608BMZZ	S	74S04	AD
IC 3305	RH-IX1606BMZZ	S	62256	AT
IC 3306	RH-IX1429BMZZ	S	L7805CV	AE

TRANSISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
Q 3301	VS2SC2412KQ-1	S	2SC2412	AA
Q 3302	VS2SC2412KQ-1	S	2SC2412	AA
Q 3303	VS2SC2412KQ-1	S	2SC2412	AA
Q 3304	VS2SC2412KQ-1	S	2SC2412	AA

DIODES

REF. NO	PARTS	★	DESCRIPTION	CODE
D 3301	RH-DX0551BMZZ	S	LL4148	AA

PACKADGED CIRCUITS

REF. NO	PARTS	★	DESCRIPTION	CODE
X 3301	RCRSB0203BMZZ	S	Crystal 18.432 MHz	AG

COILS

REF. NO	PARTS	★	DESCRIPTION	CODE
L 3312	VP-NM100KR42N	S	10μH	AC
L 3313	VP-NM3R3MR19N	S	3.3μH	AC
L 3314	VP-NM3R3MR19N	S	3.3μH	AC
L 3315	VP-NM3R3MR19N	S	3.3μH	AC
L 3316	VP-NM100KR42N	S	10μH	AC
L 3317	VP-NM100KR42N	S	10μH	AC
L 3318	VP-NM3R3MR19N	S	3.3μH	AC
L 3319	VP-NM3R3MR19N	S	3.3μH	AC
L 3320	VP-NM3R3MR19N	S	3.3μH	AC
L 3321	VP-NM3R3MR19N	S	3.3μH	AC
L 3322	VP-NM3R3MR19N	S	3.3μH	AC
L 3323	VP-NM100KR42N	S	10μH	AC

CAPACITORS

REF. NO	PARTS	★	DESCRIPTION	CODE
C 3301	VCKYTV1EF224Z	S	0.22 25V Ceramic	AA
C 3302	VCEAGA1CW337M	S	330 16V Electrolytic	AC
C 3303	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3304	VCKYTV1HB222K	S	2200p 50V Ceramic	AA
C 3307	VCEAGA1CW337M	S	330 16V Electrolytic	AC
C 3308	VCKYTV1HB222K	S	2200p 50V Ceramic	AA
C 3309	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3310	VCEAGA1AW107M	S	100 10V Electrolytic	AA
C 3311	VCEAGA1CW477M	S	470 16V Electrolytic	AC
C 3312	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3314	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3315	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3316	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3317	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3318	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3319	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3321	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3322	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3323	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3324	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3325	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3327	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3328	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3329	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 3330	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 3331	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3332	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3333	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3334	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3335	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3336	VCKYTV1HB122K	S	1200p 50V Ceramic	AA
C 3337	VCEAGA1AW107M	S	100 10V Electrolytic	AA
C 3351	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 3352	VCCCTV1HH100D	S	10p 50V Ceramic	AA
C 3353	VCKYTV1HF103Z	S	0.01 50V Ceramic	AA
C 3354	VCKYTV1EF224Z	S	0.22 25V Ceramic	AA
C 3355	VCKYTV1EF474Z	S	0.47 25V Ceramic	
C 3356	VCKYTV1EB104K	S	0.1 25V Ceramic	AA
C 3357	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3358	VCEA0A1CW108M	S	1000 16V Electrolytic	AC

RESISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
R 3301	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3302	VRS-TV1JD683J	S	68K 1/10W Metal Oxide	AA
R 3303	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3304	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3305	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3306	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3307	VRS-TV1JD683J	S	68K 1/10W Metal Oxide	AA
R 3308	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3309	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3311	VRS-TQ2BD220J	S	22 1/8W Metal Oxide	AA
R 3312	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3313	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3314	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 3315	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 3316	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 3319	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
R 3320	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3321	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3322	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3323	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3324	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3325	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3326	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3327	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3328	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3329	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3330	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3331	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3333	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA
R 3334	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 3335	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 3336	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3337	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA
R 3338	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 3350	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 3351	VRS-TV1JD561J	S	560 1/10W Metal Oxide	AA
R 3352	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3353	VRS-TV1JD103J	S	10K 1/10W Metal Oxide	AA
R 3354	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3355	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 3358	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 3359	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3360	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3361	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3362	RR-XZ0120BMZZ	S	47 1/3W Fuse Resistor	AB
R 3363	VRS-TV1JD222J	S	2.2K 1/10W Metal Oxide	AA
R 3364	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 3366	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA

MISCELLANEOUS PARTS

REF. NO	PARTS	★	DESCRIPTION	CODE
FB 3301	RCORF0003GEZZ	S	Ferrite	AC
FB 3302	RCORF0003GEZZ	S	Ferrite	AC
FB 3303	RCORF0003GEZZ	S	Ferrite	AC
FB 3304	RCORF0003GEZZ	S	Ferrite	AC
FB 3305	RCORF0003GEZZ	S	Ferrite	AC
FB 3306	RCORF0003GEZZ	S	Ferrite	AC
P 3300	QPLGZ1138CEZZ	S	Connector	AD
P 3301	QPLGN1041CEZZ	S	Connector	AB
P 3302	QPLGN1141CEZZ	S	Connector	AC
P 3303	QTIPM0017CEFM	S		AA

PWB-H DOLBY POWER UNIT

INTEGRATED CIRCUITS

REF. NO	PARTS	★	DESCRIPTION	CODE
IC 3100	VHITDA7481/-1	S	TDA7481	AP
IC 3101	VHITDA7480/-1	S	TDA7481	AK
IC 3102	VHITDA7480/-1	S	TDA7481	AK
IC 3103	VHITDA7480/-1	S	TDA7481	AK

TRANSISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
Q 3100	VS2SC2412KQ-1	S	2SC2412	AA
Q 3101	VS2SA1037KQ-1	S	BC807	AA
Q 3102	VS2SC2412KQ-1	S	2SC2412	AA
Q 3103	VS2SA1037KQ-1	S	BC807	AA
Q 3104	VS2SC2412KQ-1	S	2SC2412	AA
Q 3106	VS2SC2412KQ-1	S	2SC2412	AA
Q 3107	VS2SA1037KQ-1	S	BC807	AA
Q 3108	VS2SC2412KQ-1	S	2SC2412	AA

DIODES

REF. NO	PARTS	★	DESCRIPTION	CODE
D 3101	RH-DX0551BMZZ	S	LL4148	AA
D 3102	RH-DX0551BMZZ	S	LL4148	AA
D 3115	RH-DX0551BMZZ	S	LL4148	AA
D 3117	RH-DX0551BMZZ	S	LL4148	AA
D 3118	RH-DX0551BMZZ	S	LL4148	AA
D 3119	RH-DX0551BMZZ	S	LL4148	AA

COILS

REF. NO	PARTS	★	DESCRIPTION	CODE
L 3100	VP-CF1R0M0000	S	1µH	AB
L 3101	VP-CF1R0M0000	S	1µH	AB
L 3102	RCILP0242BMZZ	S	100µH	AM
L 3103	VP-CF1R0M0000	S	1µH	AB
L 3104	VP-CF1R0M0000	S	1µH	AB
L 3105	RCILP0278BMZZ	S		AD
L 3106	VP-CF1R0M0000	S	1µH	AB
L 3107	VP-CF1R0M0000	S	1µH	AB
L 3108	RCILP0278BMZZ	S		AD
L 3109	VP-CF1R0M0000	S	1µH	AB
L 3110	VP-CF1R0M0000	S	1µH	AB
L 3111	RCILP0278BMZZ	S		AD

CAPACITORS

REF. NO	PARTS	★	DESCRIPTION	CODE
C 3100	VCEAGA1CW336M	S	33 16V Electrolytic	AA
C 3101	VCEAGA1CW337M	S	330 16V Electrolytic	AC
C 3103	VCE9GA1HW225M	S	2.2 50V Electrolytic	AB
C 3104	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 3105	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 3106	VCE9GA1HW225M	S	2.2 50V Electrolytic	AB
C 3107	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 3108	RC-FZ9224BMNJ	J	0.22 63V Mylar	AC
C 3109	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 3110	VCEAGA1EW476M	S	47 25V Electrolytic	AA
C 3111	VCEAGA1EW476M	S	47 25V Electrolytic	AA
C 3112	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3113	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3114	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3115	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3116	VCKYTV1HB561K	S	560p 50V Ceramic	AA
C 3117	RC-FZ9474BMNJ	J	0.47 63V Mylar	AD
C 3118	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3119	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3120	RC-FZ9224BMNJ	J	0.22 63V Mylar	AC
C 3121	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 3122	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 3123	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 3124	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3125	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3126	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3127	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 3128	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 3129	VCKYTV1HB561K	S	560p 50V Ceramic	AA
C 3130	RC-FZ9474BMNJ	J	0.47 63V Mylar	AD
C 3132	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3133	VCE9GA1HW225M	S	2.2 50V Electrolytic	AB
C 3134	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3135	RC-FZ9224BMNJ	J	0.22 63V Mylar	AC
C 3136	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 3137	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 3138	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 3139	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3140	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3141	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3142	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 3143	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 3144	VCKYTV1HB561K	S	560p 50V Ceramic	AA
C 3145	RC-FZ9684BMNJ	J	0.68 63V Mylar	AD
C 3147	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3148	VCE9GA1HW225M	S	2.2 50V Electrolytic	AB
C 3149	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3150	RC-FZ9224BMNJ	J	0.22 63V Mylar	AC
C 3151	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 3152	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 3153	VCEAGA1EW227M	S	220 25V Electrolytic	AA
C 3154	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA

REF. NO	PARTS	★	DESCRIPTION	CODE
C 3155	VCKYTV1HF104Z	S	0.1 50V Ceramic	AA
C 3156	VCCCTV1HH101J	S	100p 50V Ceramic	AA
C 3157	RC-FZ9104BMNJ	J	0.1 63V Mylar	AB
C 3158	VCKYTV1HB472K	S	4700p 50V Ceramic	AA
C 3159	VCKYTV1HB561K	S	560p 50V Ceramic	AA
C 3160	RC-FZ9684BMNJ	J	0.68 63V Mylar	AD
C 3162	VCE9GA1CW106M	S	10 16V Electrolytic (N/P)	AC
C 3163	VCE9GA1CW106M	S	10 16V Electrolytic (N/P)	AC
C 3166	VCKYTV1HB392K	S	3900 50V Ceramic	AA
C 3167	VCKYTV1HB392K	S	3900 50V Ceramic	AA
C 3170	VCCCTV1HH561J	S	560p 50V Ceramic	AA
C 3171	VCCCTV1HH561J	S	560p 50V Ceramic	AA

RESISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
R 3101	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 3102	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 3103	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 3104	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 3105	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 3106	VRS-TV1JD821J	S	820 1/10W Metal Oxide	AA
R 3107	VRS-TV1JD101J	S	100 1/10W Metal Oxide	AA
R 3108	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 3109	VRS-TV1JD223J	S	22K 1/10W Metal Oxide	AA
R 3111	VRS-TV1JD821J	S	820 1/10W Metal Oxide	AA
R 3112	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 3113	VRS-TV1JD272J	S	2.7K 1/10W Metal Oxide	AA
R 3114	VRS-TV1JD182J	S	1.8K 1/10W Metal Oxide	AA
R 3115	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 3116	VRS-TV1JD472F	S	4.7K 1/10W Metal Oxide	AA
R 3117	VRS-TQ2BD000J	S	Jumper	AA
R 3119	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 3120	VRD-RA2HD151J	S	150 1/2W Carbon	AA
R 3121	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 3122	VRS-TV1JD103F	S	10K 1/10W Metal Oxide	AA
R 3123	VRS-TV1JD392F	S	3.9K 1/10W Metal Oxide	AA
R 3125	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 3126	VRD-RA2HD151J	S	150 1/2W Carbon	AA
R 3128	VRS-TQ2BD000J	S	Jumper	AA
R 3129	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 3130	VRS-TV1JD103F	S	10K 1/10W Metal Oxide	AA
R 3131	VRS-TV1JD392F	S	3.9K 1/10W Metal Oxide	AA
R 3133	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 3134	VRD-RA2HD151J	S	150 1/2W Carbon	AA
R 3136	VRS-TQ2BD000J	S	Jumper	AA
R 3137	VRS-TV1JD273J	S	27K 1/10W Metal Oxide	AA
R 3138	VRS-TV1JD103F	S	10K 1/10W Metal Oxide	AA
R 3139	VRS-TV1JD392F	S	3.9K 1/10W Metal Oxide	AA
R 3141	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 3142	VRD-RA2HD151J	S	150 1/2W Carbon	AA
R 3144	VRS-TQ2BD000J	S	Jumper	AA
R 3145	VRD-RA2BE104J	S	100K 1/8W Carbon	AA
R 3146	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 3147	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3148	VRS-TV1JD472J	S	4.7K 1/10W Metal Oxide	AA
R 3149	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 3150	VRS-TV1JD104J	S	100K 1/10W Metal Oxide	AA
R 3151	VRS-TV1JD103F	S	10K 1/10W Metal Oxide	AA
R 3152	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 3153	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 3154	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 3155	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 3156	VRD-RA2BE223J	S	22K 1/8W Carbon	AA
R 3157	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 3160	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 3161	VRS-TV1JD123J	S	12K 1/10W Metal Oxide	AA
R 3162	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA
R 3163	VRS-TV1JD000J	S	0 1/10W Metal Oxide	AA

MISCELLANEOUS PARTS

REF. NO	PARTS	★	DESCRIPTION	CODE
P 3101	QPLGN1041CEZZ	S	Connector	AB
P 3104	QTIPM0017CEFM	S		AA
SC 3100	QSOCN0485CEZZ	S	Socket	AC
SC 3101	QSOCN0685CEZZ	S	Socket	AD
SC 3102	QSOCZ1138CEZZ	S	Socket	AD

PWB-I EXTERNAL SPEAKERS UNIT

CAPACITORS

REF. NO	PARTS	★	DESCRIPTION	CODE
C 3201	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3202	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3203	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3204	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3205	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3206	VCKYTV1HB102K	S	1000p 50V Ceramic	AA

RESISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
R 3200	VRS-TW2ED331J	S	330 1/4W Metal Oxide	AA
R 3201	VRS-TW2ED331J	S	330 1/4W Metal Oxide	AA
R 3202	VRS-TW2ED331J	S	330 1/4W Metal Oxide	AA
R 3203	VRS-TW2ED331J	S	330 1/4W Metal Oxide	AA

MISCELLANEOUS PARTS

REF. NO	PARTS	★	DESCRIPTION	CODE
P 3201	QPLGN0485CEZZ	S	Connector	AC
P 3202	QPLGN0442CEZZ	S	Connector	AB
	QJAKE0070CEZZ	S	Jack	AD

PWB-J EXTERNAL SPEAKERS UNIT

CAPACITORS

REF. NO	PARTS	★	DESCRIPTION	CODE
C 3207	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3208	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3209	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3210	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3211	VCKYTV1HB102K	S	1000p 50V Ceramic	AA
C 3212	VCKYTV1HB102K	S	1000p 50V Ceramic	AA

RESISTORS

REF. NO	PARTS	★	DESCRIPTION	CODE
R 3204	VRS-TW2ED331J	S	330 1/4 Metal Oxide	AA
R 3205	VRS-TW2ED331J	S	330 1/4W Metal Oxide	AA
R 3206	VRS-TW2ED331J	S	330 1/4 Metal Oxide	AA
R 3207	VRS-TW2ED331J	S	330 1/4W Metal Oxide	AA
R 3208	VRS-TW2ED331J	S	330 1/4W Metal Oxide	AA
R 3210	VRS-TW2ED331J	S	330 1/4W Metal Oxide	AA

MISCELLANEOUS PARTS

REF. NO	PARTS	★	DESCRIPTION	CODE
P 3203	QPLGN0685CEZZ	S	Connector	AC
	QJAKE0070CEZZ	S	Jack	AD

PWB-K AUDIO COILS

COILS

REF. NO	PARTS	★	DESCRIPTION	CODE
L 3112	RCILP0262BMZZ	S	5mH	AG
L 3113	RCILP0262BMZZ	S	5mH	AG
L 3114	RCILP0242BMZZ	S	100μH	AM

MISCELLANEOUS PARTS

REF. NO	PARTS	★	DESCRIPTION	CODE
P 3105	QPLGN0441CEZZ	S	Connector 4pin	AB
P 3106	QPLGN0841CEZZ	S	Connector	AB
P 3107	QPLGN0241CEZZ	S	Connector	AA

REF. NO	PARTS	★	DESCRIPTION	CODE	REF. NO	PARTS	★	DESCRIPTION	CODE
MISCELLANEOUS PARTS					**CABINET PARTS**				
⚠	QACCB5007BMZZ	S	AC Cord	AU	1	CCABA1243BMV0	S	Front Cabinet 76EF19H	BR
	RCORF0002BMZZ	S	Ferrite	AK	1	CCABA1239BMV0	S	Front Cabinet 76EF20H	BN
	RRMCG1067BMSA	S	Remote Control Unit	AX	1 - 1	GDORF1056BMSA	S	Door 76EF19H	AF
	TINS-6621BMZZ	S	Operation Manual 76EF19H	AQ	1 - 1	GDORF1055BMSA	S	Door 76EF20H	AE
	TINS-6718BMN0	S	Operation Manual 76EF20H	AQ	1 - 2	HDECQ0044BMSA	S	Window	AC
	VSP1306PB08WE	S	(1X) Speaker 10W 16 ohms	AV	1 - 3	HDECQ0043BMSA	S	Window Power	AC
	CBOXS1002BMV0	S	Complete Internal Speaker Box	AZ	1 - 4	HBDGB3510BMSA	S	Badge SHARP	AL
	VSP1306PB067S	S	Central Spk 12W 8ohm 76EF20H	AR	1 - 5	JBTN-1056BMSA	S	Button Up/Down	AD
	CSP-Z0002BM01	S	(2X)Ext. Surround Spk 76EF20H	BT	1 - 6	JBTN-1055BMSA	S	Button Power	AE
					1 - 7	HINDP5106BMSA	S	Indicator	AE
					1 - 8	PKAI-1083BM00	S	Door Latch	AF
					2	CCABB1089BMV0	S	Rear Cabinet 76EF19H	
					2	CCABB1087BMV0	S	Rear Cabinet 76EF20H